
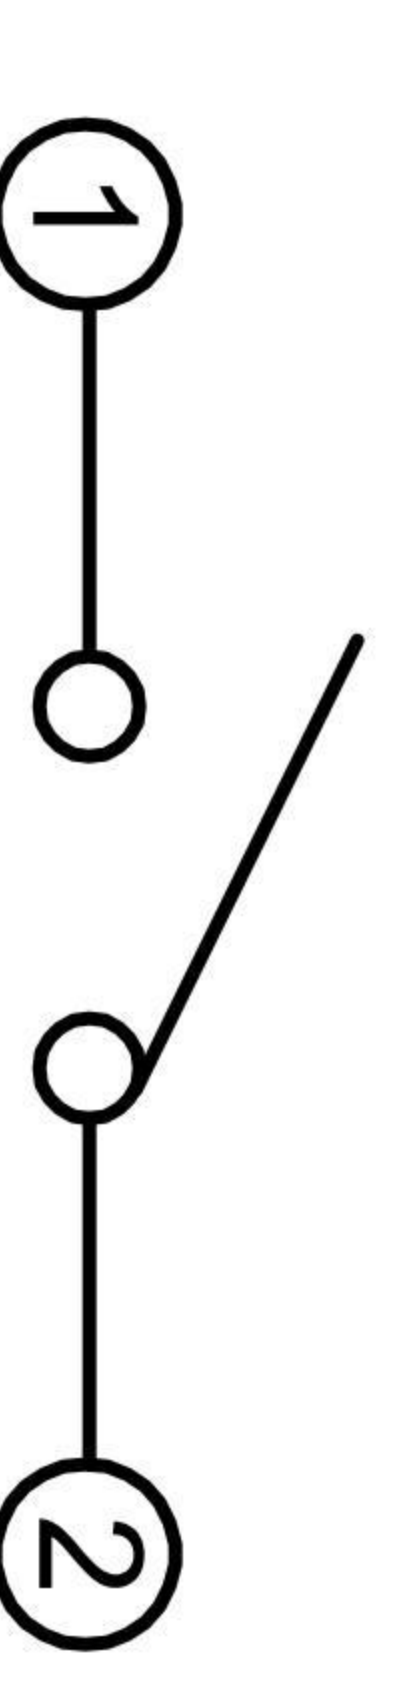



P.C.B LAYOUT
BOTTOM VIEW

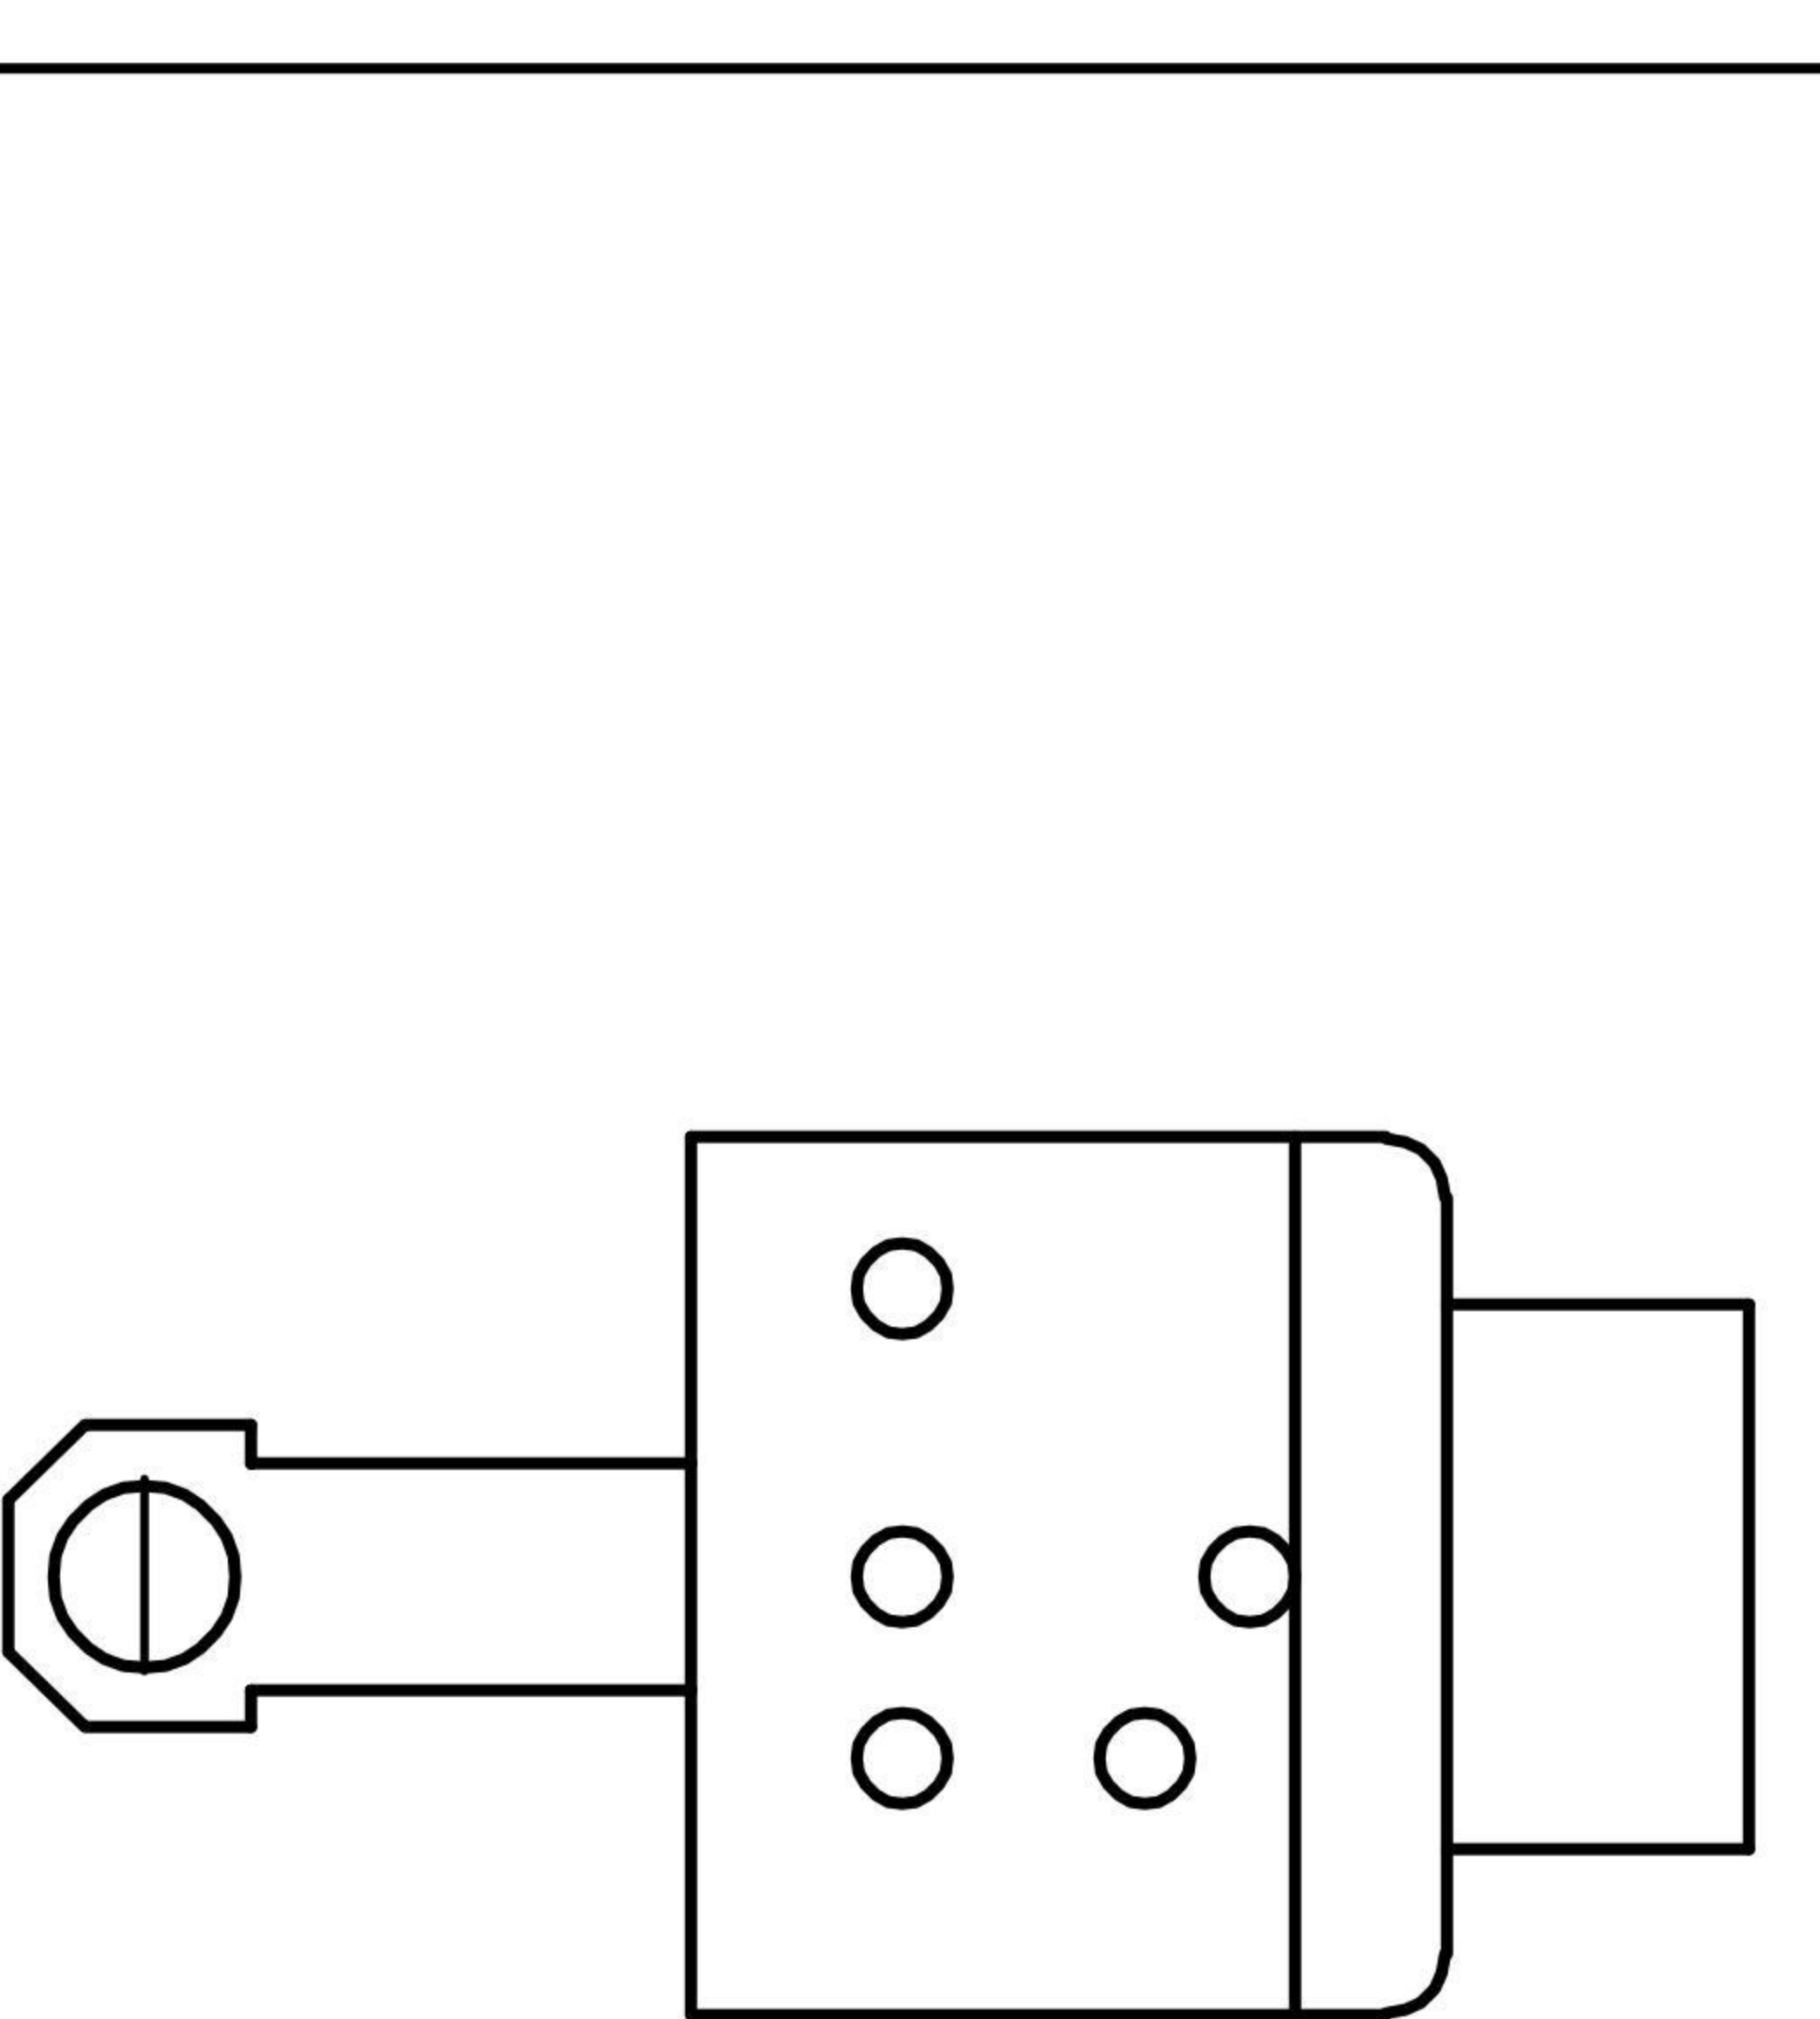


SCHMATIC (NON-SHORTING)

- G-Switch Specification:**
1. Operating temperature range : -40 °C to +85 °C
 2. Rating : 50mA, 12V DC
 3. Insulation resistance : 100MΩ min, 100V DC
 4. Dielectric strength : 250V AC for 1 min
 5. Contact Resistance : 100m Ω max.

6	TERMINAL	COPPER ALLOY	Ag PLATING
5	SPRING	STAINLESS STEEL	
4	CAM STICK	STAINLESS STEEL	
3	CASE	NYLON	GREY
2	COVER	NYLON	BLACK
1	KNOB	NYLON	BLACK
NO.	PART NAME	MATERIAL	REMARK

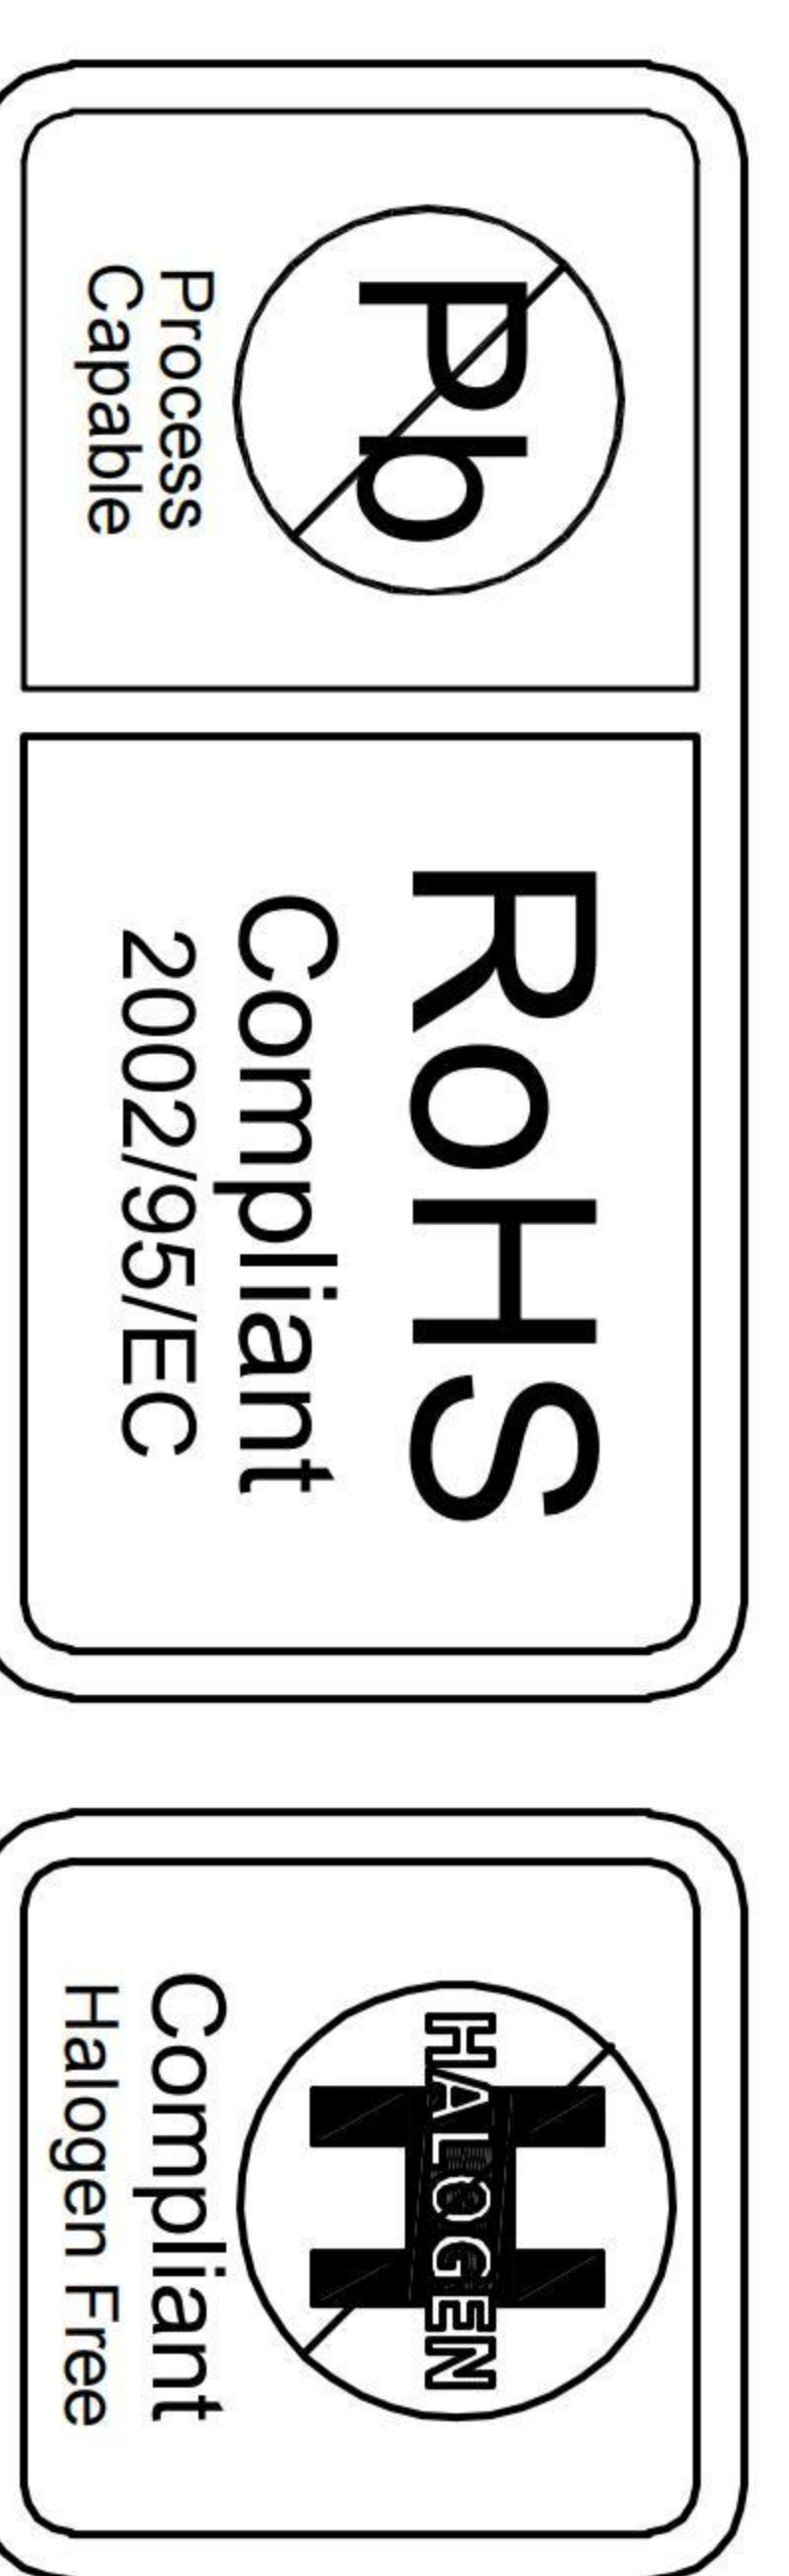

SCALE: 4:1	UNIT: mm	Title: Push Switch 5.8x5.8x7.4mm	
SIZE: A4		Mold Code: PS-5824WVB-2PN	
Unless otherwise General Tolerance:		DRAWN	CHECKED
X	+0.30	Xia	Chen
X.X	+0.20		
X.XX	+0.15		
X.XXX	+0.10		
Angles	±3°		
		APPROVED	DATE
		Chen	2023.02.01
		REV: A0	SHEET: 1/1

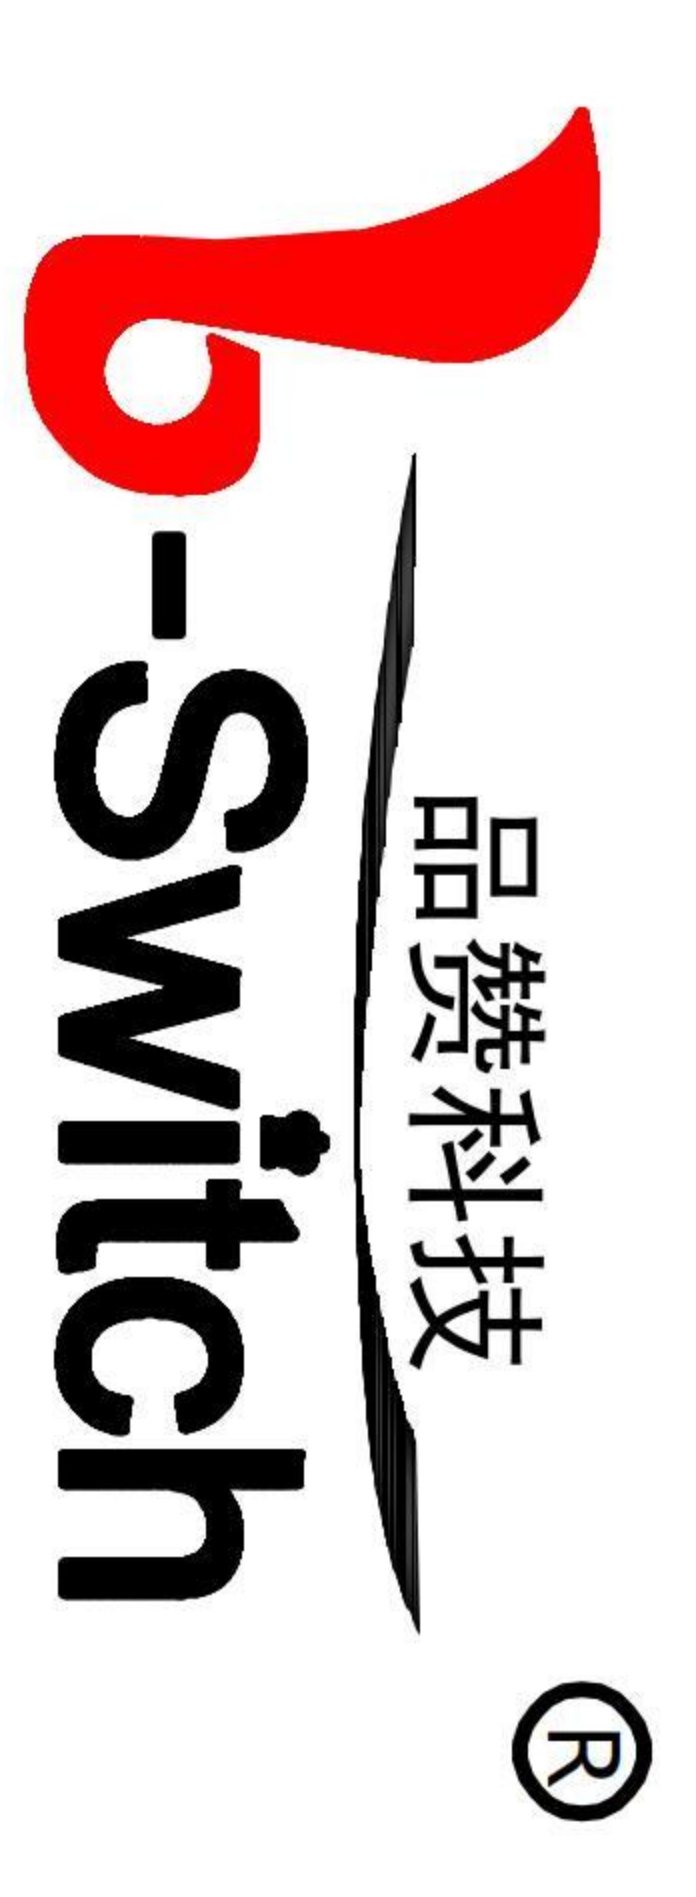

A

B

C

D

E

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [G-Switch](#) manufacturer:

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [M22-D-R-GB0/K11](#) [67021K512](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [FLT 2U EE 01A](#)
[MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#)
[861K11911T01A07](#) [861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [9533CD4+U574+U4922](#) [99-450.837](#) [99-453.837](#)
[A2PMA1X03EC56](#) [A3A-7310](#) [A3A-7340](#) [12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#)
[1211500044](#) [121194](#) [1212MRA](#) [1232A6NF](#) [1241.1183.7047](#) [121489](#) [1223A2ULCSA](#) [1241.1183.8000](#) [1241.1183.8029](#) [D5P-MT4](#)
[13435AG](#) [13445AD29GX768](#) [AG23-L2](#) [AH165-2SGLG1TE3](#)