


8	TERMINAL	BRASS	6	Ag PLATED
7	CASE	PPA	1	BLACK
6	LOCK PIN	SUS WIRE	1	NATURAL
5	SPRING	SUS WIRE	1	NATURAL
4	CONTACT	BRONZE	2	Ag PLATED
3	KNOB	PPA	1	WHITE
2	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING



	Unless otherwise specified, Tolerance:	
	X	±0.30
	X.X	±0.20
	X.XX	±0.15
	X.XXX	±0.10
Angles	±3°	

G-Switch Electronic (HongKong) CO., Ltd.		Molde code: PS-6824DVX-6PN	
DESIGN	Feng ²	DATE	2022.08.12
CHECKED		DATE	
APPROVED		DATE	
http://www.dg-switch.com		REV.	X1
TEL:0769-82388879		SCALE:	4:1
		SHEET:	1/1
		UNIT:	mm

G-Switch Specification:
 Operating temperature range: -40°C to +85°C
 Rating: 0.5A, 24V DC
 Insulation resistance: 100MΩ min., 100V DC
 Dielectric strength: 250V AC for 1 min
 Contact resistance: 100mΩ max.
 Switch lifetime: 30,000Cycles

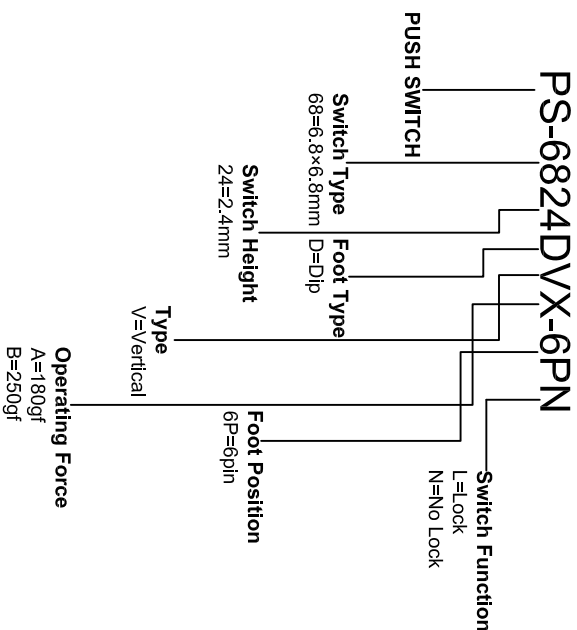

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [G-Switch](#) manufacturer:

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [M22-D-R-GB0/K11](#) [67021K512](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [FLT 2U EE 01A](#)
[MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#)
[861K11911T01A07](#) [861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [9533CD4+U574+U4922](#) [99-450.837](#) [99-453.837](#)
[A2PMA1X03EC56](#) [A3A-7310](#) [A3A-7340](#) [12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#)
[1211500044](#) [121194](#) [1212MRA](#) [1232A6NF](#) [1241.1183.7047](#) [121489](#) [1223A2ULCSA](#) [1241.1183.8000](#) [1241.1183.8029](#) [D5P-MT4](#)
[13435AG](#) [13445AD29GX768](#) [AG23-L2](#) [AH165-2SGLG1TE3](#)