


## LCR-8200 Series Specifications

The specifications apply when the LCR-8200 series is powered on for at least 60 minutes.

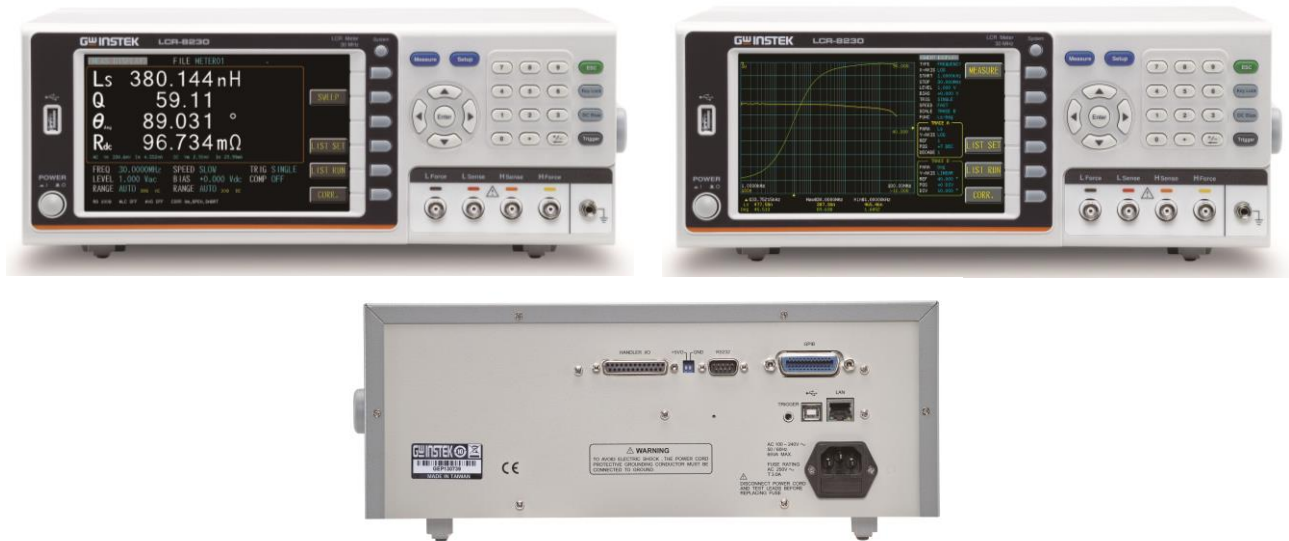

SPECIFICATION				
MODEL	LCR-8230	LCR-8220	LCR-8210	LCR-8205
TEST FREQUENCY				
	DC, 10Hz ~ 30MHz; 6 Digits, $\pm 0.0007\%$	DC, 10Hz ~ 20MHz; 6 Digits, $\pm 0.0007\%$	DC, 10Hz ~ 10MHz; 6 Digits, $\pm 0.0007\%$	DC, 10Hz ~ 5MHz; 6 Digits, $\pm 0.0007\%$
OUTPUT IMPEDANCE				
	25 $\Omega$ / 100 $\Omega$ SELECTABLE			
BASIC ACCURACY				
	$\pm 0.08\%$			
TEST SPEED				
	MAX: 25ms(>10kHz), FAST: 50ms(>20Hz), MEDIUM: 100ms SLOW: 300ms, SLOW2: 600ms			
TEST SIGNAL LEVEL				
AC Voltage:	10mV ~ 2Vrms (FREQ. $\leq$ 1MHz), 10mV ~ 1Vrms (FREQ. > 1MHz or FREQ. $\leq$ 1MHz and RO=25 $\Omega$ )			
AC Current:	100 $\mu$ A ~ 20mArms (RO=100 $\Omega$ ), 200 $\mu$ A ~ 40mArms (RO=25 $\Omega$ )			
DCR Voltage:	1Vdc (40mA max.)			
MEASUREMENT PARAMETERS				
	Maximum four parameters can be measured and displayed at the same time Impedance (Z), Inductance (Ls / Lp), Capacitance (Cs / Cp), AC Resistance (Rs / Rp), Quality Factor (Q), Dissipation Factor (D), Admittance (Y), Conductance (G), Reactance (X), Phase Angle ( $\theta d$ / $\theta r$ ), Susceptance (B), DC Resistance (Rdc)			
LIST MEASUREMENT				
Listed Steps:	15			
Listed Parameters:	Freq/Vac/Iac/DC Bias/Comp/BIN			
Trigger:	AUTO, REPEAT, SINGLE			

MODEL	LCR-8230	LCR-8220	LCR-8210	LCR-8205
<b>SWEEP MEASUREMENT</b>				
Swept Graphical:	Two of measurement parameters			
Swept Parameters:	Freq/Vac/Iac, Keep Trace			
<b>OTHER FUNCTIONS</b>				
Auto Level Control (ALC):	Standard			
DC Bias:	0 ~ ±12V			
Handler:	PASS, FAIL and OK, NG or BIN 1-9			
<b>OTHER FEATURES</b>				
Correction:	Open/Short/HF Load/Load			
V/I Monitor:	Vac, Iac, Vdc, Idc			
Comparator:	Value, Δ, Δ %			
Buzzer:	OFF, Pass, Fail			
Average:	1 to 64			
DISPLAY	7" LCD color display (800x480)			
INTERFACE	USB/GPIB/LAN/RS-232/Handler/USB Host/TRIGGER Input			
POWER SOURCE	AC 100V~240V, 50/60Hz; Consumption: 65VA (max.)			
DIMENSIONS & WEIGHT	346 (W) X 145 (H) X 335 (D) mm; Approx. 3.3kg			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Multimeters](#) category:*

*Click to view products by [GW Connect](#) manufacturer:*

Other Similar products are found below :

[8009](#) [6111-517](#) [FS881](#) [40705X](#) [USB390A](#) [780417A](#) [GPT-9904](#) [382099](#) [589250](#) [780418](#) [C.A 6131](#) [C.A 6133](#) [30XR](#) [34XR](#) [35XP](#) [TESTO](#)  
[745](#) [0590 7450](#) [TESTO 760-3](#) [0590 7603](#) [440012](#) [AX-155](#) [AX-174](#) [AX-178](#) [AX-18B](#) [AX-190A](#) [AX-503](#) [AX-507B](#) [AX-572](#) [AX-594](#) [AX-](#)  
[LCR41A](#) [AX-MS8221A](#) [AX-MS8250](#) [AX-PDM01](#) [AX-T520](#) [AX-T901](#) [AX-T903](#) [BAT-250-EUR](#) [BM233](#) [BM805S](#) [BM807S](#) [BM817S](#)  
[BM827S](#) [BM829S](#) [BM857S](#) [BM859S](#) [BM867S](#) [BM905S](#) [33XR](#) [UNITEST TESTFIX 9023](#) [37XR](#) [UT56](#) [UT58C](#)