




- Product summary
- Printed Circuit-Board transformers
 - Frame size BV 20
 - Frame size EI 30
 - Frame size EI 34
 - Frame size EI 38
 - Frame size EI 42
 - Frame size EI 48
 - Frame size EI 54
 - Frame size EI 60
 - Frame size EI 66
 - Frame size EI 78-EI 96
 - Frame size EI 78
 - Frame size EI 84
 - Frame size EI 96
- Flat-type transformers
- Standard converter
- Mains chokes (PFC)
- RAST 5 transformers
- SMPS transformers
- Special solutions / customized versions
- Transformer for Top-Hat-Rail
- Fixtures
- Non-encapsulated transformers
- Fine-wire-coils
- Electrical Power Supply Facilities
- Compact power supply units
- Energy storage choke
- Toroidal transformers
- Ignition transformers / Electric ignition devices
- Product search
- Catalog

EI 30 Printed circuit-board transformers, output capacity up to 3.6 VA



- high capacity up to 3.6 VA
- primary voltages from 24 V to 440 V
- secondary voltage 6 V to 24 V or 2 x 6 V to 2 x 24 V respectively
- minimal sizes available
- test certifications to ENEC 10-, VDE, UL- and CSA-regulations
- absolutely short-circuit-proof
- vacuum encapsulated, bobbin with dual chamber windings
- temperature class ta 40°C/F and ta 70°C/F
- high electrical safety and long service-life properties
- quality test certified per item
- excellent temperature fluctuation resistance properties
- self-extinguishing cast housing and sealing material

Several hundreds of types provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

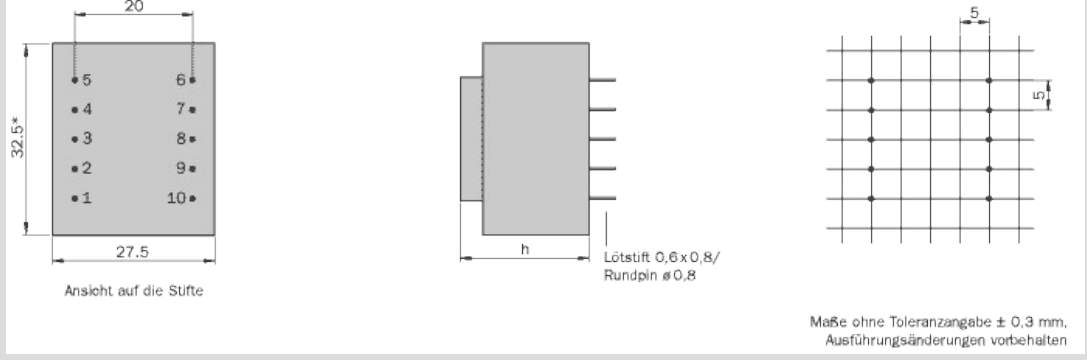

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Height (h)	Weight	Packaging unit (pieces)
BV EI 301 ... / 5.5 mm	0.6 VA	0.5/0.7 VA	15.2 mm	0.044 kg	50
BV EI 302 ... / 10.5 mm	1.8 VA	1.5 VA	21.8 mm	0.070 kg	50
BV EI 303 ... / 12.5 mm	2.3 VA	1.9 VA	23.8 mm	0.081 kg	50
BV EI 304 ... / 15.5 mm	2.6 VA	2.1 VA	27.4 mm	0.099 kg	50
BV EI 305 ... / 18.0 mm	3.0 VA	2.3 VA	29.5 mm	0.111 kg	50
BV EI 306 ... / 23.0 mm	3.2 VA	3.0 VA	34.0 mm	0.135 kg	50

All transformers of the EI 30 series are produced from long-life- and experienceproven raw materials and manufactured on the most modern production equipment. In order to monitor ongoing quality standards, dual 100% item tests and sporadic 200 hours durability short-circuit testing is carried out after production. All consignments are accompanied by a test certificate to ensure that customers enjoy 100% guaranteed electrical safety in their equipment.

EI 301 ...

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Size (h)	Weight	Packaging unit (pieces)
BV EI 301 ... / 5.5 mm	0.6 VA	0.5/0.7 VA	15.2 mm	0.044 kg	50

Serial-Types EI 301 ...

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.
display	BV EI 301 2069	0.5	1x 230	1-5	2x 18	14	6-7/9-10 2x 27.2
display	BV EI 301 2783	0.5	1x 230	1-5	1x 10	50	7-9 1x 14.9
display	BV EI 301 2824	0.5	1x 230	1-5	1x 12	42	7-9 1x 18
display	BV EI 301 2845	0.5	1x 230	1-5	1x 15	33	7-9 1x 22.8
display	BV EI 301 2911	0.5	1x 230	1-5	1x 9	56	7-9 1x 14.7
display	BV EI 301 2967	0.5	1x 230	1-5	1x 18	28	7-9 1x 26.5
display	BV EI 301 3005	0.5	1x 230	1-5	1x 6	83	7-9 1x 10.2
display	BV EI 301 3017	0.5	1x 230	1-5	1x 7.5	67	7-9 1x 12.2
display	BV EI 301 3020	0.5	1x 230	1-5	1x 21	24	7-9 1x 33.1

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.
display	BV EI 301 2093	0.6	1x 230	1-5	1x 15	40	7-9 1x 23.7
display	BV EI 301 2094	0.6	1x 230	1-5	1x 24	25	7-9 1x 38.6
display	BV EI 301 2104	0.6	1x 230	1-5	1x 6	100	7-9 1x 9.6
display	BV EI 301 2720	0.6	1x 230	1-5	1x 12	50	7-9 1x 19.4
display	BV EI 301 2985	0.6	1x 230	1-5	1x 18	33	7-9 1x 27.8
display	BV EI 301 3006	0.6	1x 230	1-5	1x 10	60	7-9 1x 16.1

display	BV EI 301 3007	0.6	1x 230	1-5	1x 21	28	7-9	1x 33.2
display	BV EI 301 3016	0.6	1x 230	1-5	1x 9	67	7-9	1x 14.2
display	BV EI 301 3018	0.6	1x 230	1-5	1x 7.5	80	7-9	1x 11.6

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2343	0.5	1x 24	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2784	0.5	1x 24	1-5	1x 10	50	7-9	1x 14.9

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
---	BV EI 301 2497	0.5	1x 42	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2785	0.5	1x 42	1-5	1x 10	50	7-9	1x 14.9

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2300	0.5	1x 110	1-5	1x 12	42	7-9	1x 18
display	BV EI 301 2334	0.5	1x 110	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2721	0.5	1x 110	1-5	1x 15	33	7-9	1x 22.8
display	BV EI 301 2786	0.5	1x 110	1-5	1x 10	15	7-9	1x 14.9

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2503	0.6	1x 120	1-5	1x 12	50	7-9	1x 19.4
display	BV EI 301 2713	0.6	1x 110	1-5	1x 12	50	7-9	1x 19.4
display	BV EI 301 2850	0.6	1x 115	1-5	1x 10	60	7-9	1x 16.1

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2841	0.5	1x 115	1-5	1x 12	42	7-9	1x 18

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2439	0.5	1x 120	1-5	1x 24	20	7-9	1x 35.5

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2215	0.5	1x 240	1-5	1x 12	42	7-9	1x 18
display	BV EI 301 2256	0.5	1x 240	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2787	0.5	1x 240	1-5	1x 10	50	7-9	1x 14.9

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2114	0.5	1x 380	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2539	0.5	1x 440	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2674	0.5	1x 380	1-5	1x 12	42	7-9	1x 18
display	BV EI 301 2732	0.5	1x 380	1-5	1x 10	50	7-9	1x 14.9

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 301 2114	0.5	1x 380	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2539	0.5	1x 440	1-5	1x 24	20	7-9	1x 35.5
display	BV EI 301 2674	0.5	1x 380	1-5	1x 12	42	7-9	1x 18
display	BV EI 301 2732	0.5	1x 380	1-5	1x 10	50	7-9	1x 14.9

back to sizes

EI 302 ...

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Size (h)	Weight	Packaging unit (pieces)
BV EI 302 .../ 10.5 mm	1.8 VA	1.5 VA	21.8 mm	0.,070 kg	50

Serial-Types EI 302 ...

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 302 2020	1.5	1x 230	1-5	1x 6	250	7-9	1x 8.2
display	BV EI 302 2021	1.5	1x 230	1-5	1x 9	166	7-9	1x 12.1
display	BV EI 302 2022	1.5	1x 230	1-5	1x 12	125	7-9	1x 16.6
display	BV EI 302 2023	1.5	1x 230	1-5	1x 15	100	7-9	1x 20.6
display	BV EI 302 2024	1.5	1x 230	1-5	1x 18	83	7-9	1x 24.5
display	BV EI 302 2025	1.5	1x 230	1-5	2x 6	125	6-7/9-10	2x 8.2
display	BV EI 302 2026	1.5	1x 230	1-5	2x 9	83	6-7/9-10	2x 12.4
display	BV EI 302 2027	1.5	1x 230	1-5	2x 12	62	6-7/9-10	2x 16.6
display	BV EI 302 2028	1.5	1x 230	1-5	2x 15	50	6-7/9-10	2x 20.4
display	BV EI 302 2029	1.5	1x 230	1-5	2x 18	41	6-7/9-10	2x 24.8
display	BV EI 302 2989	1.5	1x 230	1-5	1x 24	62	7-9	1x 33.5

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 302 2000	1.8	1x 230	1-5	1x 6	300	7-9	1x 8.8
display	BV EI 302 2001	1.8	1x 230	1-5	1x 9	200	7-9	1x 12.6
display	BV EI 302 2002	1.8	1x 230	1-5	1x 12	150	7-9	1x 16.9
display	BV EI 302 2003	1.8	1x 230	1-5	1x 15	120	7-9	1x 21.1
display	BV EI 302 2004	1.8	1x 230	1-5	1x 18	100	7-9	1x 25.4
display	BV EI 302 2005	1.8	1x 230	1-5	2x 6	150	6-7/9-10	2x 8.8
display	BV EI 302 2006	1.8	1x 230	1-5	2x 9	100	6-7/9-10	2x 13
display	BV EI 302 2007	1.8	1x 230	1-5	2x 12	75	6-7/9-10	2x 17.8
display	BV EI 302 2008	1.8	1x 230	1-5	2x 15	60	6-7/9-10	2x 21.8
display	BV EI 302 2009	1.8	1x 230	1-5	2x 18	50	6-7/9-10	2x 26.2
display	BV EI 302 2990	1.8	1x 230	1-5	1x 24	75	7-9	1x 34.5
display	BV EI 302 3021	1.8	1x 230	1-5	1x 7.5	240	7-9	1x 10.7
display	BV EI 302 3022	1.8	1x 230	1-5	1x 21	86	7-9	1x 30.4

[back to sizes](#)

EI 303 ...

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Size (h)	Weight	Packaging unit (pieces)
BV EI 303 .../ 12.5 mm	2.3 VA	1.9 VA	23,8 mm	0.081 kg	50

Serial-Types EI 303 ...

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 303 2030	1.9	1x 230	1-5	1x 6	316	7-9	1x 8.6
display	BV EI 303 2031	1.9	1x 230	1-5	1x 9	211	7-9	1x 12.9
display	BV EI 303 2032	1.9	1x 230	1-5	1x 12	158	7-9	1x 17.2
display	BV EI 303 2033	1.9	1x 230	1-5	1x 15	126	7-9	1x 21.5
display	BV EI 303 2034	1.9	1x 230	1-5	1x 18	105	7-9	1x 25.8
display	BV EI 303 2035	1.9	1x 230	1-5	2x 6	158	6-7/9-10	2x 8.8
display	BV EI 303 2036	1.9	1x 230	1-5	2x 9	105	6-7/9-10	2x 13.2
display	BV EI 303 2037	1.9	1x 230	1-5	2x 12	79	6-7/9-10	2x 17.7
display	BV EI 303 2038	1.9	1x 230	1-5	2x 15	63	6-7/9-10	1x 21.9
display	BV EI 303 2039	1.9	1x 230	1-5	2x 18	52	6-7/9-10	2x 26.5
display	BV EI 303 2095	1.9	1x 230	1-5	2x 7.5	126	6-7/9-10	2x 11.7
display	BV EI 303 2100	1.9	1x 230	1-5	1x 24	79	7-9	1x 35.5
display	BV EI 303 2782	1.9	1x 230	1-5	2x 10	95	6-7/9-10	2x 15
display	BV EI 303 3012	1.9	1x 230	1-5	1x 10	190	7-9	1x 14.5
display	BV EI 303 3013	1.9	1x 230	1-5	1x 21	90	7-9	1x 30

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 303 2010	2.3	1x 230	1-5	1x 6	383	7-9	1x 8.5
display	BV EI 303 2011	2.3	1x 230	1-5	1x 9	255	7-9	1x 12.9
display	BV EI 303 2012	2.3	1x 230	1-5	1x 12	191	7-9	1x 17.4
display	BV EI 303 2013	2.3	1x 230	1-5	1x 15	153	7-9	1x 21.6
display	BV EI 303 2014	2.3	1x 230	1-5	1x 18	127	7-9	1x 25.8
display	BV EI 303 2015	2.3	1x 230	1-5	2x 6	191	6-7/9-10	2x 9.4
display	BV EI 303 2016	2.3	1x 230	1-5	2x 9	127	6-7/9-10	2x 14.1
display	BV EI 303 2017	2.3	1x 230	1-5	2x 12	95	6-7/9-10	2x 18.8
display	BV EI 303 2018	2.3	1x 230	1-5	2x 15	76	6-7/9-10	2x 23.4
display	BV EI 303 2019	2.3	1x 230	1-5	2x 18	63	6-7/9-10	2x 28.1
display	BV EI 303 2991	2.3	1x 230	1-5	1x 24	96	7-9	1x 33.7

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 303 2669	1.9	1x 110	1-5	1x 12	158	7-9	1x 17.2
display	BV EI 303 2690	1.9	1x 115	1-5	2x 7.5	126	6-7/9-10	2x 11.7
display	BV EI 303 2693	1.9	1x 24	1-5	1x 18	105	7-9	1x 25.8
display	BV EI 303 2739	1.9	1x 127	1-5	1x 24	79	7-9	1x 35.5
display	BV EI 303 2744	1.9	1x 110	1-5	1x 24	79	7-9	1x 35.5
display	BV EI 303 2897	1.9	1x 115	1-5	1x 12	158	7-9	1x 17.2
display	BV EI 303 2943	1.9	1x 115	1-5	1x 9	211	7-9	1x 12.9
display	BV EI 303 2982	1.9	1x 110	1-5	1x 18	105	7-9	1x 25.8

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 303 2535	1.9	1x 400	1-5	2x 9	105	6-7/9-10	2x 13.2
display	BV EI 303 2684	1.9	1x 240	1-5	2x 15	63	6-7/9-10	1x 21.9

[back to sizes](#)

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Size (h)	Weight	Packaging unit (pieces)
BV EI 304 .../ 15.5 mm	2.6 VA	2.1 VA	27.4 mm	0.099 kg	50

Serial-Types EI 304 ...

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2080	2.1	1x 230	1-5	1x 6	350	7-9	1x 10.5
display	BV EI 304 2081	2.1	1x 230	1-5	1x 9	210	7-9	1x 15.8
display	BV EI 304 2082	2.1	1x 230	1-5	1x 12	175	7-9	1x 21.5
display	BV EI 304 2083	2.1	1x 230	1-5	1x 15	140	7-9	1x 26.5
display	BV EI 304 2084	2.1	1x 230	1-5	1x 18	117	7-9	1x 30
display	BV EI 304 2085	2.1	1x 230	1-5	2x 6	175	6-7/9-10	2x 11.2
display	BV EI 304 2086	2.1	1x 230	1-5	2x 9	117	6-7/9-10	2x 16
display	BV EI 304 2087	2.1	1x 230	1-5	2x 12	88	6-7/9-10	2x 21.5
display	BV EI 304 2088	2.1	1x 230	1-5	2x 15	70	6-7/9-10	2x 26.5
display	BV EI 304 2089	2.1	1x 230	1-5	2x 18	58	6-7/9-10	2x 29.8
display	BV EI 304 2751	2.1	1x 230	1-5	1x 10	210	7-9	1x 15.8
display	BV EI 304 2773	2.1	1x 230	1-5	2x 7.5	140	6-7/9-10	2x 13.9
display	BV EI 304 2843	2.1	1x 230	1-5	1x 21	100	7-9	1x 33.4
display	BV EI 304 2868	2.1	1x 230	1-5	1x 24	88	7-9	1x 37.3
display	BV EI 304 2889	2.1	1x 230	1-5	1x 7.5	280	7-9	1x 13.7
display	BV EI 304 3014	2.1	1x 230	1-5	2x 10	105	6-7/9-10	2x 16

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2040	2.6	1x 230	1-5	1x 6	434	7-9	1x 10.4
display	BV EI 304 2041	2.6	1x 230	1-5	1x 9	289	7-9	1x 15.9
display	BV EI 304 2042	2.6	1x 230	1-5	1x 12	217	7-9	1x 21.7
display	BV EI 304 2043	2.6	1x 230	1-5	1x 15	174	7-9	1x 27.4
display	BV EI 304 2044	2.6	1x 230	1-5	1x 18	145	7-9	1x 30.9
display	BV EI 304 2045	2.6	1x 230	1-5	2x 6	217	6-7/9-10	2x 10.4
display	BV EI 304 2046	2.6	1x 230	1-5	2x 9	145	6-7/9-10	2x 16.2
display	BV EI 304 2047	2.6	1x 230	1-5	2x 12	108	6-7/9-10	2x 22.4
display	BV EI 304 2048	2.6	1x 230	1-5	2x 15	87	6-7/9-10	2x 26.4
display	BV EI 304 2049	2.6	1x 230	1-5	2x 18	72	6-7/9-10	2x 30.4
display	BV EI 304 2840	2.6	1x 230	1-5	2x 7.5	173	6-7/9-10	2x 12.5
display	BV EI 304 2941	2.6	1x 230	1-5	1x 10	260	7-9	1x 14.3
display	BV EI 304 2992	2.6	1x 230	1-5	1x 24	108	7-9	1x 41.7
display	BV EI 304 2995	2.6	1x 230	1-5	1x 21	123	7-9	1x 32.1

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2366	2.1	1x 42	1-5	2x 12	88	6-7/9-10	2x 21.5
display	BV EI 304 2476	2.1	1x 24	1-5	2x 18	58	6-7/9-10	2x 29.8
display	BV EI 304 2498	2.1	1x 24	1-5	2x 15	70	6-7/9-10	2x 26.5
display	BV EI 304 2689	2.1	1x 42	1-5	1x 18	117	7-9	1x 30
display	BV EI 304 2712	2.1	1x 42	1-5	1x 24	88	7-9	1x 37.3
display	BV EI 304 2952	2.1	1x 24	1-5	1x 18	117	7-9	1x 30

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2281	2.1	1x 110	1-5	1x 10	210	7-9	1x 17.4
display	BV EI 304 2301	2.1	1x 115	1-5	1x 21	100	7-9	1x 33.4
display	BV EI 304 2362	2.1	1x 110	1-5	1x 12	175	7-9	1x 21.5
display	BV EI 304 2367	2.1	1x 110	1-5	2x 12	88	6-7/9-10	2x 21.5
display	BV EI 304 2423	2.1	1x 110	1-5	2x 15	70	6-7/9-10	2x 26.5
display	BV EI 304 2524	2.1	1x 110	1-5	1x 9	234	7-9	1x 16
display	BV EI 304 2718	2.1	1x 110	1-5	1x 18	117	7-9	1x 30
display	BV EI 304 2803	2.1	1x 115	1-5	1x 10	210	7-9	1x 17.4
display	BV EI 304 2818	2.1	1x 115	1-5	1x 15	140	7-9	1x 26.5
display	BV EI 304 2820	2.1	1x 110	1-5	1x 15	140	7-9	1x 26.5
display	BV EI 304 2825	2.1	1x 110	1-5	2x 18	58	6-7/9-10	2x 29.8

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2345	2.1	1x 240	1-5	1x 21	100	7-9	1x 33.4
display	BV EI 304 2424	2.1	1x 240	1-5	2x 15	70	6-7/9-10	2x 26.5
display	BV EI 304 2490	2.1	1x 240	1-5	1x 10	210	7-9	1x 15.8
display	BV EI 304 2556	2.1	1x 240	1-5	2x 18	58	6-7/9-10	2x 29.8

display	BV EI 304 2711	2.1	1x 400	1-5	2x 18	58	6-7/9-10	2x 29.8
display	BV EI 304 2735	2.1	1x 400	1-5	1x 21	100	7-9	1x 33.4
display	BV EI 304 2797	2.1	1x 240	1-5	1x 24	88	7-9	1x 37.3
display	BV EI 304 2862	2.1	1x 240	1-5	1x 18	117	7-9	1x 30
display	BV EI 304 2899	2.1	1x 240	1-5	1x 12	175	7-9	1x 21.5
display	BV EI 304 3015	2.1	1x 400	1-5	1x 12	175	7-9	1x 21.5

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2430	2.6	1x 110	1-5	1x 12	217	7-9	1x 21.7
display	BV EI 304 2790	2.6	1x 110	1-5	1x 9	289	7-9	1x 15.9
display	BV EI 304 2819	2.6	1x 110	1-5	1x 18	145	7-9	1x 30.9
display	BV EI 304 2835	2.6	1x 110	1-5	2x 6	217	6-7/9-10	2x 10.4
display	BV EI 304 2951	2.6	1x 24	1-5	1x 9	289	7-9	1x 15.9

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 304 2443	2.6	1x 400	1-5	1x 24	108	7-9	1x 41.7
display	BV EI 304 2798	2.6	1x 240	1-5	2x 7.5	173	6-7/9-10	2x 12.5

[zurück zu den Baugrößen](#)

EI 305...

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Size (h)	Weight	Packaging unit (pieces)
BV EI 305 .../ 18.0 mm	3.0 VA	2.3 VA	29.8 mm	0.111 kg	50

Serial-Types EI 305 ...

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2772	2.3	1x 230	1-5	1x 21	110	7-9	1x 38.4
display	BV EI 305 2800	2.3	1x 230	1-5	1x 12	192	7-9	1x 21.4
display	BV EI 305 2802	2.3	1x 230	1-5	1x 10	230	7-9	1x 18.6
display	BV EI 305 2805	2.3	1x 230	1-5	1x 15	153	7-9	1x 28.2
display	BV EI 305 2844	2.3	1x 230	1-5	2x 15	76	6-7/9-10	2x 24.1
display	BV EI 305 2847	2.3	1x 230	1-5	2x 12	96	6-7/9-10	2x 21.8
display	BV EI 305 2851	2.3	1x 230	1-5	1x 18	128	7-9	1x 32.4
display	BV EI 305 2866	2.3	1x 230	1-5	2x 9	127	6-7/9-10	1x 17.1
display	BV EI 305 2874	2.3	1x 230	1-5	1x 24	96	7-9	1x 43.5
---	BV EI 305 2878	2.3	1x 230	1-5	1x 6	383	7-9	1x 11.6
display	BV EI 305 2879	2.3	1x 230	1-5	1x 9	255	7-9	1x 17.6
display	BV EI 305 2882	2.3	1x 230	1-5	2x 6	192	6-7/9-10	2x 11.1
display	BV EI 305 2893	2.3	1x 230	1-5	1x 7.5	305	7-9	1x 15.2
display	BV EI 305 2894	2.3	1x 230	1-5	2x 7.5	153	6-7/9-10	2x 13.8
display	BV EI 305 2895	2.3	1x 230	1-5	2x 18	64	6-7/9-10	2x 32.3

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2050	3	1x 230	1-5	1x 6	500	7-9	1x 10.7
display	BV EI 305 2051	3	1x 230	1-5	1x 9	334	7-9	1x 17.3
display	BV EI 305 2052	3	1x 230	1-5	1x 12	250	7-9	1x 20.4
display	BV EI 305 2053	3	1x 230	1-5	1x 15	200	7-9	1x 26.7
display	BV EI 305 2054	3	1x 230	1-5	1x 18	167	7-9	1x 32.5
display	BV EI 305 2055	3	1x 230	1-5	2x 6	250	6-7/9-10	2x 10.7
display	BV EI 305 2056	3	1x 230	1-5	2x 9	167	6-7/9-10	2x 15.9
display	BV EI 305 2057	3	1x 230	1-5	2x 12	125	6-7/9-10	2x 20.9
display	BV EI 305 2058	3	1x 230	1-5	2x 15	100	6-7/9-10	2x 28
display	BV EI 305 2059	3	1x 230	1-5	2x 18	83	6-7/9-10	2x 30.7
display	BV EI 305 2188	3	1x 230	1-5	1x 21	143	7-9	1x 35.7
display	BV EI 305 2836	3	1x 230	1-5	1x 8	375	7-9	1x 15.4
display	BV EI 305 2922	3	1x 230	1-5	2x 7.5	200	6-7/9-10	2x 13.7
display	BV EI 305 2940	3	1x 230	1-5	1x 10	300	7-9	1x 16.9
display	BV EI 305 2993	3	1x 230	1-5	1x 24	125	7-9	1x 42

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2307	2.3	1x 24	1-5	1x 15	153	7-9	1x 28.2
display	BV EI 305 2310	2.3	1x 24	1-5	1x 24	96	7-9	1x 43.5
display	BV EI 305 2555	2.3	1x 42	1-5	1x 24	96	7-9	1x 43.5
display	BV EI 305 2736	2.3	1x 24	1-5	1x 12	192	7-9	1x 21.4

[back to sizes](#)

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
------------	-------------	----------	-------------------	-----------------------	---------------------	-----------------	----------------------	--

display	BV EI 305 2102	2.3	1x 115	1-5	1x 24	96	7-9	1x 43.5
display	BV EI 305 2308	2.3	1x 110	1-5	1x 15	153	7-9	1x 28.2
display	BV EI 305 2311	2.3	1x 110	1-5	1x 24	96	7-9	1x 43.5
display	BV EI 305 2471	2.3	1x 127	1-5	1x 18	128	7-9	1x 32.4
display	BV EI 305 2494	2.3	1x 110	1-5	2x 12	96	6-7/9-10	2x 21.8
display	BV EI 305 2544	2.3	1x 110	1-5	1x 9	255	7-9	1x 17.6
display	BV EI 305 2671	2.3	1x 110	1-5	1x 18	128	7-9	1x 32.4
display	BV EI 305 2682	2.3	1x 110	1-5	2x 7.5	153	6-7/9-10	2x 13.8
display	BV EI 305 2710	2.3	1x 110	1-5	1x 12	192	7-9	1x 21.4
display	BV EI 305 2738	2.3	1x 100	1-5	1x 15	153	7-9	1x 28.2
display	BV EI 305 2884	2.3	1x 110	1-5	1x 10	230	7-9	1x 18.6

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2100	2.3	1x 500	1-5	1x 18	128	7-9	1x 32.4
display	BV EI 305 2309	2.3	1x 240	1-5	1x 15	153	7-9	1x 28.2
display	BV EI 305 2312	2.3	1x 240	1-5	1x 24	96	7-9	1x 43.5
display	BV EI 305 2324	2.3	1x 240	1-5	1x 18	128	7-9	1x 32.4
display	BV EI 305 2672	2.3	1x 240	1-5	1x 12	192	7-9	1x 21.4
display	BV EI 305 2814	2.3	1x 380	1-5	1x 18	128	7-9	1x 32.4

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2280	3	1x 110	1-5	1x 15	200	7-9	1x 26.7
display	BV EI 305 2518	3	1x 110	1-5	1x 10	300	7-9	1x 16.9
display	BV EI 305 2527	3	1x 110	1-5	2x 15	100	6-7/9-10	2x 28
display	BV EI 305 2678	3	1x 110	1-5	2x 7.5	200	6-7/9-10	2x 13.7
display	BV EI 305 2715	3	1x 110	1-5	1x 6	500	7-9	1x 10.7
display	BV EI 305 2745	3	1x 110	1-5	1x 18	167	7-9	1x 32.5
display	BV EI 305 2749	3	1x 110	1-5	1x 8	375	7-9	1x 15.4
display	BV EI 305 2753	3	1x 24	1-5	1x 18	167	7-9	1x 32.5
display	BV EI 305 2961	3	1x 115	1-5	1x 9	334	7-9	1x 17.3
display	BV EI 305 2965	3	1x 110	1-5	1x 12	250	7-9	1x 20.4

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2554	3	1x 240	1-5	1x 12	250	7-9	1x 20.4
display	BV EI 305 2695	3	1x 240	1-5	1x 8	375	7-9	1x 15.4
display	BV EI 305 2752	3	1x 240	1-5	1x 15	200	7-9	1x 26.7
display	BV EI 305 2755	3	1x 240	1-5	1x 10	300	7-9	1x 16.9

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 305 2099	3	1x 400	1-5	2x 12	125	6-7/9-10	2x 20.9
display	BV EI 305 2663	3	1x 400	1-5	1x 12	250	7-9	1x 20.4
display	BV EI 305 2665	3	1x 400	1-5	1x 24	125	7-9	1x 42
display	BV EI 305 2743	3	1x 440	1-5	2x 12	125	6-7/9-10	2x 20.9

back to sizes

EI 306...

Frame size/Core height	Output ta 40°C/F	Output ta 70°C/F	Size (h)	Weight	Packaging unit (pieces)
BV EI 306 .../ 23.0 mm	3,2 VA	3.0 VA	34.0 mm	0.135 kg	50

Serial-Types EI 306 ...

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 306 2023	2.6	1x 230	1-5	1x 24	108	7-9	1x 46.8
display	BV EI 306 2060	2.6	1x 230	1-5	1x 6	434	7-9	1x 11.7
display	BV EI 306 2061	2.6	1x 230	1-5	1x 9	289	7-9	1x 17.1
display	BV EI 306 2062	2.6	1x 230	1-5	1x 12	217	7-9	1x 22.9
display	BV EI 306 2063	2.6	1x 230	1-5	1x 15	173	7-9	1x 26.5
display	BV EI 306 2064	2.6	1x 230	1-5	1x 18	144	7-9	1x 34.8
display	BV EI 306 2065	2.6	1x 230	1-5	2x 6	217	6-7/9-10	2x 11.9
display	BV EI 306 2066	2.6	1x 230	1-5	2x 9	145	6-7/9-10	2x 17.7
display	BV EI 306 2067	2.6	1x 230	1-5	2x 12	108	6-7/9-10	2x 23.4
display	BV EI 306 2068	2.6	1x 230	1-5	2x 15	87	6-7/9-10	1x 26.9
display	BV EI 306 2069	2.6	1x 230	1-5	2x 18	72	6-7/9-10	2x 31
display	BV EI 306 2103	2.6	1x 230	1-5	1x 7.5	346	7-9	1x 13.9
display	BV EI 306 3001	2.6	1x 230	1-5	2x 7.5	173	6-7/9-10	2x 14.4
display	BV EI 306 3024	2.6	1x 230	1-5	1x 21	123	7-9	1x 37

back to sizes

data sheet	article no.	power VA	primary voltage V	connecting pins prim.	secondary voltage V	current sec. mA	connecting pins sek.	
display	BV EI 306 2070	3.2	1x 230	1-5	1x 6	534	7-9	1x 10.9
display	BV EI 306 2071	3.2	1x 230	1-5	1x 9	356	7-9	1x 16.3
display	BV EI 306 2072	3.2	1x 230	1-5	1x 12	267	7-9	1x 22.6
display	BV EI 306 2073	3.2	1x 230	1-5	1x 15	213	7-9	1x 26.7
display	BV EI 306 2074	3.2	1x 230	1-5	1x 18	178	7-9	1x 31.7
display	BV EI 306 2075	3.2	1x 230	1-5	2x 6	265	6-7/9-10	2x 11.5
display	BV EI 306 2076	3.2	1x 230	1-5	2x 9	178	6-7/9-10	2x 17.2
display	BV EI 306 2077	3.2	1x 230	1-5	2x 12	133	6-7/9-10	2x 22.6
display	BV EI 306 2078	3.2	1x 230	1-5	2x 15	107	6-7/9-10	2x 25
display	BV EI 306 2079	3.2	1x 230	1-5	2x 18	89	6-7/9-10	2x 30.4
display	BV EI 306 2994	3.2	1x 230	1-5	1x 24	133	7-9	1x 44.5
display	BV EI 306 3025	3.2	1x 230	1-5	1x 7.5	427	7-9	1x 14
display	BV EI 306 3026	3.2	1x 230	1-5	1x 21	152	7-9	1x 40.5

[back to sizes](#)

We also supply other dimensions and performance data.
Ask us, we shall be glad to meet your special requirements!



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Transformers Audio & Signal](#) category:

Click to view products by [Hahn](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PL2615NL](#) [H1302FNLT](#) [H5012FNL](#) [H5077NLT](#) [H5084FNLT](#) [E4001NLT](#) [BX1194WNL](#) [HX2260FNL](#)
[HX5014FNL](#) [PA1136NL](#) [PA2437NL](#) [EX2024FNL](#) [T1049NL](#) [PE-65848FNLT](#) [PE-68023NL](#) [PH0905NL](#) [H1174FNL](#) [H1302FNL](#)
[H5015FNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [BX1194WNLT](#) [HX5019FNL](#) [HX5084NL](#)
[TX1263NLT](#) [4-1879391-0](#) [PA0173NLT](#) [PA1284NLT](#) [T1142NL](#) [T60403-Y4021-X115](#) [HX6101FNL](#) [HX1148NL](#) [HX5020FNLT](#)
[HX5014FNLT](#) [T1124NL](#) [1879732-1](#) [B8846NL](#) [TX1267NLT](#) [TX1341NL](#) [H0013FNL](#) [H1270FNLT](#) [H2009FNL](#) [H5008FNLT](#) [H7008FNLT](#)
[H5004NLT](#)