Dual Port 10/100 PoE Transformer

Dual Port 10/100BASE-TX PoE and PoE+ Isolation Modules









Product Features:

- Dual 10/100 PoE/PoE+ Transformer/Choke
- IEEE802.3au/af/at Compliant
- UL/EN60950 Recognized
- 100% Electrical Testing
- 1500Vrms Hi-Pot
- Patented Open Frame Construction

Part Number	Circuit	Temp. t Package Range PoE			Return Loss (min) 1-40MHz 60MHz 80MHz			100MHz	RoHS ¹
TG111-S112NYLF	A	NY	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG111-S112NYRL	Α	NY	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	RoHS (7a)
TG111-E112NYLF	Α	NY	-40 to +85°C	PoE	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG111-E112NYRL	А	NY	-40 to +85°C	PoE	-18dB	-14dB	-12dB	-10dB	RoHS (7a)
TG1G-S012NZLF	Α	NZ	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG1G-S012NZRL	А	NZ	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	RoHS (7a)
TG1G-E012NZLF	Α	NZ	-40 to +85°C	PoE	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG1G-E012NZRL	А	NZ	-40 to +85°C	PoE	-18dB	-14dB	-12dB	-10dB	RoHS (7a)
TG111-HP3NZLF ²	Α	NZ	0 to 70°C	PoE+	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG111-HP3NZRL ²	А	NZ	0 to 70°C	PoE+	-18dB	-14dB	-12dB	-10dB	RoHS (7a)
TG111-HPE3NZLF ²	Α	NZ	-40 to +85°C	PoE+	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG111-HPE3NZRL ²	А	NZ	-40 to +85°C	PoE+	-18dB	-14dB	-12dB	-10dB	RoHS (7a)
TG110-RP06NJLF	В	NJ	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	Pb-Free
TG110-RP06NJRL	В	NJ	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	RoHS (7a)

Notes:


1. Pb-Free parts are RoHS 6/6 compliant. RoHS (7a) parts contain lead per exemption 7a which is set to expire in July 2016.


2. Pins 13 - 24 must be located on the line side for PoE+ applications.

3. For the smallest dual port 10/100BASE-TX PoE/PoE+ transformer contact the factory about the proprietary GEmini™ series.

4. Please contact the factory or representative for individual datasheets or additional information.

Circuit A







For additional information contact your local representative, or HALO's support staff at (650) 903-3800 or info@haloelectronics.com

HALO Dual Port 10/100 Family of Ethernet Transformers


NZ Package







Dimensions: inch [mm] Co-Planarity: 0.004 [0.10]



 $\begin{array}{c|c} - & & - & 0.039 \\ \hline 0.010 & typ \\ \hline 0.250 \\ \hline 1 \\ \hline 0.251 \\ \hline 1 \\ \hline 0.412 \\ \hline 0.250 \\ \hline$


0.030 typ [0.76]

0


0.540 max [13.72]

RARAAAAAAAA

0.600 max [15.24]



Dimensions: inch [mm]

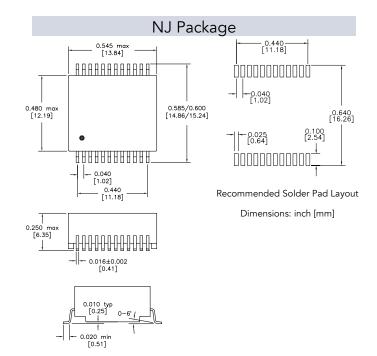

US Patent Numbers: 5,656,985 6,297,721 B1 6,297,720 B1 6,320,489 B1 6,344,785 B1 6,662.431 B1



HALO[®] Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC isolation modules, and integrated Ethernet connectors. HALO's high quality and competitively priced leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by HALO manufacturer:

Other Similar products are found below :

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5079NLT H5084FNLT B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE-65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT-00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 3-1879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL 1879732-1