Gigabit PoE Transformer

SMD Single Port Gig or Dual Port 10/100BASE-TX PoE/PoE+ Isolation Modules

















Product Features:

- GigE Ethernet PoE/PoE+ Transformer/Choke
- IEEE802.3ab/af/at Compliant
- UL/EN60950 Recognized
- 100% Electrical Testing
- 1500Vrms Hi-Pot
- Patented Open Frame Construction

| Part Number | Circuit | Package | Temp. Range | PoE | 1-40MHz | Return L 60MHz | oss (min) 80MHz | 100MHz | Insertion Loss (max) | RoHS¹ |
|-----------------|---------|---------|----------------|------|---------|-------------------|--------------------|--------|-------------------------|-----------|
| TG111-S112NYLF | A | NY | 0 to 70°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | Pb-Free |
| TG111-S112NYRL | А | NY | 0 to 70°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | RoHS (7a) |
| TG111-E112NYLF | Α | NY | -40 to +85°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | Pb-Free |
| TG111-E112NYRL | А | NY | -40 to +85°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | RoHS (7a) |
| TG1G-S012NZLF | Α | NZ | 0 to 70°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | Pb-Free |
| TG1G-S012NZRL | Α | NZ | 0 to 70°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | RoHS (7a) |
| TG1G-E012NZLF | Α | NZ | -40 to +85°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | Pb-Free |
| TG1G-E012NZRL | Α | NZ | -40 to +85°C | PoE | -18dB | -14dB | -12dB | -10dB | -1.1dB | RoHS (7a) |
| TG111-HP3NZLF* | Α | NZ | 0 to 70°C | PoE+ | -18dB | -14dB | -12dB | -10dB | -1.1dB | Pb-Free |
| TG111-HP3NZRL* | Α | NZ | 0 to 70°C | PoE+ | -18dB | -14dB | -12dB | -10dB | -1.1dB | RoHS (7a) |
| TG111-HPE3NZLF* | Α | NZ | -40 to +85°C | PoE+ | -18dB | -14dB | -12dB | -10dB | -1.1dB | Pb-Free |
| TG111-HPE3NZRL* | А | NZ | -40 to +85°C | PoE+ | -18dB | -14dB | -12dB | -10dB | -1.1dB | RoHS (7a) |

^{*} Pins 13 - 24 must be located on the line side for PoE+

Circuit A


Notes:


- 1. Pb-Free parts are RoHS 6/6 compliant. RoHS (7a) parts contain lead per exemption 7a which is set to expire in July 2016.
- 2. Parts with RL suffix are not recommended for new designs.
- 3. Please contact the factory or representative for individual datasheets or additional information.
- 4. For the smallest single port Gigabit or dual port 10/100BASE-TX PoE/PoE+ transformer contact the factory about the proprietary *GEmini™ series*.

HALO Gigabit Family of Ethernet Transformers

NZ Package

NY Package

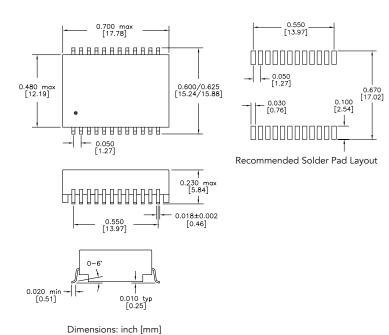

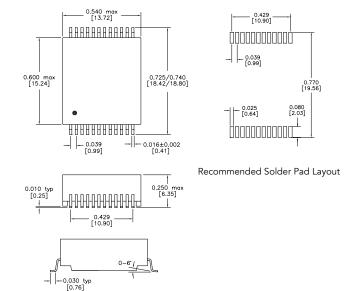

Dimensions: inch [mm]

US Patent Numbers: 5,656,985 6,297,721 B1 6,297,720 B1 6,320,489 B1 6,344,785 B1 6,662.431 B1



Co-Planarity: 0.004 [0.10]

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC isolation modules, and integrated Ethernet connectors. HALO's high quality and competitively priced leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by HALO manufacturer:

Other Similar products are found below:

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5079NLT H5084FNLT

B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 31879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL
1879732-1