3kVrms DC/DC Converter

6 pin "Lead Free" Isolation Modules













Product Features:

- Provides the isolation and voltage outputs required for low cost DC/DC converter circuits.
- Designed specifically for use with the MaximTM MAX253, MAX845, and MAX3535 drivers.
- Isolation voltage is 3,000Vrms and working voltage up to 300V. Other packages are available with isolation voltages ranging from 500V to 5KVrms.
- UL60950, EN60950 and DEMKO recognized
- Temperature Range: -40 to +85°C

| Part Number | Turns Ratio ±3% PRI : SEC | OCL (µH Typical) | PRI DCR (Ω Max) | PRI ET Constant (V-µs Min.) |
|--------------|------------------------------|---------------------|--------------------|--------------------------------|
| TGMR-310V6LF | 1CT:0.5CT | 500 | 0.8 | 18 |
| TGMR-320V6LF | 1CT:0.375CT | 500 | 0.8 | 18 |
| TGMR-330V6LF | 1CT:0.75CT | 500 | 0.8 | 18 |
| TGMR-340V6LF | 1CT:1.33CT | 800 | 0.9 | 22 |
| TGMR-350V6LF | 1CT:1CT | 800 | 0.9 | 22 |
| TGMR-355V6LF | 1CT:1.5CT | 800 | 0.9 | 22 |
| TGMR-360V6LF | 1CT:2CT | 800 | 0.9 | 22 |
| TGMR-370V6LF | 1CT:1.6CT | 800 | 0.9 | 22 |
| TGMR-380V6LF | 1CT:2.66CT | 800 | 0.9 | 22 |


Notes:

Primary Pins are 1-3.

For more information, pertaining to the Maxim drivers please contact Maxim at (408) 737-7600.


Maxim is a registered trademark of Maxim Integrated Products.


Schematic



6 Pin, 3kVrms "Lead Free" DC/DC Converter Isolation Module

V6 Package

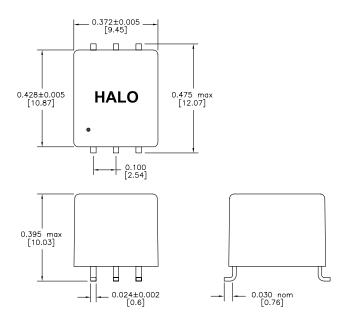



Recommended Solder Pad Dimensions

Dimensions: inches [mm] Co-Planarity: 0.004 [0.10]



HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

3kVrms DC/DC Converter

6 pin SMD RoHS Compliant Isolation Modules













Product Features:

- Provides the isolation and voltage outputs required for low cost DC/DC converter circuits.
- Designed specifically for use with the Maxim™ MAX253, MAX845, and MAX3535 drivers.
- Isolation voltage is 3,000Vrms. Other packages are available with isolation voltages ranging from 500Vrms to 5KVrms.
- UL60950, EN60950 recognized
- Temperature Range: -40 to +85°C

| SMD Part Number | Turns Ratio ±3% PRI : SEC | PRI OCL (µH Typical) | PRI DCR (Ω Max.) | PRI ET Constant (V-µs Min.) |
|--------------------|------------------------------|-------------------------|---------------------|--------------------------------|
| TGM-310NARL | 1CT:0.5CT | 570 | 0.8 | 11 |
| TGM-320NARL | 1CT:0.375CT | 570 | 0.8 | 11 |
| TGM-330NARL | 1CT:0.75CT | 570 | 0.8 | 11 |
| TGM-340NARL | 1CT:1.33CT | 400 | 0.8 | 11 |
| TGM-350NARL | 1CT:1CT | 400 | 0.8 | 11 |
| TGM-360NARL | 1CT:2CT | 400 | 0.8 | 11 |
| TGM-380NARL | 1CT:2.66CT | 400 | 0.5 | 11 |

Notes:

Primary Pins are 1-3.


For more information, pertaining to the Maxim drivers please contact Maxim at (408) 737-7600.

Maxim is a registered trademark of Maxim Integrated Products.

Schematic 3 2

6 Pin, 3kVrms RoHS Compliant DC/DC Converter Isolation Module

TGM-NA SMD Package

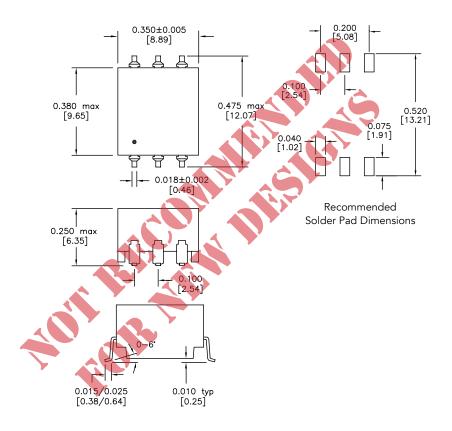

Dimensions: inches [mm] Co-Planarity: 0.004 [0.10]

US Patent Numbers for SMD Devices 5,656,985 6,297,721 B1 6,297,720 B1 6,320,489 B1 6,344,785 B1 6,662,431 B1



(650) 903-3800 www.haloelectronics.com HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pulse Transformers category:

Click to view products by HALO manufacturer:

Other Similar products are found below:

E4001NLT 1879401-1 IF-18-0269-N T1042NLT T1049NL PE-68023NL PH0905NL PT4163S PT5010 PA0173NLT CTX02-14608 PE-65457NLT T60403-D4721-X088 H1183NLT CTX33-18971-R HM2108NLT HM0068ANLT PG1427.001NLT 750031353

PH9400.566NLT PH9400.655ANLT PH9400.655NLT PH9385.013NLT B78307X0001 B78307A2276A003 HX6096FNL HX6106NLT

P0926NL HX6096NL PA3493NLT P0585ANL HU4102NL PH9385.012NLT PH9400.111NLT PH9400.211NLT PH9400.233ANLT

SMQC1553-6 78615/9JC-R SMQ1553-45 Q1553-45 Q1553-22 Q1553-21 PH9400.211ANLT TGM-050P3RL TGMS-1464V6LF TGRAD-560V8LF TGMR-360V6LF P0544 PA0264NLT T60403-D4215-X014