

Quality Products. Service Excellence.

500mw Audio Miniature Epoxy Potted 108 Series

PC Board Mount






- Perfect for audio input, line matching, isolation or output transformer applications.
- 500 milliwatt (+/- 1.5 db, 300 Hz. 50 KHz.).
- Epoxy potted in an attractive black molded case, Pin type P.C. board mount (min. 0.187" length).
- In some models where no center tap is required (on secondary), pin No. 5 is omitted.
- Power level ratings are maximum at lowest frequency rating (see charts & PDF spec. sheets below)
- Power can be increased slightly at higher frequencies. See individual PDF specs. for specifics.
- Will withstand soldering for 10 sec. @ 260 degrees C, ambient temp. 85 degrees C max.







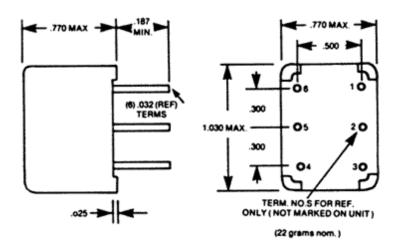

	Nominal Impedance (Ohms)		D.C. Resistance (Ohms) +/- 20%		Max. D.C.	
	Primary	Secondary	Primary	Secondary	Unbalance	
Part No.	(Pins 1-3)	(Pins 4-6)	(Pins 1-3)	(Pins 4-6)	(ma.)	
108E	600 ct	3.2	65	0.43	6	
108F	600 ct	150 ct	65	18	6	
108G	600 ct	250 ct	65	29	6	
108H	600 ct	600 ct	65	69	6	
108J	1K ct	600 ct	109	69	4.5	
108K	1.5K ct	600 ct	170	69	4	
108L	10K ct	3.2	1050	0.43	1.5	
108N	10K ct	600 ct	1050	69	1.5	
108P	10K ct	1.5K ct	1050	180	1.5	
108T	10K ct	10K ct	1050	1200	1.5	

Data subject to change without notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by Hammond manufacturer:

Other Similar products are found below:

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5084FNLT

B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 31879385-5 TX1263NLT 4-1879391-0 P2004NLT T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT
T1124NL 1879732-1