




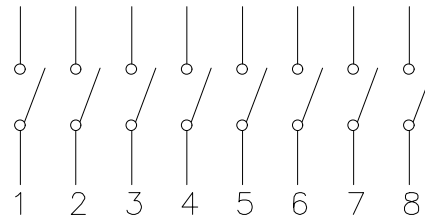

| | |
|---------|-----------------------|
| 5 | 6 |
| REV. | ECN NO OR DESCRIPTION |
| REVISED | DATE |
| | |

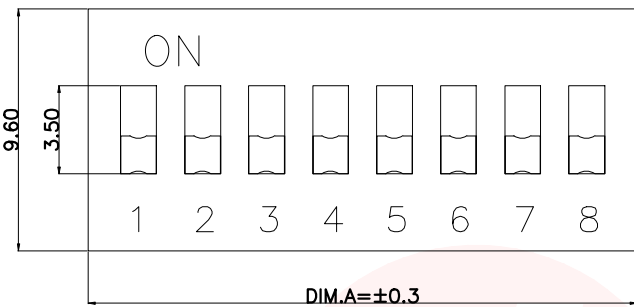

Circuit Diagram

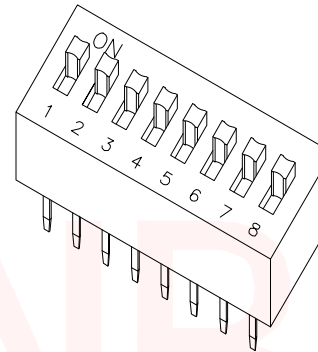

NOTES:

1.MECHANICAL:



- 1>.Operation force: 1000gf Max.
- 2>.Operation Temperature: -30°C to +85°C.
- 3>.Storage Temperature: -40°C to +85°C.
- 4>.Mechanical Life: 3000 cycles operations.
- 5>.Resistance to Soldering: 260±5°C for 3-5 Seconds.
- 6>.Please keep switch in "OFF" when welding.

2.MATERIAL:


- 1>.Base: UL94V-0 PBT Thermoplastic / Color:Black.
- 2>.COVER: UL94V-0 PBT Thermoplastic / Color:Red, Black, Blue.
- 3>.ACTUATOR: UL94V-0 PBT High Thermoplastic / Color: White.
- 4>.TERMINAL: Copper alloy with gold plating for 1.5u".

3.ELECTRICAL:


- 1>.Non-switching Rating:100mA at 50VDC.
- 2>.Switching Rating: 25mA at 24VDC.
- 3>.Contact Resistance: Inital 50mΩ Max. Contact Resistance: After life 100mΩ Max.
- 4>.Insulation Resistance:100MΩ Min at 500VDC.
- 5>.Dielectric Strength: 500VAC for 60seconds.
- 6>.Switch Capacitance: 5PF Max at 1MHZ.

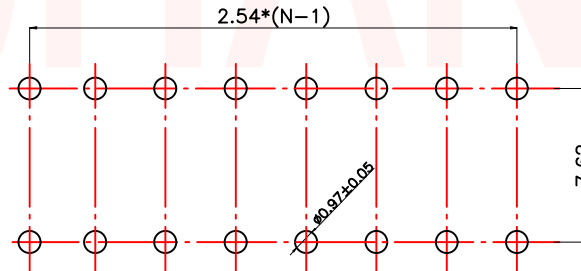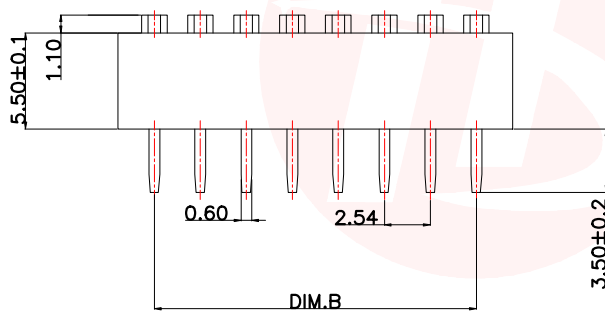

[P.C.B.LAYOUT]

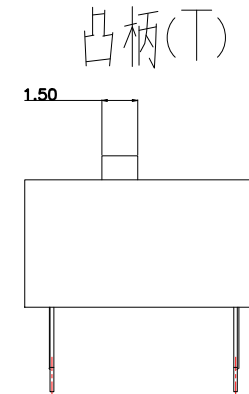

凸柄(T)

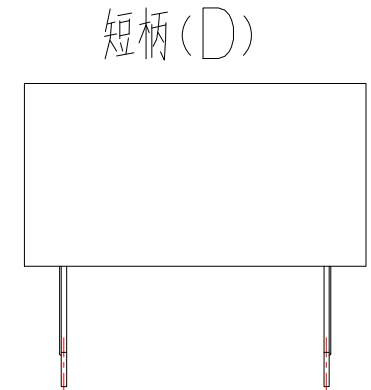

短柄(D)

| PIN位 | 2PIN | 3PIN | 4PIN | 5PIN | 6PIN | 7PIN | 8PIN | 9PIN | 10PIN |
|----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| DIM.A (长度) | 6.64 | 9.18 | 11.72 | 14.26 | 16.80 | 19.34 | 21.88 | 24.42 | 26.96 |
| DIM.B (长度) | 2.54 | 5.08 | 7.62 | 10.16 | 12.70 | 15.24 | 17.78 | 20.32 | 22.86 |
| PART NO. 凸柄(T) | DR-02LT | DR-03LT | DR-04LT | DR-05LT | DR-06LT | DR-07LT | DR-08LT | DR-09LT | DR-10LT |
| 盖子/蓝色(L) 短柄(D) | DR-02LD | DR-03LD | DR-04LD | DR-05LD | DR-06LD | DR-07LD | DR-08LD | DR-09LD | DR-10LD |
| PART NO. 凸柄(T) | DR-02HT | DR-03HT | DR-04HT | DR-05HT | DR-06HT | DR-07HT | DR-08HT | DR-09HT | DR-10HT |
| 盖子/红色(H) 短柄(D) | DR-02HD | DR-03HD | DR-04HD | DR-05HD | DR-06HD | DR-07HD | DR-08HD | DR-09HD | DR-10HD |
| PART NO. 凸柄(T) | DR-02KT | DR-03KT | DR-04KT | DR-05KT | DR-06KT | DR-07KT | DR-08KT | DR-09KT | DR-10KT |
| 盖子/黑色(K) 短柄(D) | DR-02KD | DR-03KD | DR-04KD | DR-05KD | DR-06KD | DR-07KD | DR-08KD | DR-09KD | DR-10KD |

| | | | | | |
|---------------------------------------|----------|---|-------|------------------|-------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD | | | |
| DECIMALS: | ANGLES: | TITLE BY DSPV DIP SERIES PITCH 2.54mm | | | |
| X :±0.30 | X :±2° | DWN | xiong | PART NO. DR-XXXX | |
| X.X :±0.20 | X.X :±1° | CHKD | lee | SCALE:1:1 | UNIT: mm |
| X.XX :±0.10 | | APVD | wang | SIZE: A4 | SHEET:10F 1 |
| CUSTOMER COPY | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Hanbo Electronic](#) manufacturer:

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [DRS4016](#) [1825444-1](#) [193005MS](#) [195010MS](#) [200183](#) [206002](#) [208004](#) [208007ST](#) [208008](#)
[25.350.0653.0](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE12S04](#) [206005RAS](#) [209005LPST](#) [2-1825058-8](#) [219002LPST](#)
[219002MSTJRF](#) [219012MST](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [LA2-002-DC24](#) [DSR02T](#) [193004MS](#) [E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-](#)
[9MSTP](#) [219008LPSTR](#) [EPM02FV](#) [206010RAST](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#) [1825428-4](#) [219-10LPSTF](#)
[E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [HARW0002](#) [EPG301BT06](#) [1-1825058-6](#) [E3TSL23M5J03M](#) [Y5795](#) [7R0060](#) [HARW0001](#)