



Recommended  
 P.C. Board Hole Layout

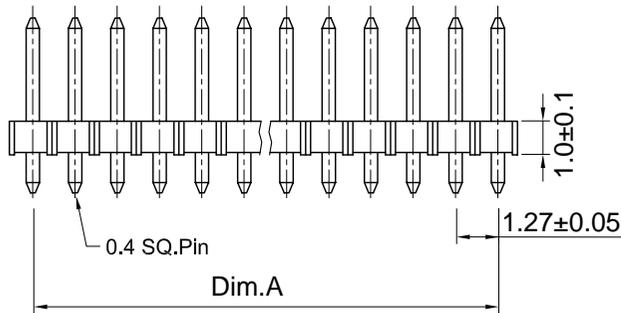

Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 300V
- Operating Temperature : -40° C ~ +105° C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option
- Standard: Full Gold Flash

|    |       |       |
|----|-------|-------|
| 3  | 2.54  | 3.81  |
| 4  | 3.81  | 5.08  |
| 5  | 5.08  | 6.35  |
| 6  | 6.35  | 7.62  |
| 7  | 7.62  | 8.89  |
| 8  | 8.89  | 10.16 |
| 9  | 10.16 | 11.43 |
| 10 | 11.43 | 12.70 |
| 11 | 12.70 | 13.97 |
| 12 | 13.97 | 15.24 |
| 13 | 15.24 | 16.51 |
| 14 | 16.51 | 17.78 |
| 15 | 17.78 | 19.05 |
| 16 | 19.05 | 20.32 |
| 17 | 20.32 | 21.59 |
| 18 | 21.59 | 22.86 |
| 19 | 22.86 | 24.13 |
| 20 | 24.13 | 25.40 |
| 21 | 25.40 | 26.67 |
| 22 | 26.67 | 27.94 |
| 23 | 27.94 | 29.21 |
| 24 | 29.21 | 30.48 |
| 25 | 30.48 | 31.75 |
| 26 | 31.75 | 33.02 |
| 27 | 33.02 | 34.29 |
| 28 | 34.29 | 35.56 |
| 29 | 35.56 | 36.83 |
| 30 | 36.83 | 38.10 |
| 31 | 38.10 | 39.37 |
| 32 | 39.37 | 40.64 |
| 33 | 40.64 | 41.91 |
| 34 | 41.91 | 43.18 |
| 35 | 43.18 | 44.45 |
| 36 | 44.45 | 45.72 |
| 37 | 45.72 | 46.99 |
| 38 | 46.99 | 48.26 |
| 39 | 48.26 | 49.53 |
| 40 | 49.53 | 50.80 |
| 41 | 50.80 | 52.07 |
| 42 | 52.07 | 53.34 |
| 43 | 53.34 | 54.61 |
| 44 | 54.61 | 55.88 |
| 45 | 55.88 | 57.15 |
| 46 | 57.15 | 58.42 |
| 47 | 58.42 | 59.69 |
| 48 | 59.69 | 60.96 |
| 49 | 60.96 | 62.23 |
| 50 | 62.23 | 63.50 |

|          |         |              |                |                        |  |             |
|----------|---------|--------------|----------------|------------------------|--|-------------|
|          |         | new          |                | 2015/5/3               | A                                      | <b>瀚源</b>   |
| ECN BO.  |         | DESCRIPTION. |                | DATE.                  | REV.                                   |             |
| DESIGNED | CHECKED | APPROVAL     | DRAWING NUMBER | SCALT: 1/2             |  | SCALE: 3:1  |
| Mikey    | Tom     | Jerry        | PART NAME      | 1271WV-XXP             | UNLESS OTHERWISE SPECIFIED, TOLERANCE: | X. ±0.25    |
|          |         |              | MODEL NAME     | 1271WV-XXP             |  | X.x ±0.20   |
|          |         |              | 3RD ANGLE PROJ | HanElectricity Co.,LTD |  | X.xx ±0.15  |
|          |         |              |                |                        |  | ANGULAR ±3' |
|          |         |              |                |                        |  | FILE. NO.   |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HanElectricity](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)