



Recommended
P.C. Board Hole Layout

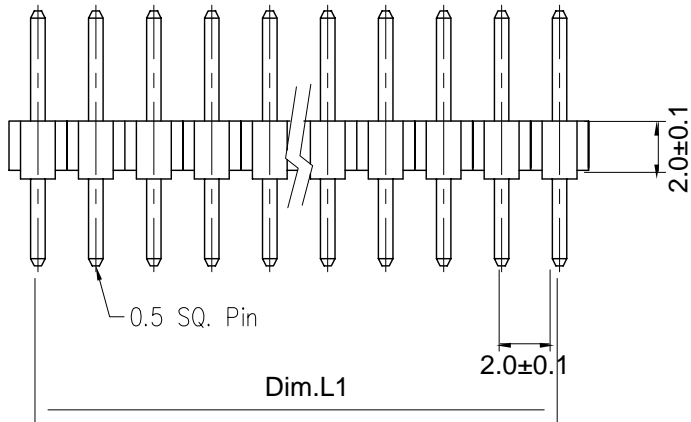

Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0-PA6T
- Contact Plated : See Option / Standard: Full Gold Flash

| Cir- cuits | Dimension (mm) | |
|---------------|----------------|-------|
| | L1 | L2 |
| 1x02 | 2.00 | 4.00 |
| 1x03 | 4.00 | 6.00 |
| 1x04 | 6.00 | 8.00 |
| 1x05 | 8.00 | 10.00 |
| 1x06 | 10.00 | 12.00 |
| 1x07 | 12.00 | 14.00 |
| 1x08 | 14.00 | 16.00 |
| 1x09 | 16.00 | 18.00 |
| 1x10 | 18.00 | 20.00 |
| 1x11 | 20.00 | 22.00 |
| 1x12 | 22.00 | 24.00 |
| 1x13 | 24.00 | 26.00 |
| 1x14 | 26.00 | 28.00 |
| 1x15 | 28.00 | 30.00 |
| 1x16 | 30.00 | 32.00 |
| 1x17 | 32.00 | 34.00 |
| 1x18 | 34.00 | 36.00 |
| 1x19 | 36.00 | 38.00 |
| 1x20 | 38.00 | 40.00 |
| 1x21 | 40.00 | 42.00 |
| 1x22 | 42.00 | 44.00 |
| 1x23 | 44.00 | 46.00 |
| 1x24 | 46.00 | 48.00 |
| 1x25 | 48.00 | 50.00 |
| 1x26 | 50.00 | 52.00 |
| 1x27 | 52.00 | 54.00 |
| 1x28 | 54.00 | 56.00 |
| 1x29 | 56.00 | 58.00 |
| 1x30 | 58.00 | 60.00 |
| 1x31 | 60.00 | 62.00 |
| 1x32 | 62.00 | 64.00 |
| 1x33 | 64.00 | 66.00 |
| 1x34 | 66.00 | 68.00 |
| 1x35 | 68.00 | 70.00 |
| 1x36 | 70.00 | 72.00 |
| 1x37 | 72.00 | 74.00 |
| 1x38 | 74.00 | 76.00 |
| 1x39 | 76.00 | 78.00 |
| 1x40 | 78.00 | 80.00 |

| | | | | | | | | | |
|----------|---------|--------------|----------------|------------------------|---|------------|---------|------------|--|
| — | | new | | 2015/5/3 | | A | | 瀚源 | |
| ECN BO. | | DESCRIPTION. | | DATE. | | REV. | | | |
| DESIGNED | CHECKED | APPROVAL | DRAWING NUMBER | | | SCALT: 1/2 | | SCALE: 3:1 | |
| Mikey | Tom | Jerry | PART NAME | 2005WV-XXP | UNLESS OTHERWISE SPECIFIED, TOLERANCE: | X. | ±0.25 | | |
| | | | MODEL NAME | 2005WV-XXP | | X.x | ±0.20 | | |
| | | | 3RD ANGLE PROJ | HanElectricity Co.,LTD | | X.xx | ±0.15 | | |
| | | | | | | | ANGULAR | ±3' | |
| | | | | | | | | FILE. NO. | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HanElectricity](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)