



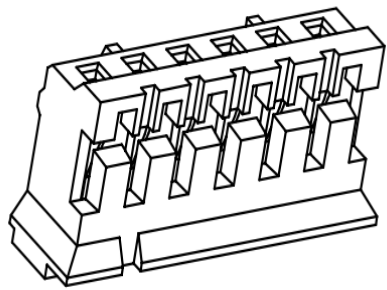
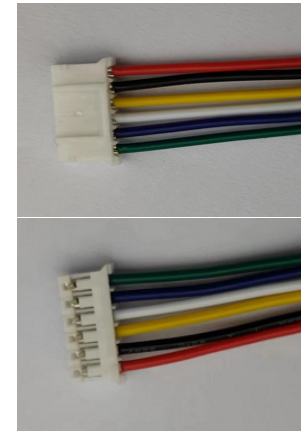



HX 2.0-6P DT 200mm 26AWG

2.0 mm×6P插头, UL1007, 80 ,26AWG, 线长200mm (1端插头, 另一端剥皮镀锡2mm)

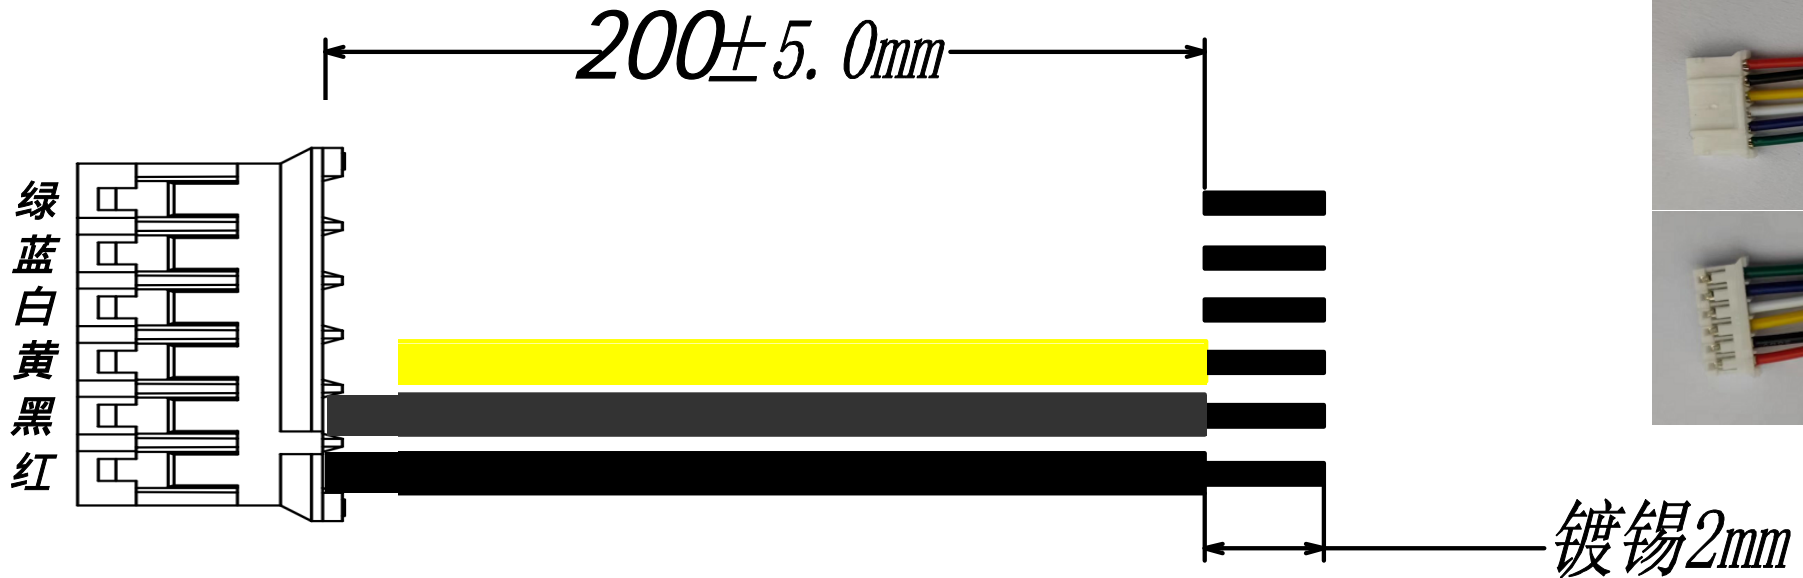

- 1. 极数 poles: 2 to 20P
- 2. 额定电流 Current rating: 2.0A AC, DC
- 3. 额定电压 Voltage rating: 100V AC, DC
- 4. 温度范围 Temperature range: -25. C to +85. C
- 5. 接触电阻 Contact resistance: ≤10mΩ
- 6. 绝缘电阻 Insulation resistance: ≥1000mΩ
- 7. 耐电压 Withstand voltage: 800V AC/minute
- 8. 适用线规 Applicable Wire: AWG #26
- 9. 适用基板厚度 Applicable PC board thickness: 1.6mm

 深圳市韩下电子有限公司	
日期: 2020-0-15	元件名称: HX 2.0-6P DT 200mm 26AWG
规格: 李耀凤	
审核: 钟华华	
批准: 罗家鑫	
尺寸单位: mm	
第 1 页 共 1 页	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [hanxia](#) manufacturer:

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1200700174](#) [1200860368](#) [E16A06002M030](#) [E200102-009-S1](#) [AX105346-EW](#) [MT14-187L](#)
[MWDM2L-51GS-6J1-2.82B](#) [ERWPAB3002M005](#) [190-038045-01](#) [NK5EPC1GRY](#) [NK5EPC4Y](#) [1969343-6](#) [ICD056GVP163D-C0](#)
[C5UMB3FBG](#) [C631208025](#) [C631208035](#) [C6F1106015](#) [2142758-2](#) [2168427-2](#) [21949-1](#) [2J1866A](#) [RJF SFTP 5E 0500](#) [AX100351](#)
[UTPCH14GY](#) [45-5684](#) [100345-1301](#) [MWDM2L-25P-8K1-.500B](#) [MWDM6L-31S-6C4-.375H](#) [73-7793-1](#) [74764-1101](#) [WHU18-3636-048](#)
[RJF2SA2G05100BTX](#) [1R4000A39M030](#) [UTPSP6GY](#) [UTPSP2GY](#) [UTPSP10GY](#) [UTPCH5GY](#) [UTP28SP15M](#) [UTP28CH100OR](#)
[74764-2301](#) [TRD815Y-10](#) [TRD855SIG-75](#) [E66A06002M020](#) [NPC-5E-010-GY](#) [SAC-5P-MS/ 1.0-920/FS SCO AR](#) [1-3636-601-5211](#) [1-3636-600-5212](#)