


NPN Transistor

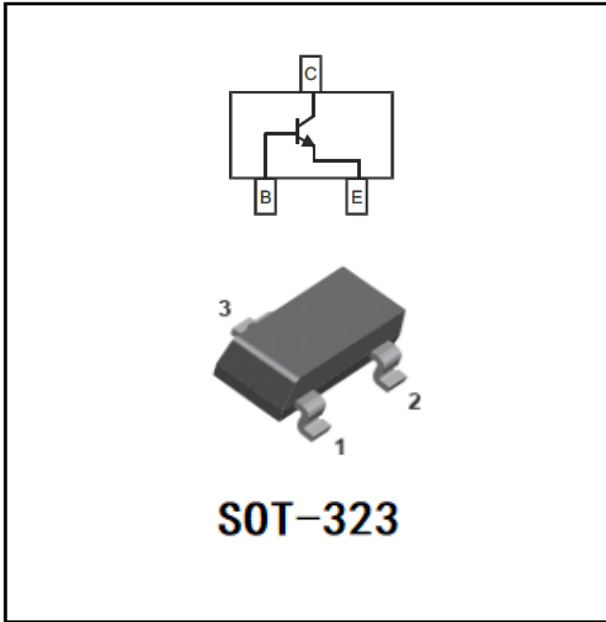

Features

- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion

Mechanical Data

- **Package:** SOT-323
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** K3P

■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	BVCBO	V	75
Collector-Emitter Voltage	BVCEO	V	40
Emitter-Base Voltage	BVEBO	V	6
Collector Current -Continuous	IC	mA	600
Total Device Dissipation	PD	mW	200
Junction Temperature	Tj	°C	150
Storage Temperature	TSTG	°C	-55 to +150

■ Electrical Characteristics (Ta=25°C unless otherwise noted)



Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	IC=10uA, IE=0	75		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	IC =10mA, IB=0	40		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	IE=10μA, IC=0	6		
Collector cut-off current	ICEX	nA	VCE=60V, VBE=3V			10
Base cut-off current	ICBO	nA	VCE=60V, IC=0			100
Emitter cut-off current	IEBO	nA	VEB=3 V, IC =0			100
DC current gain	hFE		VCE=10V, IC=0.1mA	20		







	h_{FE}		VCE=10V, IC=1mA	40	
	h_{FE}		VCE=10V, IC=10mA	80	
	h_{FE}		VCE=10V, IC=150mA	100	300
	h_{FE}		VCE=10V, IC=500mA	40	
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	IC=150mA, IB=15mA		0.3
Base-emitter saturation voltage	$V_{BE(sat)}$	V	IC=150mA, IB=15mA	0.6	1.2
Transition frequency	f_T	MHz	VCE=20V, IC=20mA, f=100MHz	300	
Delay time	t_d	ns	VCC=30V, VBE(off)=-0.5V IC=150mA, IB1=15mA		15
Rise time	t_r	ns			25
Storage time	t_s	ns	VCC=30V, IC=150mA, IB1=IB2=15mA		225
Fall time	t_f	ns			60

Ordering Information (Example)


Preferred P/N	Packing Code	Unit Weight(G)	Minimum Package(Pcs)	Inner Box Quantity(Pcs)	Outer Carton Quantity(Pcs)	Delivery Mode
MMST2222A	F2	Approximate 0.005	3000	30000	120000	7" reel

Characteristics (Typical)

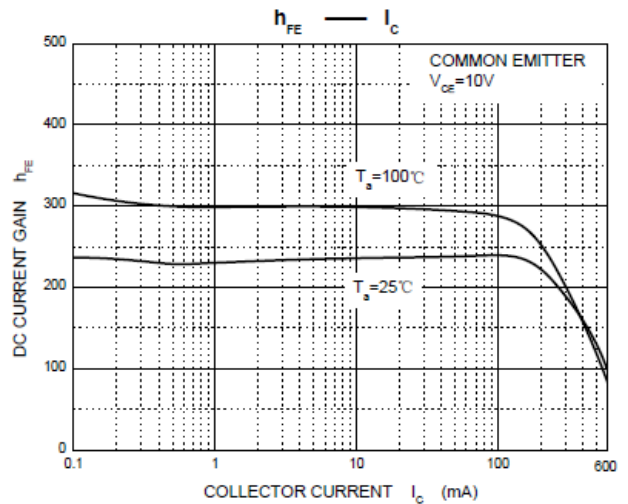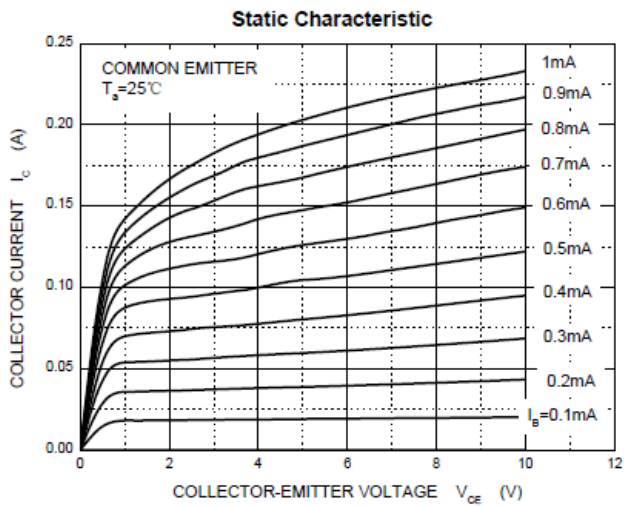

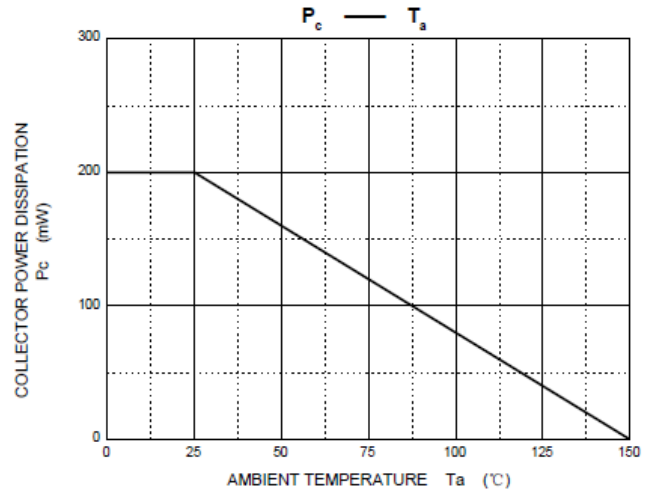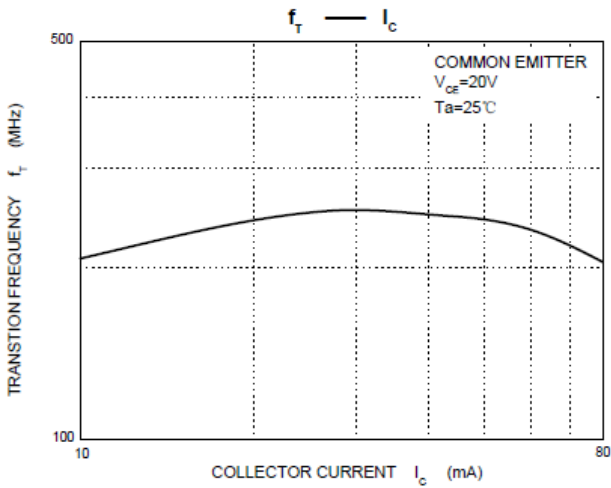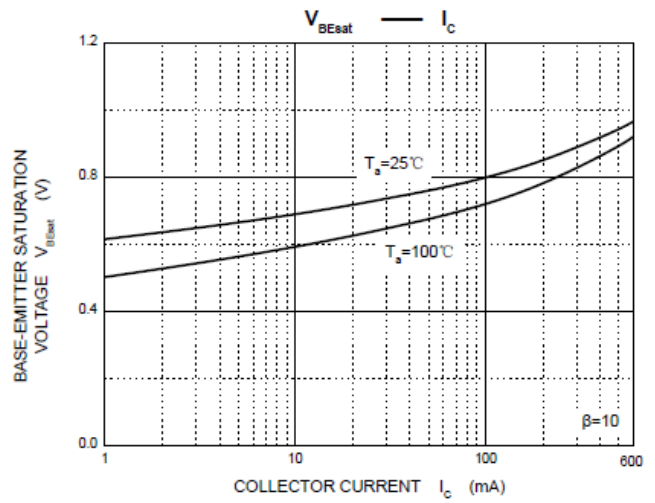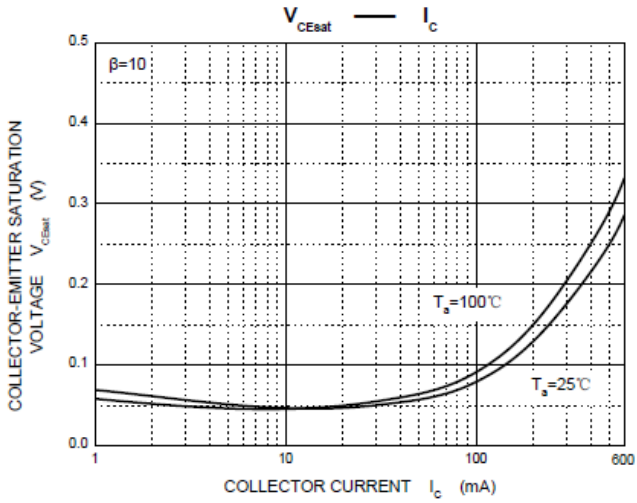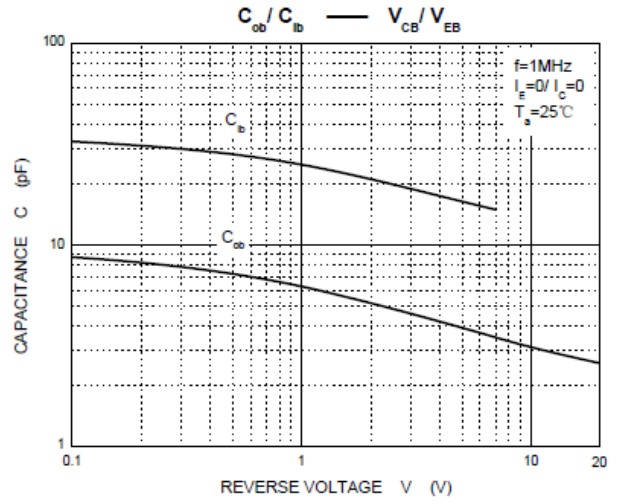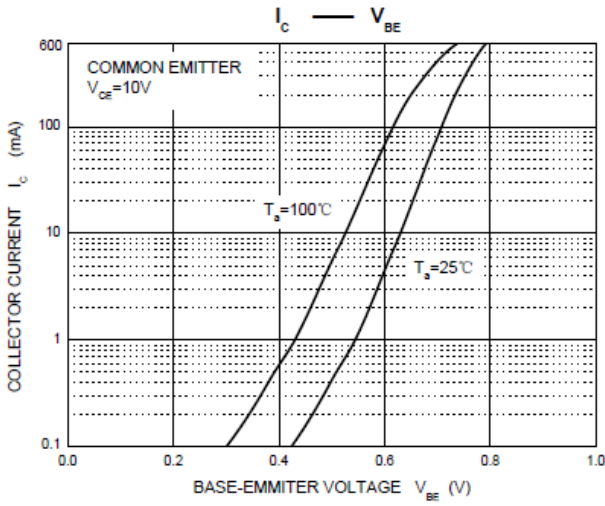


■ SOT-323 Package Outline Dimensions

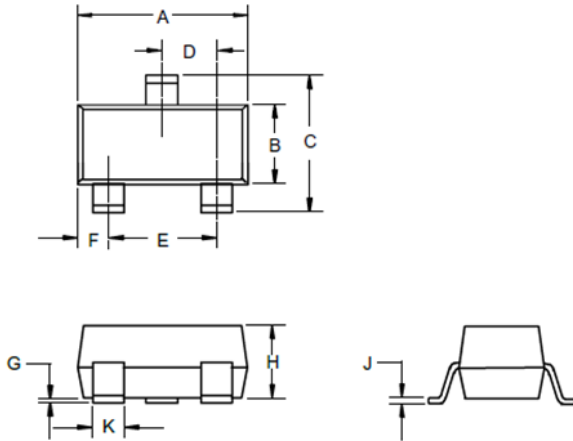

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

■ SOT-323 Suggested Pad Layout

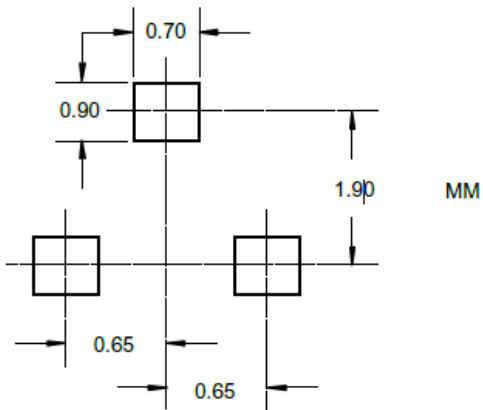

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Haolin manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)