


RS0106E Series 1A TRIACs

DESCRIPTION:

This device is suitable for low power AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.

MAIN FEATURES

Symbol	Value	Unit
IT(RMS)	1	A
VDRM/VRRM	600	V
VTM	≤ 1.5	V

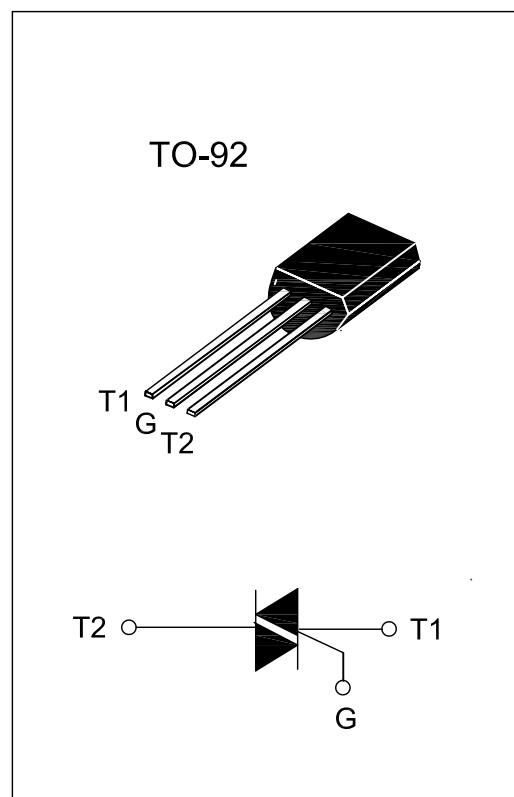

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit	
Storage junction temperature range	Tstg	- 40 to +150	°C	
Operating junction temperature range	Tj	- 40 to +125	°C	
Repetitive Peak Off-state Voltage	Tj=25°C	VDRM	600	V
Repetitive Peak Reverse Voltage	Tj=25°C	VRRM	600	V
Non repetitive Surge Peak Off-state Voltage	Tj=25°C	VDSM	700	V
Non repetitive Peak Reverse Voltage	Tj=25°C	VRSM	700	V
RMS on-state current (full sine wave)	Tc=110°C	IT(RMS)	1	A
Non repetitive surge peak on-state current (One Full Cycle,Sine Wave,Tc=110°C)	tp=10ms	ITSM	9	A
	tp=8.3ms		9.5	A
I ² t Value for fusing	tp=10ms	I ² t	0.45	A ² s
Peak gate current tp≤2us,Tj=80°C	IGM	1	A	
Average gate power dissipation tp≤ 10mS Tj=80°C	PG(AV)	0.1	W	
Peak gate power dissipation tp≤ 10mS Tj=80°C	PGM	1	W	

ELECTRICAL CHARACTERISTICS($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Test Condition	Quadrant		Ratings	Unit
I _{GT}	V _D =12V R _L =33Ω	I-II-III IV	MAX.	5 15	mA
V _{GT}		ALL	MAX.	1.5	V
V _{GD}	V _D =V _{DRM} R _L =3.3KΩ T _j =125°C	ALL	MIN.	0.2	V
I _H	I _T =200mA		MAX.	5	mA
dV/dt	V _D =67%V _{DRM} gate open T _j =125°C		MIN.	25	V/μs
(dV/dt) _c	(dI/dt) _c =0.3A/ms T _j =125°C		MIN.	0.5	V/μs


STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V _{TM}	I _{TM} =1.1A, tp=380μs	T _j =25°C	1.5	V
I _{DRM} I _{IRRM}	V _D =V _{DRM} V _R =V _{RRM}	T _j =25°C	5	μA
		T _j =125°C	100	μA

THERMAL RESISTANCES


Symbol	Parameter		Value	Unit
R _{th} (J-C)	Junction to Case(AC)	TO-92	75	°C/W

ORDERING INFORMATION

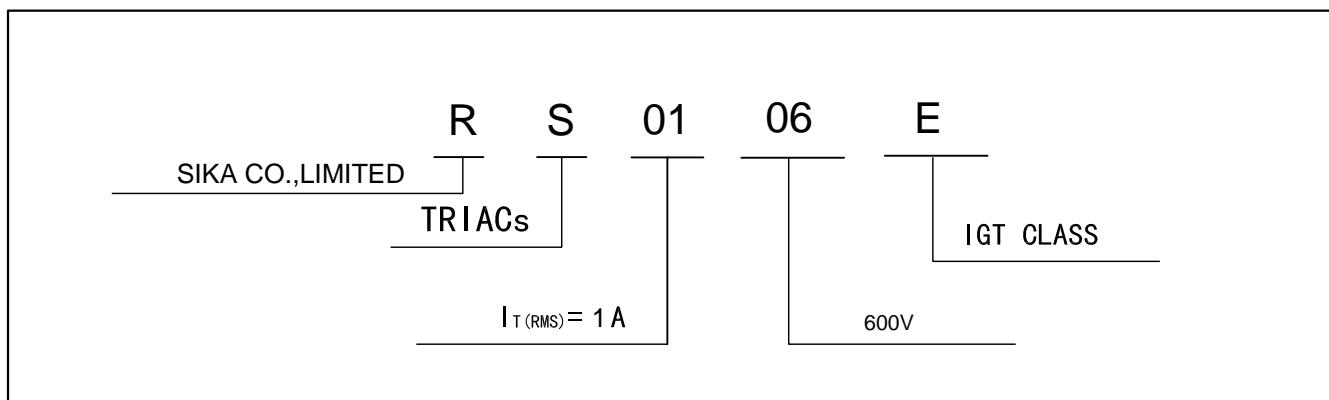

PACKAGE MECHANICAL DATA

TO-92(TO-226AA)

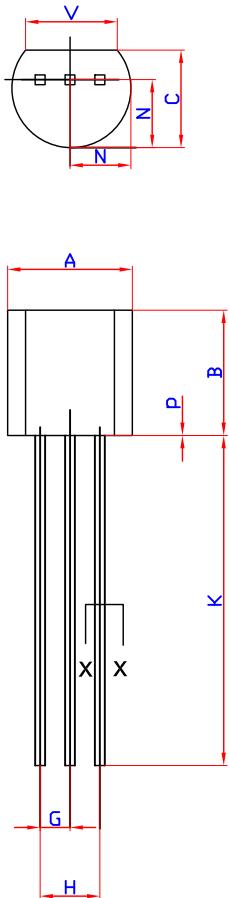

SECTION X-X

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.45	5.2	0.175	0.205
B	4.32	5.33	0.170	0.210
C	3.18	4.19	0.125	0.165
D	0.407	0.533	0.016	0.021
G	1.15	1.39	0.045	0.055
H	2.42	2.66	0.095	0.105
J	0.39	0.50	0.015	0.020
K	12.70	-	0.500	-
N	2.04	2.66	0.080	0.105
P	-	2.54	-	0.100
V	3.43	-	0.135	-

FIG.1: Maximum power dissipation versus average on-state current.

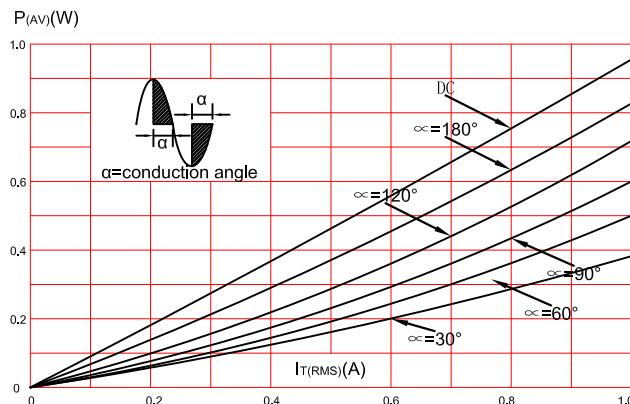


FIG.3: On-state characteristics (maximum values)

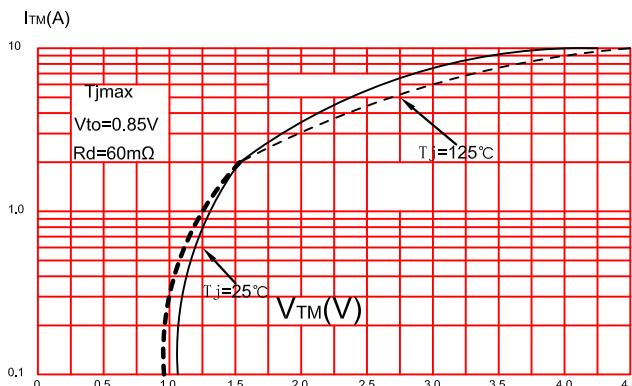


FIG.5: Relative variation of gate trigger current, holding current and latching current versus junction temperature(typical values).

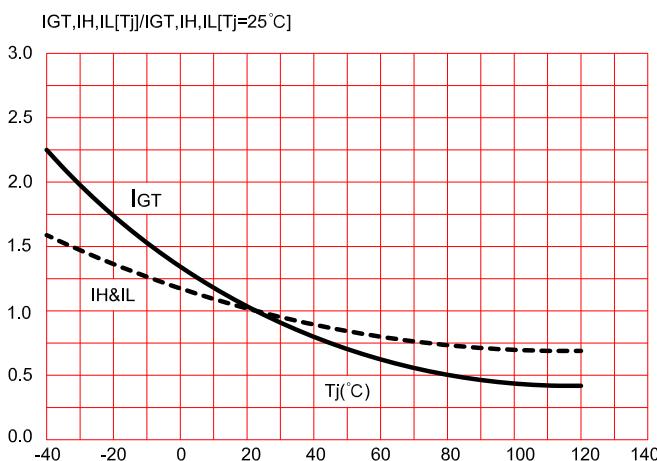


FIG.2: RMS on-state current versus case temperature.


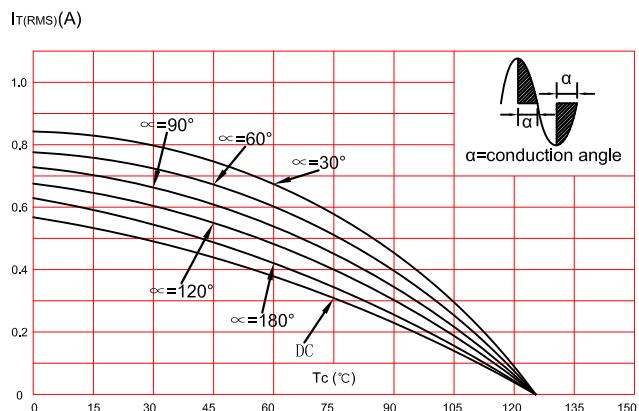


FIG.4: Surge peak on-state current versus number of cycles.

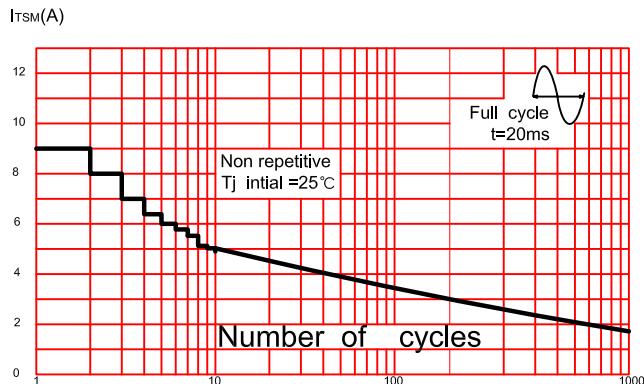

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [Haoruijia](#) manufacturer:

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [BT136-600,127](#) [BT137B-800,118](#) [BTA140-600,127](#)
[BTA208-800B,127](#) [MAC97A6,116](#) [BTA420-800BT,127](#) [BTA201W-800E,115](#) [BTA26-800CWRG](#) [BTA41-800BRG](#) [TMA164P-L](#)
[TMA166P-L](#) [TMA54S-L](#) [BT137-600E,127](#) [BTA140-800,127](#) [BTB16-600CW3G](#) [TMA84S-L](#) [Z0109MN,135](#) [T825T-6I](#) [T1635T-6I](#) [T1220T-6I](#) [NTE5638](#) [ACST1235-8FP](#) [BT134-600D,127](#) [BT134-600G,127](#) [BT136X-600E,127](#) [BT139X-800,127](#) [BTA204X-800C,127](#) [BTA216-600E,127](#) [BTA316X-600E/DG,12](#) [BTA316X-800C,127](#) [BT134-600D,127](#) [BT134-600E,127](#) [BT137X-600D,127](#) [BT139X-600E,127](#) [BTA08-600BW3G](#) [BTA201-800ER,126](#) [BTA208X-1000B,127](#) [BTA316X-800E,127](#) [NTE56008](#) [NTE56017](#) [NTE56018](#) [NTE56059](#) [NTE5608](#)
[NTE5609](#)