

RS12xxA/RS12xxB 12A TRIACs

DESCRIPTION:

High current density due to double mesa technology, SIPOS and Glass Passivation.

RS12xx series triacs is suitable for or for phase control operation, light dimmers,motor speed ON/OFF function in applications such as static relays, general purpose AC switching,They can be used as an heating regulation,induction motor starting circuits...controllers.



RS12xx-TW -SW -CW -BW are 3 quadrants triacs, They are specially recommended for use on inductive loads.

RS12xx are isolated in internally.they provide a 2500V RMS isolation voltage from all three terminals to external heat sink.


MAIN FEATURES

Symbol	Value	Unit
I _{T(RMS)}	12	A
V _{DRM/V_{RRM}}	600and800	V
V _{TM}	≤1.55	V

TO-220B (RS12xxB)

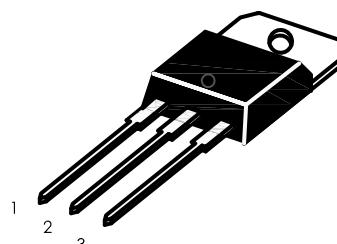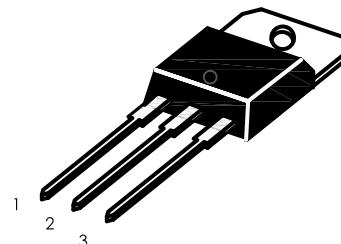

TO-220A insulated
(RS12xxA)

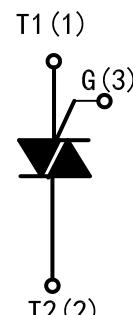

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range Operrating junction temperature range	T _{stg} T _j	-40 to +150 -40 to +125	°C
Repetitive Peak Off-state Voltage Repetitive Peak Reverse Voltage	V _{DRM} V _{RRM}	600and800 600and800	V
Non repetitive Surge Peak Off-state Voltage Non repetitive Peak Reverse Voltage	V _{D_{SM}} V _{R_{SM}}	700and900 700and900	V
RMS on-state current (full sine wave)	I _{T(RMS)}	12	A
TO-220AB Tc=105°C TO-220AB Ins Tc=90°C			
Non repetitive surge peak on-state current (full cycle,Tj=25°C)	I _{T_{SM}}	120 126	A
I ² t Value for fusing tp=10ms	I ² t	78	A ² s
Critical rate of rise of on-state current IG=2×IGT, tr≤100 ns, f=120Hz, Tj=125°C	dI /dt	50	A/us
Peak gate current tp=20us, Tj=125°C	I _{GM}	4	A
Average gate power dissipation Tj=125°C	P _{G(AV)}	1	W

ELECTRICAL CHARACTERISTICS($T_j=25^\circ\text{C}$ unless otherwise specified)

● 3 Quadrants

Symbol	Test Condition	Quadrant		RS12xxB/RS12xxA				Unit
				TW	SW	CW	BW	
I_{GT}	$V_D=12V \quad R_L=30\Omega$	I - II - III	MAX.	5	10	35	50	mA
V_{GT}		I - II - III	MAX.	1.3				V
V_{GD}	$V_D=V_{DRM} \quad R_L=3.3K\Omega$ $T_j=125^\circ\text{C}$	I - II - III	MIN..	0.2				V
I_L	$I_G=1.2I_{GT}$	I - III	MAX.	10	25	50	70	mA
		II		15	30	60	80	
I_H	$I_T=100mA$		MAX.	10	15	35	50	mA
dV/dt	$V_D=67\%V_{DRM}$ gate open $T_j=125^\circ\text{C}$		MIN.	20	40	500	1000	V/ μs
$(dI/dt)c$	(dV/dt) $c=0.1V/\mu\text{s}$ $T_j=125^\circ\text{C}$		MIN.	3.5	6.5	----	----	A/ms
	(dV/dt) $c=10V/\mu\text{s}$ $T_j=125^\circ\text{C}$			1.0	2.9	----	----	
	Without snubber $T_j=125^\circ\text{C}$			----	----	6.5	12	

● 4 Quadrants

Symbol	Test Condition	Quadrant		RS12xxB/RS12xxA		Unit	
				C	B		
I_{GT}	$V_D=12V \quad R_L=30\Omega$	I - II - III	MAX.	25	50	mA	
		IV		50	100		
V_{GT}	$V_D=V_{DRM} \quad R_L=3.3K\Omega$ $T_j=125^\circ\text{C}$	ALL	MAX.	1.3			
V_{GD}		ALL	MIN.	0.2			
I_L	$I_G=1.2I_{GT}$	I - III - IV	MAX.	40		mA	
		II		80		100	
I_H	$I_T=100mA$		MAX.	25		mA	
dV/dt	$V_D=67\%V_{DRM}$ gate open $T_j=125^\circ\text{C}$		MIN.	200		V/ μs	
$(dI/dt)c$	(dV/dt) $c=0.1V/\mu\text{s}$ $T_j=125^\circ\text{C}$		MIN.	----			
	(dV/dt) $c=10V/\mu\text{s}$ $T_j=125^\circ\text{C}$			----			
	Without snubber $T_j=125^\circ\text{C}$			----			


STATIC CHARACTERISTICS

Symbol	Test Conditions		Value (MAX)	Unit
V_{TM}	$I_{TM}=17A$, $t_p=380\mu S$	$T_j=25^\circ C$	1.55	V
I_{DRM}	$V_D=V_{DRM}$	$T_j=25^\circ C$	5	μA
I_{RRM}		$T_j=125^\circ C$	1	mA

THERMAL RESISTANCES


Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case (AC)	1.4	$^\circ C/W$
	TO-220AB Insulated	2.3	

ORDERING INFORMATION

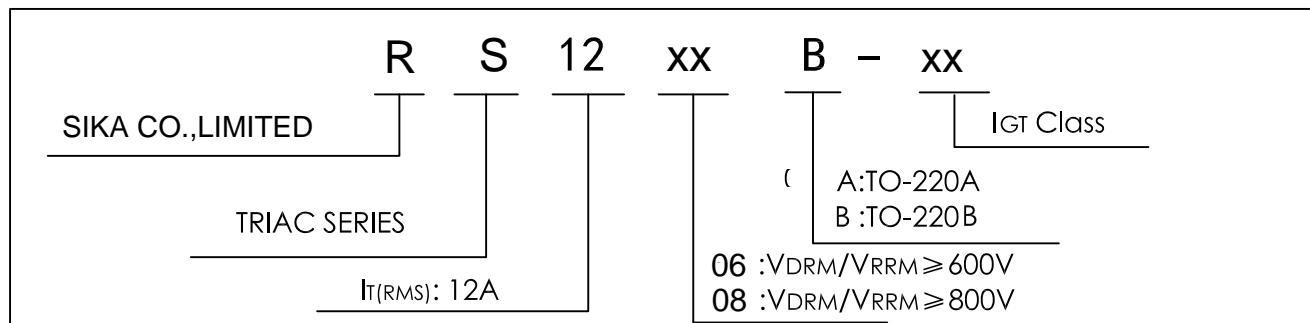

PACKAGE MECHANICAL DATA

TO-220AB

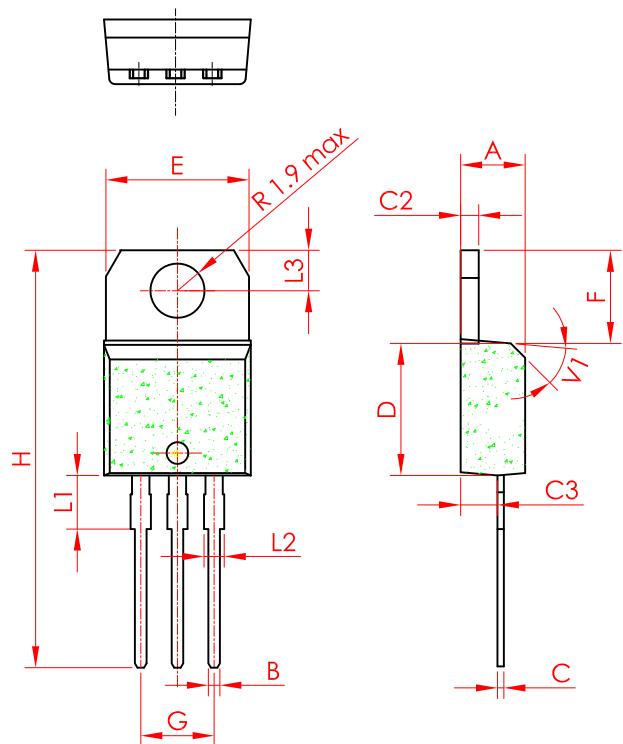

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.4		4.6	0.173		1.181
B	0.61		0.88	0.024		0.034
C	0.49		0.70	0.019		0.027
C2	1.23		1.32	0.048		0.051
C3	2.4		2.72	0.094		0.107
D	8.6		9.7	0.338		0.382
E	10		10.4	0.393		0.409
F	6.2		6.6	0.244		0.259
G	4.8		5.4	0.189		0.213
H	28.0		29.8	11.0		11.7
L1		3.75			0.147	
L2	1.14		1.7	0.044		0.066
L3	2.65		2.95	0.104		0.116
V1		40°			40°	

Fig. 1: Maximum power dissipation versus RMS on-state current(full cycle)

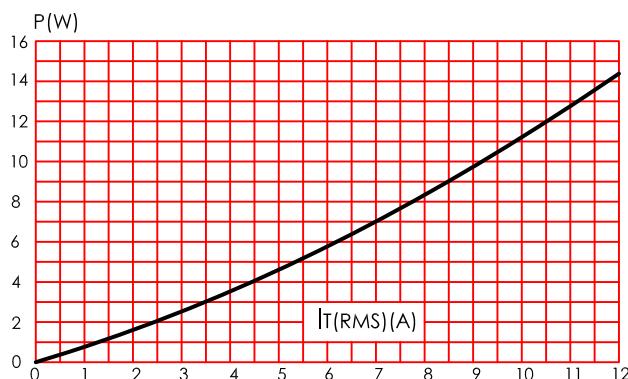


Fig. 3: on-state characteristics (maximum values)

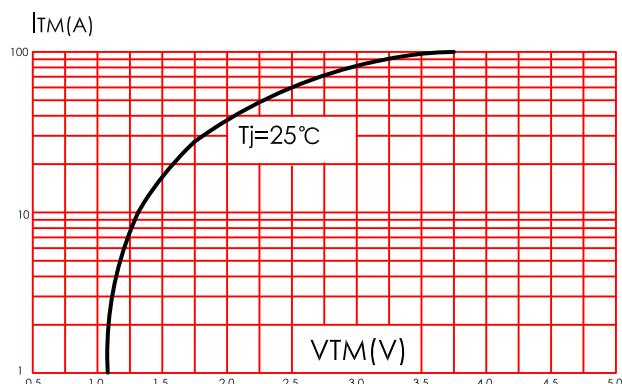


Fig. 5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{mS}$

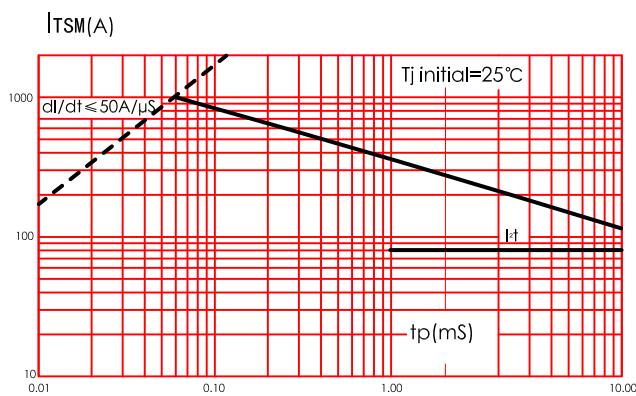


Fig. 2: RMS on-state current versus case temperature(full cycle)

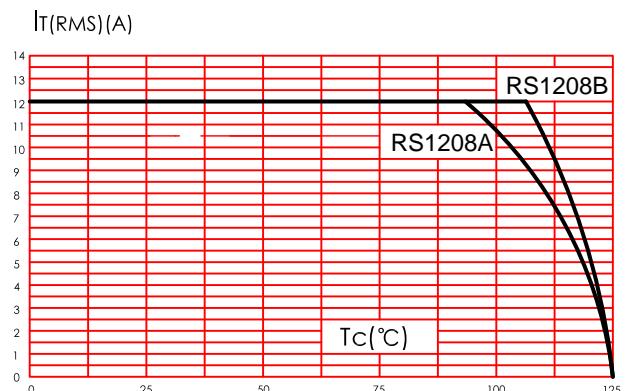


Fig. 4: Surge peak on-state current versus number of cycles


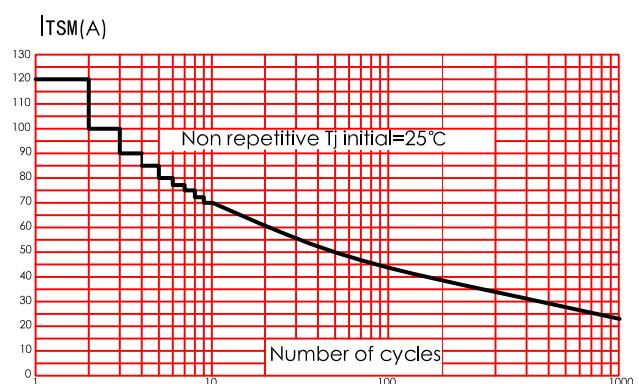


Fig. 6: Relative variation of gate trigger current, holding current and latching current versus junction temperature(typical values)

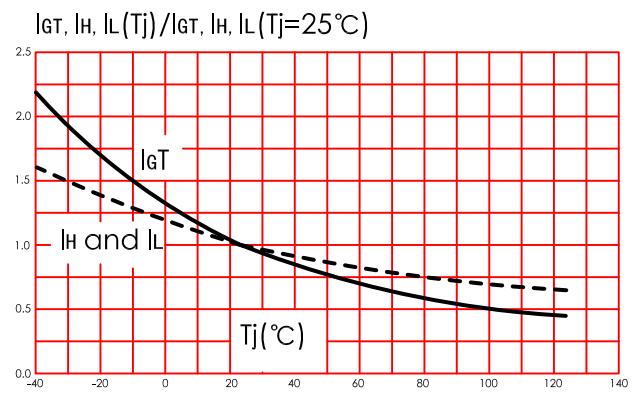

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [Haoruijia](#) manufacturer:

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [BT136-600,127](#) [BT137B-800,118](#) [BTA140-600,127](#)
[BTA208-800B,127](#) [MAC97A6,116](#) [BTA420-800BT,127](#) [BTA201W-800E,115](#) [BTA212B-800B,118](#) [BTA26-800CWRG](#) [BTA41-800BRG](#)
[TMA164P-L](#) [TMA166P-L](#) [TMA54S-L](#) [BT137-600E,127](#) [BTA140-800,127](#) [BTA30-600CW3G](#) [BTB16-600CW3G](#) [TMA84S-L](#)
[Z0109MN,135](#) [T825T-6I](#) [T1635T-6I](#) [T1220T-6I](#) [NTE5638](#) [ACST1235-8FP](#) [BT134-600D,127](#) [BT134-600G,127](#) [BT136X-600E,127](#)
[BT139X-800,127](#) [BTA204X-800C,127](#) [BTA216-600E,127](#) [BTA316X-600E/DG,12](#) [BTA316X-800C,127](#) [BT134-600D,127](#) [BT134-600E,127](#)
[BT137X-600D,127](#) [BT139X-600E,127](#) [BTA08-600BW3G](#) [BTA201-800ER,126](#) [BTA208X-1000B,127](#) [BTA316X-800E,127](#) [NTE56008](#)
[NTE56017](#) [NTE56018](#) [NTE56059](#)