

## RS16xx Series 16A TRIACs

### DESCRIPTION :

High current density due to double mesa technology, SIPOS and Glass Passivation.


RS16xxA/B series triacs is suitable for general purpose AC switching, They can be used as an ON/OFF function in applications such as static relays, heating regulation, induction motor starting circuits...or for phase control operation, light dimmers, motor speed controllers.

RS16xxA/B-SW -CW -BW are 3 quadrants triacs, They are specially recommended for use on inductive loads.

RS16xxA are isolated in internal, they provide a 2500V RMS isolation voltage from all three terminals to external heat sink.

### MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	16	A
$V_{DRM}/V_{RRM}$	600/800/1200	V
$V_{TM}$	1.55	V

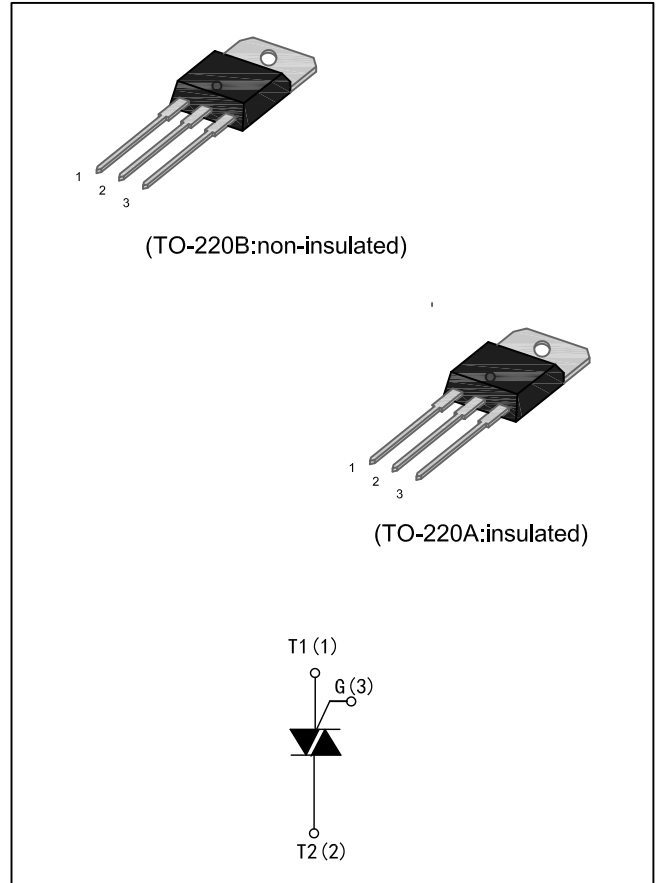

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	Tstg	-40 to +150	°C
Operating junction temperature range	Tj	-40 to +125	°C
Repetitive Peak Off-state Voltage	Tj=25°C	VDRM	600/800/1200 V
Repetitive Peak Reverse Voltage		VRRM	
Non repetitive Surge Peak Off-state Voltage	tp=10ms, Tj=25°C	VDSM	VDRM+100 V
Non repetitive Peak Reverse Voltage		VRSM	
RMS on-state current (full sine wave)	RS16xxB Tc=100°C	IT(RMS)	16 A
	RS16xxA Tc=86°C		
Non repetitive surge peak on-state current (full cycle, Tj=25°C)	f = 60 Hz t=16.7ms	ITSM	168 A
	f = 50 Hz t=20ms		
I²t Value for fusing	tp=10ms	I²t	144 A²s
Critical rate of rise of on-state current (IG=2×IGT, tr≤100 ns, f=120Hz, Tj=125°C)	di / dt	50	A/μs
Peak gate current (tp=20us, Tj=125°C)	IGM	4	A
Peak Gate Power Dissipation (tp=20us, Tj=125°C)	PGM	10	W
Average gate power dissipation (Tj=125°C)	PG(AV)	1	W

ELECTRICAL CHARACTERISTICS(T<sub>j</sub>=25°C unless otherwise specified)

## ● 3 Quadrants

Symbol	Test Condition	Quadrant		RS16xx				Unit
				TW	SW	CW	BW	
I <sub>GT</sub>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I-II-III	MAX.	5	10	35	50	mA
V <sub>GT</sub>		I-II-III	MAX.	1.3				V
V <sub>GD</sub>	V <sub>D</sub> =V <sub>DRM</sub> R <sub>L</sub> =3.3KΩ T <sub>j</sub> =125°C	I-II-III	MIN.	0.2				V
I <sub>L</sub>	I <sub>G</sub> =1.2I <sub>GT</sub>	I-III	MAX.	15	20	50	70	mA
		II	MAX.	25	35	60	80	mA
I <sub>H</sub>	I <sub>T</sub> =500mA		MAX.	10	15	40	60	mA
dV/dt	V <sub>D</sub> =67%V <sub>DRM</sub> gate open T <sub>j</sub> =125°C		MIN.	20	40	400	1000	V/μs
(dI/dt) <sub>c</sub>	(dV/dt) <sub>c</sub> =0.1V/μs T <sub>j</sub> =125°C		MIN.	3.5	8.5	---	---	A/ms
	(dV/dt) <sub>c</sub> =10V/μs T <sub>j</sub> =125°C			1.0	3.0	---	---	
	Without snubber T <sub>j</sub> =125°C			---	---	8.5	14	

## ● 4 Quadrants

Symbol	Test Condition	Quadrant		RS16xx		Unit
				C	B	
I <sub>GT</sub>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I-II-III IV	MAX.	25 50	50 100	mA
V <sub>GT</sub>		ALL	MAX.	1.3		V
V <sub>GD</sub>	V <sub>D</sub> =V <sub>DRM</sub> R <sub>L</sub> =3.3KΩ T <sub>j</sub> =125°C	ALL	MIN.	0.2		V
I <sub>L</sub>	I <sub>G</sub> =1.2I <sub>GT</sub>	I-III-IV	MAX.	40	50	mA
		II	MAX.	80	100	mA
I <sub>H</sub>	I <sub>T</sub> =500mA		MAX.	25	50	mA
dV/dt	V <sub>D</sub> =67%V <sub>DRM</sub> gate open T <sub>j</sub> =125°C		MIN.	200	400	V/μs
(dV/dt) <sub>c</sub>	(dI/dt) <sub>c</sub> =7A/ms T <sub>j</sub> =125°C		MIN.	5	10	V/μs


## STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V <sub>TM</sub>	I <sub>TM</sub> =22.5A, t <sub>p</sub> =380μs	T <sub>j</sub> =25℃	1.55	V
I <sub>DRM</sub> I <sub>RRM</sub>	V <sub>D</sub> =V <sub>DRM</sub> V <sub>R</sub> =V <sub>RRM</sub>	T <sub>j</sub> =25℃	5	μA
		T <sub>j</sub> =150℃	2	mA

## THERMAL RESISTANCES


Symbol	Parameter		Value	Unit
R <sub>th(j-c)</sub>	Junction to Case(AC)	TO-220B	2.1	℃/W
		TO-220A	1.2	
R <sub>th(j-a)</sub>	Junction to ambient (S=1cm <sup>2</sup> )	TO-220A	60	℃/W
		TO-220B	60	

## ORDERING INFORMATION

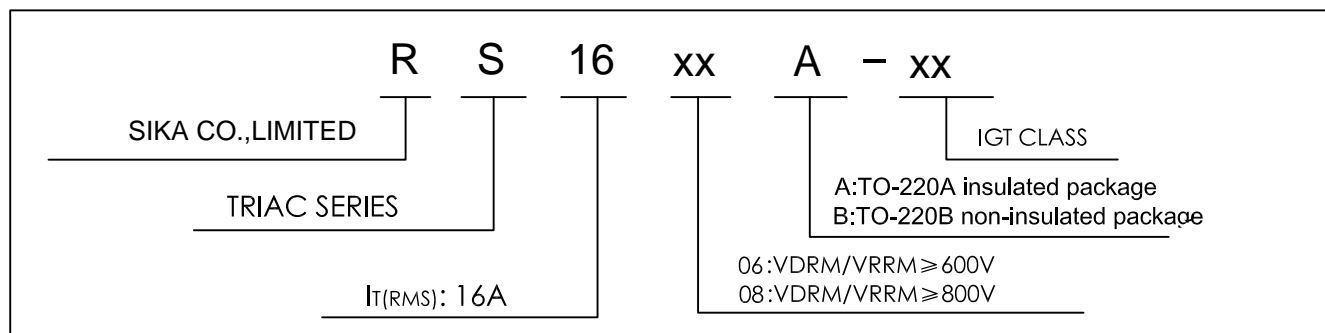

PACKAGE MECHANICAL DATA

TO-220A insulated package and TO-220B non-insulated package

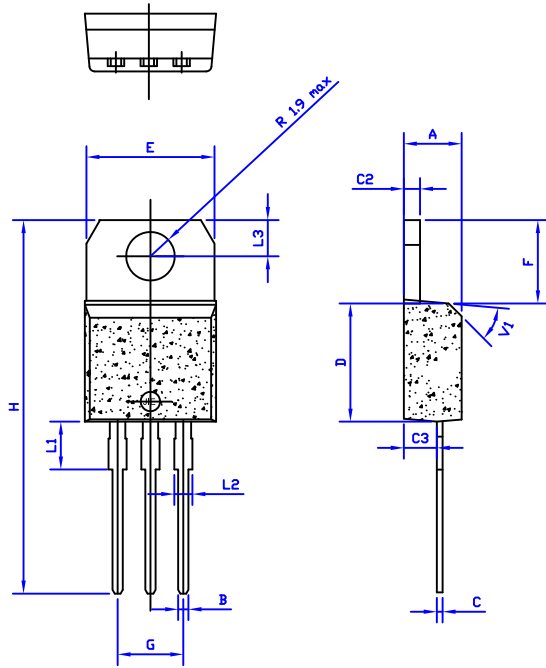

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.4		4.6	0.173		1.181
B	0.61		0.88	0.024		0.034
C	0.46		0.70	0.018		0.027
C2	1.23		1.32	0.048		0.051
C3	2.4		2.72	0.094		0.107
D	8.6		9.7	0.338		0.382
E	9.8		10.4	0.386		0.409
F	6.2		6.6	0.244		0.259
G	4.8		5.4	0.189		0.213
H	28.0		29.8	11.0		11.7
L1		3.75			0.147	
L2	1.14		1.7	0.044		0.066
L3	2.65		2.95	0.104		0.116
V1		40°			40°	

FIG.1:Maximum power dissipation versus RMS on-state current(full cycle)

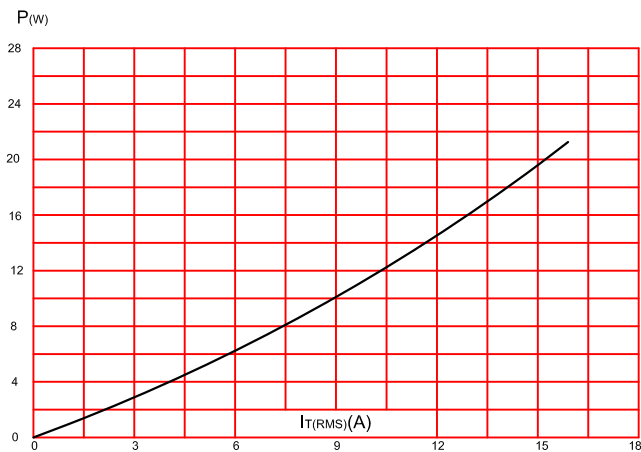


FIG.2:RMS on-state current versus case temperature(full cycle)

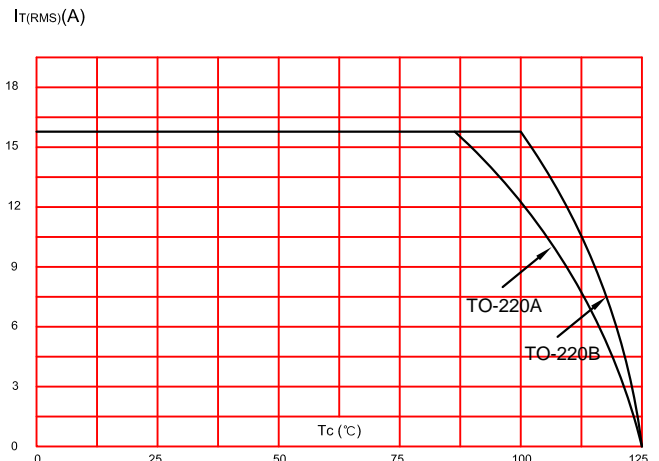


FIG.3:On-state characteristics (maximum values).

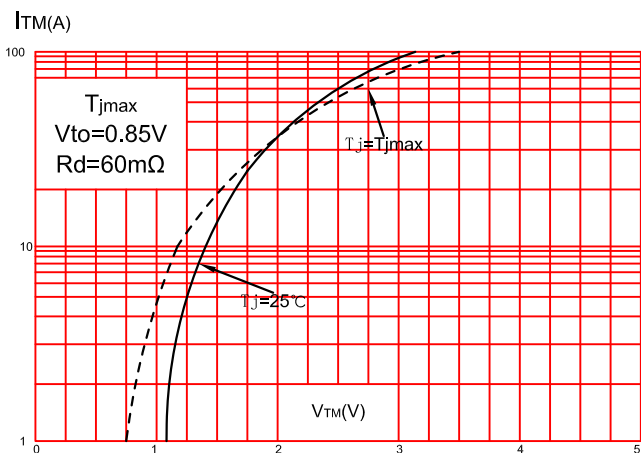


FIG.4:Surge peak on-state current versus number of cycles.

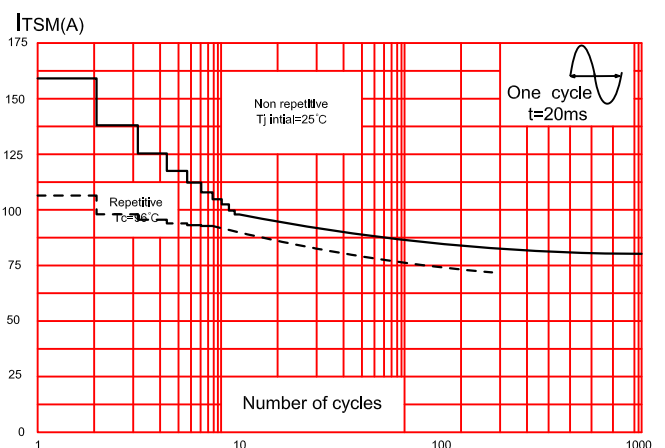


FIG.5:Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10ms$ , and corresponding value of  $I^2t$ .


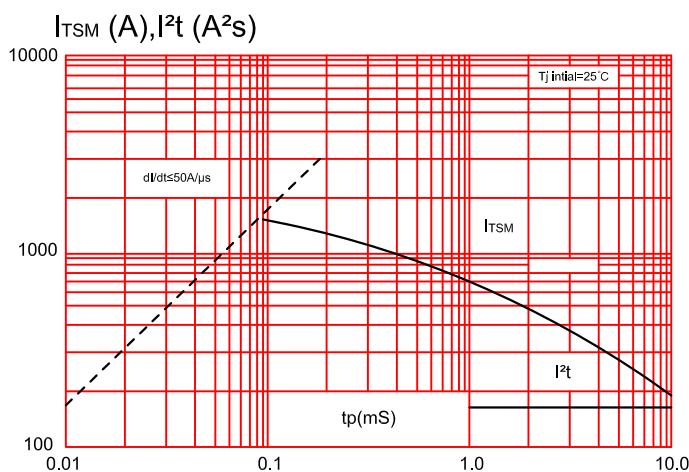


FIG.6:Relative variations of gate trigger current, holding current and latching current versus junction temperature(typical values)

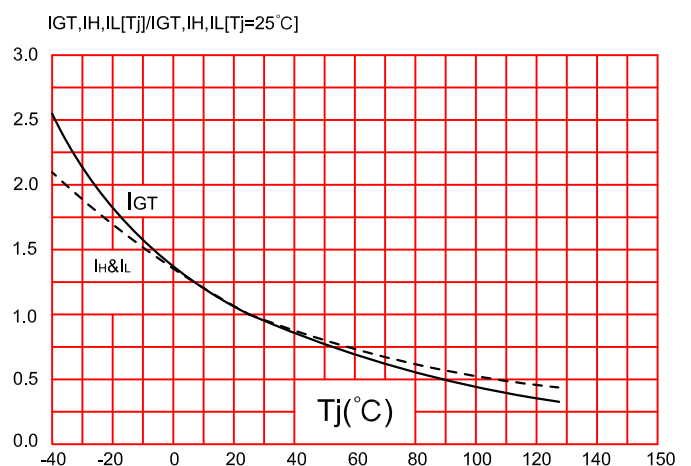

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Triacs](#) category:*

*Click to view products by [Haoruijia](#) manufacturer:*

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [ACS102-5T1](#) [ACS102-5TA](#) [MAC97A4G](#) [Z0107MAG](#)  
[Z0107MARL1G](#) [Z0109MARLRPG](#) [MAC97A8-TA](#) [BT131W-800](#) [BT138S-800E](#) [BT137S-800E](#) [BT136S-600D](#) [BTA08-600TWRG](#)  
[X0405MF-252](#) [MAC97A8-23-3L](#) [MCR100-8-23-3L](#) [BTA24-800B](#) [BT151-600R](#) [BT131](#) [BTA41-1200B](#) [MCR16](#) [MCR100-8](#) [MCR16](#)  
[BT131-800D](#) [BT134-800E](#) [BT138-800E](#) [MCR100-8](#) [BTA12-800BWRG\(UMW\)](#) [BTA24-600BWRG\(UMW\)](#) [BTA24-800BWRG\(UMW\)](#)  
[BTA12-600BWRG\(UMW\)](#) [BTA16-600CRG\(UMW\)](#) [BTA12-600CRG\(UMW\)](#) [BS61089B-8](#) [BT134W-600E](#) [BT134-600E](#) [JR0405S3](#)  
[BCR12PM](#) [MAC97A6](#) [BTA24-800CRG\(UMW\)](#) [BTA16-600BRG\(UMW\)](#) [BTA16-800BWRG\(UMW\)](#) [Z0109-NN](#) [BTA41](#) [MCR100-8U](#)