

DIN-Signal high current m, 10A solder



Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---------------------------------------------------------------------------------------|
| Part number | 09 03 000 6101 |
| Specification | DIN-Signal high current m, 10A solder |
| HARTING eCatalogue | https://b2b.harting.com/09030006101 |

Identification

| | |
|---------------------------------------------------|-------------------------------------------------|
| Category | Contacts |
| Series | DIN 41612 |
| Type of contact | Solder contact |
| Description of the contact | Straight |
| Contacts for | DIN 41612 Type M |
| | DIN 41612 Type M invers |
| | DIN 41612 Type MH 21+5 |
| | DIN 41612 Bauform M 0+2 |
| | har-modular [®] M module, male, angled |
| har-modular [®] M module, male, straight | |

Version

| | |
|-----------------------|----------------------------------|
| Gender | Male contact for male connectors |
| Manufacturing process | Turned contacts |

Technical characteristics

| | |
|-------------------|-------|
| Operating current | ≤10 A |
| Performance level | 1 |
| Mating cycles | ≥500 |

Material properties

| | |
|---------------------|--------------------------------------------------------|
| Material (contacts) | Copper alloy |
| Surface (contacts) | Noble metal over Ni Mating side |
| RoHS | compliant with exemption |
| RoHS exemptions | 6(c): Copper alloy containing up to 4 % lead by weight |



Pushing Performance

Material properties

| | |
|--------------------------------------|--------------------------------------|
| ELV status | compliant with exemption |
| China RoHS | 50 |
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Lead |
| ECHA SCIP number | 339476a1-86ba-49e9-ab4b-cd336420d72a |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Nickel Lead |

Specifications and approvals

| | |
|----------------|-----------|
| Specifications | DIN 41626 |
|----------------|-----------|

Commercial data

| | |
|--------------------------------|--------------------------------------------|
| Packaging size | 100 |
| Net weight | 2.092 g |
| Country of origin | Germany |
| European customs tariff number | 85366990 |
| eCl@ss | 27440204 Contact for industrial connectors |




Pushing Performance

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

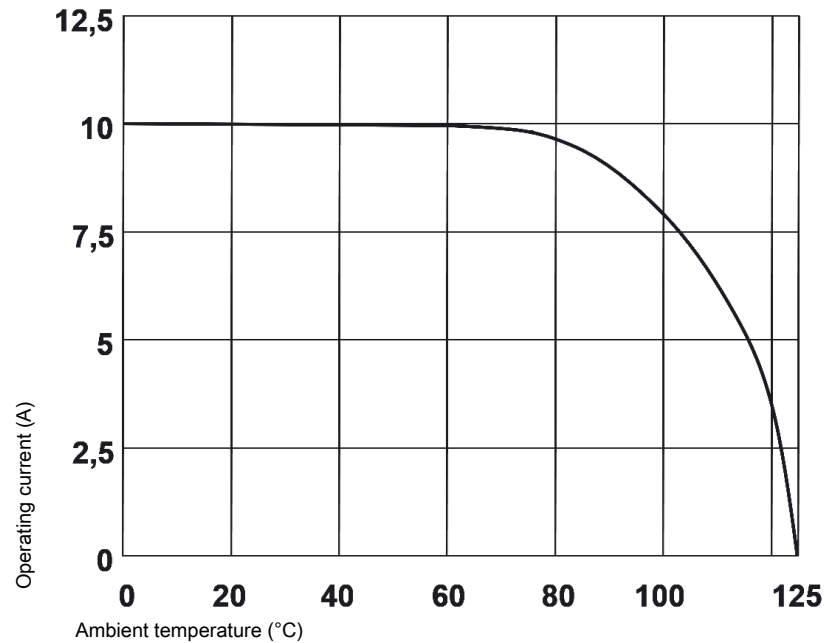

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN 41612 Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[004.767](#) [608489050008049](#) [691327-1](#) [74670-0732](#) [74680-0340](#) [75880-0015](#) [76453-0014](#) [86093159ALF](#) [9732967801](#) [QLC260R](#)
[120X10019X](#) [120X10089X](#) [122A10249X](#) [122A10669X](#) [122A11089X](#) [122A13089X](#) [122A10089X](#) [122A10129X](#) [122A10349X](#)
[122A13359X](#) [1377391-4](#) [DIN-048CPC-SR1-MH](#) [1393583-2](#) [1393726-7](#) [140X10129X](#) [143-1913-000](#) [143-1908-000](#) [1484472-1](#) [2110070-1](#)
[2110070-2](#) [CBC20T00-008FDS5-0-1-002VR](#) [172699-5036](#) [2-1393557-4](#) [2-1437084-2](#) [CTJ720E01B-6141](#) [394506](#) [419-2080-402](#)
[V42254B2202C968](#) [419-2086-201](#) [419-2087-002](#) [448657-1](#) [448847-3](#) [5-1393755-9](#) [02990000004](#) [054302](#) [043556](#) [09062483201750](#)
[0850033067](#) [09031646555](#) [09061486901840](#)