


Loading plan

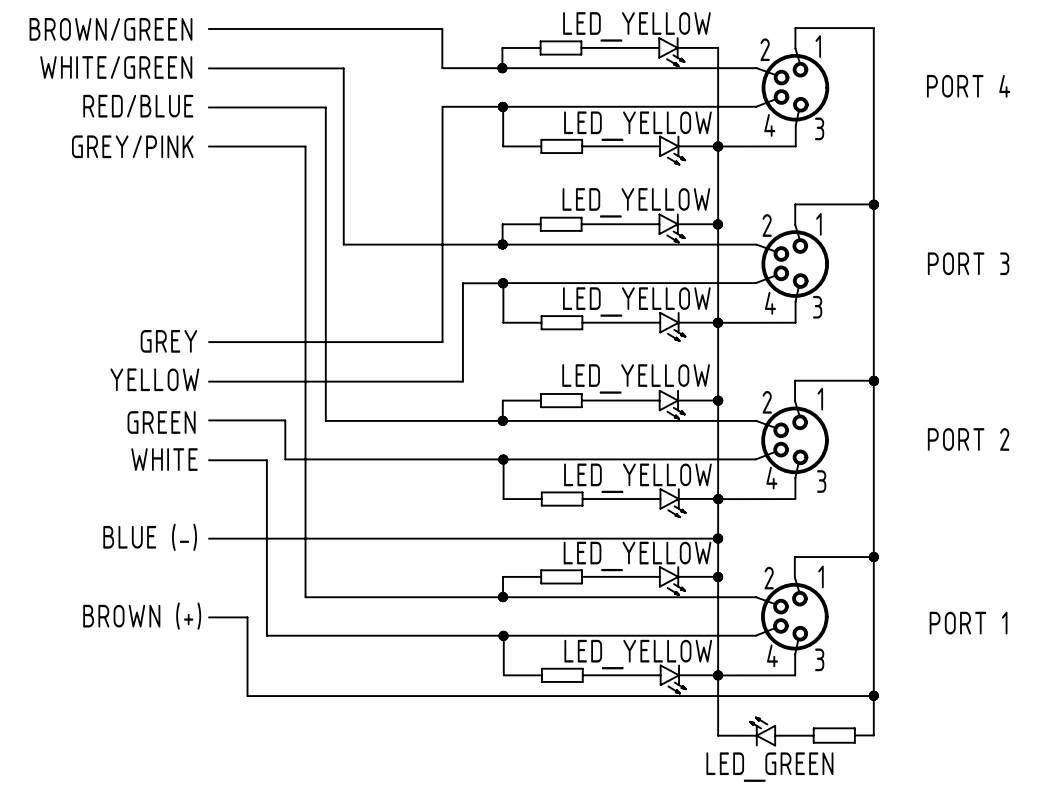

- Protection level: IP 67
- Temperature range: -25°C...+80°C

- Electrical data:
- Rated voltage: 15-30V DC
 - Nominal: 2 A per Contact
 - Current: 6 A max total

PUR, max. 16x0.34 + 2x0.75	10
Type of cable	Dim. a[m]

	All rights reserved Department HCS - RO	Created by MUNTEANV	Inspected by POPESCU	Standardisation AVRAM	Date 2017-04-24	State Final Release	Doc-Key / ECM-Nr. 100689718/UGD/000/C 500000118447 Rev. C Page 1/1
	Title har-SAB M8/4/4p PAC		Type TB		Number 090700101100		
All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
HARTING Customised Solutions D-32427 Minden							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#)
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#) [1200651713](#) [1200660844](#)
[1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#)
[1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#)
[1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#)
[1210502211](#) [1210400542](#)