

## Han Brid-Firewire-F Wanddurchführung

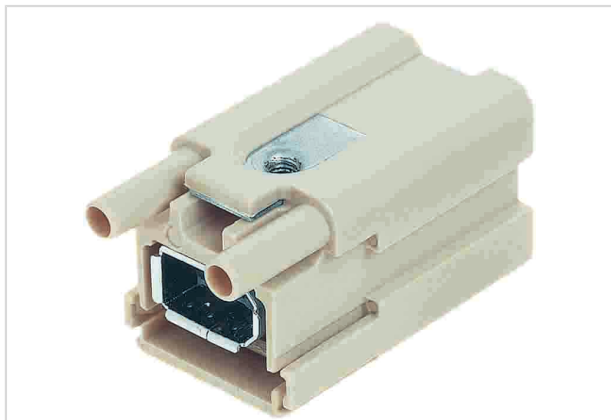


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 12 001 2774  |
| Specification      | Han Brid-Firewire-F Wanddurchführung  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09120012774">https://b2b.harting.com/09120012774</a> |

### Identification

|                |                    |
|----------------|--------------------|
| Category       | Inserts            |
| Series         | Han-Brid®          |
| Identification | Han-Brid® FireWire |

### Version

|                    |             |
|--------------------|-------------|
| Gender             | Male        |
| Size               | 3 A         |
| Number of contacts | 2           |
| further contacts   | + FireWire  |
| Details            | Device side |

### Technical characteristics

|                       |                          |
|-----------------------|--------------------------|
| Rated current         | 1 A                      |
| Rated voltage         | 50 V                     |
| Rated impulse voltage | 0.8 kV                   |
| Pollution degree      | 3                        |
| Insulation resistance | $>10^{10} \Omega$        |
| Contact resistance    | $\geq 4 \text{ m}\Omega$ |
| Limiting temperature  | -40 ... +85 °C           |
| Mating cycles         | $\geq 500$               |

### Material properties

|                   |                    |
|-------------------|--------------------|
| Material (insert) | Polycarbonate (PC) |
|-------------------|--------------------|



Pushing Performance

## Material properties

|   |                        |
|---|------------------------|
| Colour (insert)                           | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0                    |
| RoHS                                      | compliant              |
| ELV status                                | compliant              |
| China RoHS                                | e                      |
| REACH Annex XVII substances               | No                     |
| REACH ANNEX XIV substances                | No                     |
| REACH SVHC substances                     | No                     |
| California Proposition 65 substances      | Yes                    |
| California Proposition 65 substances      | Nickel                 |

## Specifications and approvals

|                |  |
|----------------|--|
| Specifications | EN 60664-1<br>IEC 61984                                    |
| UL / CSA       | UL 1977 ECBT2.E235076<br>CSA-C22.2 No. 182.3 ECBT8.E235076 |

## Commercial data

|                                |   |
|--------------------------------|---|
| Packaging size                 | 10  |
| Net weight                     | 14.88 g   |
| Country of origin              | Germany   |
| European customs tariff number | 85366990  |
| eCl@ss                         | 27440205 Contact insert for industrial connectors |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [829992-1](#) [902-77-02113](#) [129-1J](#) [AN0024023](#) [E6374G1](#)  
[e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-](#)  
[S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#)  
[KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#) [29652](#) [1646905-1](#) [1648320-1](#) [1648582-1](#) [1650195-2](#)