



DIN Signal male connector straight - THR (CTI>400)



General information

| | | |
|--------------------------------|--|--|
| Design | IEC 60603-2 | types: Q, 2Q, 3Q, R, 2R, 3R, R (HE11) male |
| No. of contacts | max. 96 | |
| Contact spacing | 2,54mm | |
| Test voltage | 1000V | |
| Contact resistance | ≤ 15mΩ | |
| Insulation resistance | ≥ 10 ¹⁰ Ω | |
| Working current | max. 2A at 20°C (see derating diagram) | |
| Temperature range | -55°C ... +125°C | |
| Termination technology | THR with solder pins, press-in | |
| Clearance & creepage distance | min. 1,2mm each | |
| Insertion and withdrawal force | 20-pole ≤ 20N | 48-pole ≤ 45N |
| | 30-pole ≤ 30N | 64-pole ≤ 60N |
| | 32-pole ≤ 30N | 96-pole ≤ 90N |
| Mating cycles | acc. to performance level, see table below | |
| UL file | E102079 | |
| RoHS - compliant | Yes | |
| Leadfree | Yes | |
| Hot plugging | No | |

Insulator material

| | |
|---------------------------------|--|
| Material | PCT (thermoplastics, glass fiber reinforcement 30%) |
| Colour | natural coloured, colour deviations and speckles permitted |
| UL classification | UL 94-V0 |
| Material group acc. IEC 60664-1 | II (400 ≤ CTI < 600) |
| NFF classification | I3, F3 |

Contact material

| | |
|--------------------------|--|
| Contact material | Copper alloy |
| Plating termination zone | Sn over Ni for solder, Ni for press-in |
| Plating contact zone | acc. to performance level, see table below |

| performance level | mating cycles | | plating contact zone |
|-------------------|---------------------|-----------------------------------|---|
| | acc. to IEC 60603-2 | complementary acc. to IEC 60603-2 | |
| 1 | 500 | | <i>Au over PdNi over Ni</i> |
| 2 | 400 | | <i>Au over PdNi over Ni</i> |
| 3 | 50 | | <i>Au over PdNi over Ni</i> |
| NM30 (S4) | | 500 | min. 0,76µm (30µinch) noble metal (alloy) over Ni |
| Au30 | | 500 | min. 0,76µm (30µinch) Au over Ni |
| Au50 | | 500 | min. 1,27µm (50µinch) Au over Ni |


Standard plating options highlighted in *italic*, other plating options are available on request.

Derating diagram acc. to IEC 60512-5 (current carrying capacity)

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals.


The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5

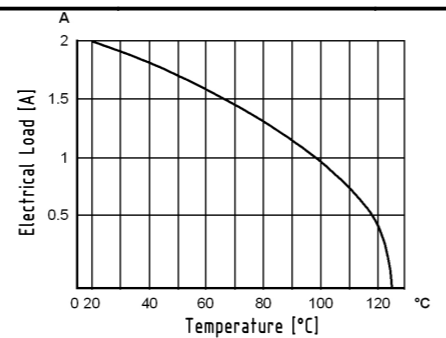

Recommended configuration of plated through holes for press-in termination

In addition to the hot-air-level (HAL), other PCB surfaces are getting more important. Due to their different properties - such as mechanical strength and coefficient of friction - we recommend the following configuration of PCB through holes.

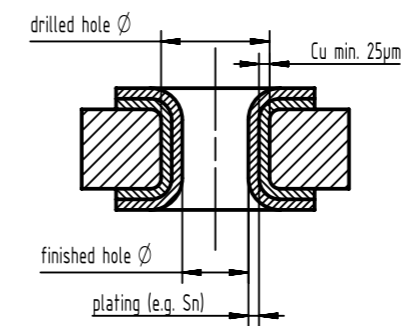

| Material | Drilled hole Ø | Plated hole Ø |
|---|----------------|---------------|
| Tin plated PCB (HAL) acc. to EN 60352-5 | 1,15±0,025mm | max. 15µm |
| | | 0,94 - 1,09mm |
| Chemical tin plated PCB | 1,15±0,025mm | min. 0,8µm |
| | | 1,00 - 1,10mm |
| Gold /Nickel plated PCB | 1,15±0,025mm | 3 - 7µm |
| | | 0,05 - 0,12µm |
| | | 1,00 - 1,10mm |
| Silver plated PCB | 1,15±0,025mm | 0,1 - 0,3µm |
| | | 1,00 - 1,10mm |
| Copper plated PCB (OSP) | 1,15±0,025mm | |
| | | 1,00 - 1,10mm |

Assembly instructions

It is highly recommended to use HARTING press-in tools to ensure a reliable press-in process. Please refer to the catalogue for tools, machines and further information about the press-in process.

Soldering instructions

THR (Through Hole Reflow) connectors are designed to be used in a reflow oven together with other SMD (Surface Mount Device) components. In this process, called as well „Pin in Hole Intrusive Reflow“, the connectors are inserted into plated through holes in a comparable way to conventional component mounting. All other components can be assembled on the pcb surface.

The length of the connector contacts should be such that they protrude by no more than 15 millimetres after insertion to the pcb. Each contact collects solder on its tip as it penetrates the solder paste in the hole. So if the contact is too long, this solder would no longer be able to reflow back into the plated through hole by capillary action during the soldering process, therefore the quality of the soldered connection would suffer as a result.

Quantity of solder paste


Before the components are assembled, solder paste must be applied to all the solder pads (for connecting surface-mount components) and the plated through holes. To ensure that the plated through holes are completely filled, significantly more solder paste must be applied than traditional solder pads on the pcb surface. There are numerous calculation methods available which are complicated to apply. The following rule of thumb has proved valuable in practice:

$$VPaste = 2(VH - VP)$$

in which:
VPaste = Required volume of solder paste
VH = Volume of the plated through hole
VP = Volume of the connector termination in the hole

Comment: the multiplier "2" compensates for solder paste shrinkage during soldering. For this purpose, it was assumed that 50 % of the paste consists of the actual solder, the other 50 % being soldering aids.

Cross section of solder termination

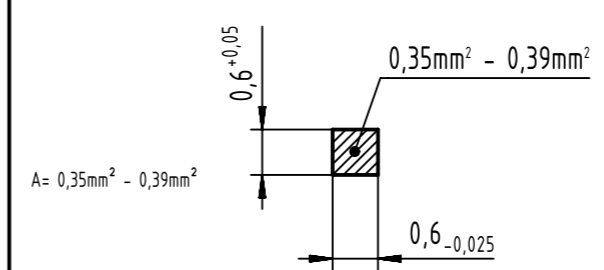

| | | | | |
|---|---|-----------------------|-------------------------|--|
| | All Dimensions in mm Original Size DIN A3 | Scale 1:1 | Free size tol. | Ref. |
| | All rights reserved Department EC PD - DE | Created by STORCK | Inspected by LEHNERT | Standardisation HOFFMANN |
| HARTING Electronics GmbH D-32339 Espelkamp | Title DIN Signal male connector straight - THR (CTI>400) | | | Doc-Key / ECM-Nr. 100571108/UGD/001/C 500000135180 |
| | Type DS | Number 09731130201 | Rev. C | Page 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN 41612 Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[09231126901](#) [PCN10F-24P-2.54DS\(72\)](#) [004.767](#) [02221602702](#) [024069](#) [602427301412000](#) [013275](#) [691327-1](#) [74670-0732](#) [74680-0340](#)
[75880-0015](#) [76453-0014](#) [86093159ALF](#) [923454](#) [QLC260R](#) [120X10099X](#) [120X10019X](#) [120X10089X](#) [120X10129X](#) [121A10039X](#)
[121A10309X](#) [122A10019X](#) [122A10029X](#) [122A10249X](#) [122A10669X](#) [122A11089X](#) [122A13089X](#) [122A10089X](#) [122A10129X](#)
[122A10349X](#) [122A13359X](#) [1377391-4](#) [1393583-2](#) [1393726-7](#) [140X10059X](#) [140X10129X](#) [143-1913-000](#) [143-1908-000](#) [1484472-1](#) [173052](#)
[2110070-1](#) [2110070-2](#) [CBC20T00-008FDS5-0-1-002VR](#) [983-0SE12-12P6](#) [17041102202](#) [172699-5036](#) [173051](#) [PCN10-96S-2.54DSA\(77\)](#) [2-](#)
[1393557-4](#) [2-1437084-2](#)