

## Han PushPull Power 4/0 F QL 1.5mm



Image is for illustration purposes only. Please refer to product description.

Part number	09 35 234 0421
Specification	Han PushPull Power 4/0 F QL 1.5mm
HARTING eCatalogue	<a href="https://b2b.harting.com/09352340421">https://b2b.harting.com/09352340421</a>

### Identification

Category	Connectors
Series	Han <sup>®</sup> PushPull (V14)
Identification	Power
Element	Connector sets
Features	Intuitive locking mechanism

### Version

Termination method	Han-Quick Lock <sup>®</sup> termination
Shielding	Unshielded
Number of contacts	5
Locking type	PushPull
Pack contents	incl. plastic housing and female insert

### Technical characteristics

Conductor cross-section	0.25 ... 1.5 mm <sup>2</sup>
Conductor cross-section	AWG 24 ... AWG 16
Rated current	16 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Limiting temperature	-40 ... +70 °C
Mating cycles	≥500



Pushing Performance

## Technical characteristics

Degree of protection acc. to IEC 60529	IP65 IP67
Clamping range	6.5 ... 9.5 mm

## Material properties

Material (insert)	Thermoplastic
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material (O-ring)	NBR
Material (cable seal)	TPE
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead Naphthalene

## Specifications and approvals

Specifications	IEC 61076-3-118
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	1
Net weight	25.16 g


### Commercial data

Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440101 Rectangular connectors (set)

### Current carrying capacity


The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

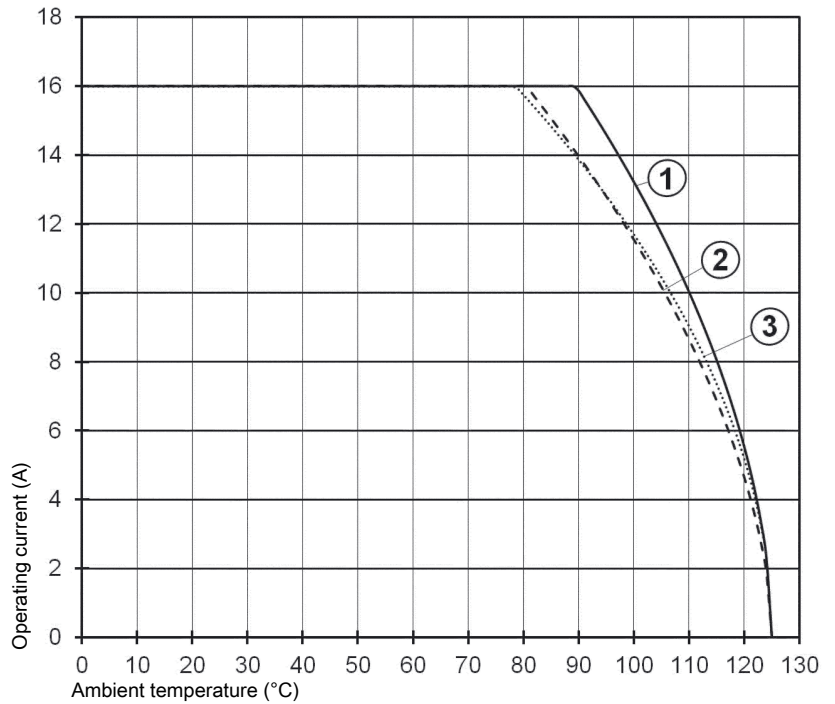

- ① Crimp termination
  - ② Han-Quick Lock<sup>®</sup> termination
  - ③ Solder termination
- Conductor cross-section 2.5 mm<sup>2</sup>

### Mating face



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [829992-1](#) [902-77-02113](#) [129-1J](#) [AN0024023](#) [E6374G1](#)  
[e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-](#)  
[S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#)  
[KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#) [29652](#) [1646905-1](#) [1648320-1](#) [1648582-1](#) [1650195-2](#)