

## Han PP Power L plug fix coding



Image is for illustration purposes only. Please refer to product description.

Part number	09 35 431 0421
Specification	Han PP Power L plug fix coding
HARTING eCatalogue	<a href="https://b2b.harting.com/09354310421">https://b2b.harting.com/09354310421</a>

### Identification

Category	Connectors
Series	Han® PushPull (V14)
Identification	Power L
Element	Connector sets
Specification	AIDA compliant With fixed coding Finger safe
Features	Intuitive locking mechanism field assembly without tools

### Version

Termination method	Spring clamp termination
Shielding	Unshielded
Number of contacts	5
Locking type	PushPull
Pack contents	incl. plastic housing and female insert

### Technical characteristics

Conductor cross-section	0.75 ... 2.5 mm <sup>2</sup>
Conductor cross-section	AWG 18 ... AWG 13
Rated current	16 A
Rated voltage	24 V
Rated impulse voltage	4 kV
Pollution degree	3



## Technical characteristics

Stripping length	10 mm Conductors 44 mm cable jacket
Tightening torque	3 Nm
Limiting temperature	-40 ... +70 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67
Cable diameter	9 ... 13 mm

## Material properties

Material (contacts)	Copper alloy
Surface (contacts)	Au over Ni Mating side Sn over Ni Termination side
Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

## Specifications and approvals

Specifications	IEC 61076-3-117 Variant 14 (V14)
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079 UL 1059 XCFR2.E314677 CSA-C22.2 No. 158-10 XCFR8.E314677
PROFINET	Yes

## Commercial data

Packaging size	1
Net weight	43.5 g
Country of origin	Germany



Pushing Performance

## Commercial data


European customs tariff number 85366990

eCl@ss 27440101 Rectangular connectors (set)

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

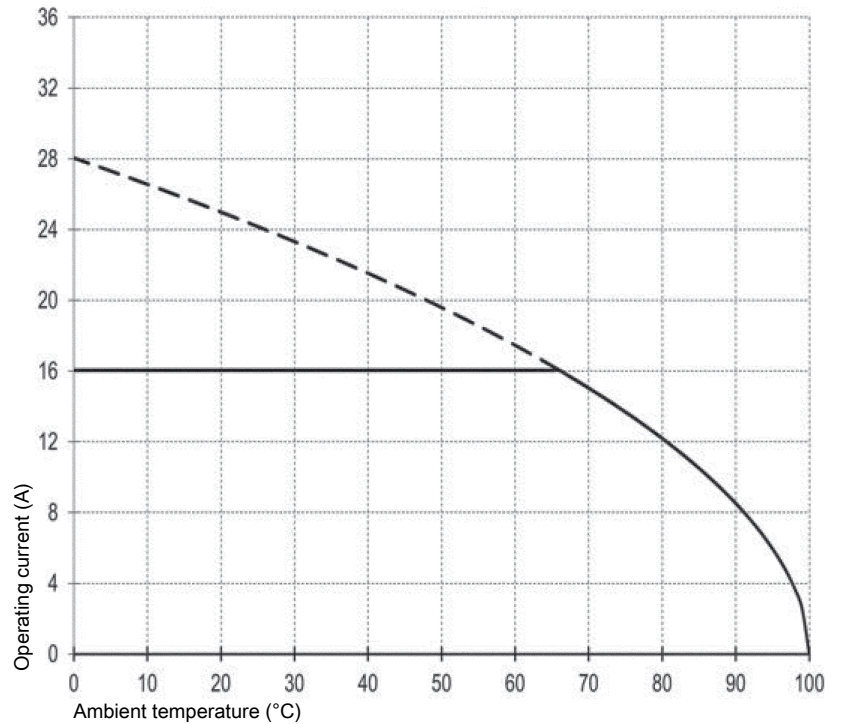

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [829992-1](#) [902-77-02113](#) [129-1J](#) [AN0024023](#) [E6374G1](#)  
[e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-](#)  
[S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#)  
[KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#) [29652](#) [1646905-1](#) [1648320-1](#) [1648582-1](#) [1650195-2](#)