

## Han PushPull Power L Metal PFT var cod

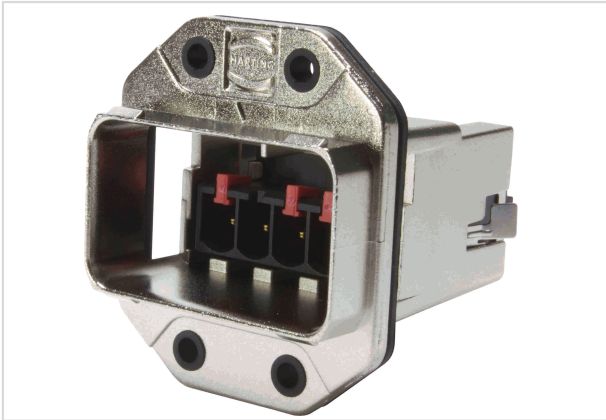


Image is for illustration purposes only. Please refer to product description.

Part number	09 35 434 0311
Specification	Han PushPull Power L Metal PFT var cod
HARTING eCatalogue	<a href="https://b2b.harting.com/09354340311">https://b2b.harting.com/09354340311</a>

### Identification

Category	Connectors
Series	Han® PushPull (V14)
Identification	Power L
Element	Panel feed trough set
Specification	AIDA compliant With variable coding
Features	Intuitive locking mechanism field assembly without tools

### Version

Termination method	Spring clamp termination
Shielding	Unshielded
Number of contacts	5
Locking type	PushPull
Pack contents	incl. bulkhead mounted housing and male insert

### Technical characteristics

Conductor cross-section	0.75 ... 2.5 mm <sup>2</sup>
Conductor cross-section	AWG 18 ... AWG 13
Rated current	16 A
Rated voltage	24 V
Rated impulse voltage	1.5 kV
Pollution degree	3



Pushing Performance

## Technical characteristics

Stripping length	10 mm Conductors 44 mm cable jacket
Tightening torque	3 Nm
Limiting temperature	-40 ... +70 °C
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 IP67
Vibration resistance	10-150 Hz, 5 g, 0.35 mm, 10 sweep cycles acc. to IEC 61373 Category 1 Class B
Shock resistance	30 g / 11 ms, 3 shocks / axis and direction

## Material properties

Material (insert)	Polyamide (PA)
Material (contacts)	Copper alloy
Surface (contacts)	Au over Ni Mating side Sn over Ni Termination side
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead Naphthalene

## Specifications and approvals

Specifications	IEC PAS 61076-3-126
Approvals	DNV GL



Pushing Performance

## Specifications and approvals


UL / CSA	UL 1059 XCFR2.E314677 CSA-C22.2 No. 158-10 XCFR8.E314677
PROFINET	Yes

## Commercial data

Packaging size	1
Net weight	55.8 g
Country of origin	China
European customs tariff number	85366990
eCl@ss	27440101 Rectangular connectors (set)

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.  
 Measuring and testing techniques acc. to IEC 60512-5-2

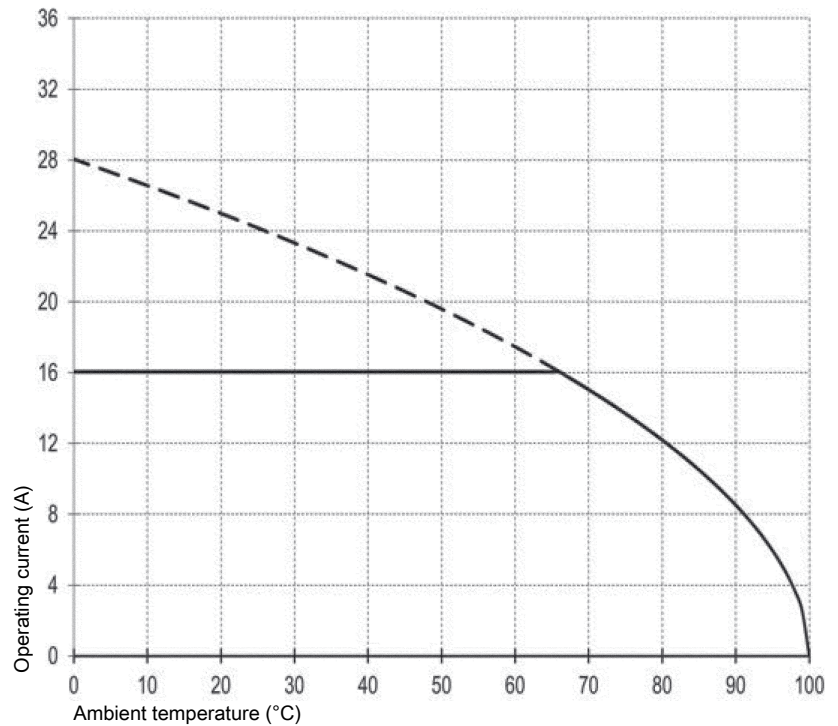

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [6651788-1](#)  
[696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [73080254296](#) [73080255059](#) [73080965046](#) [765-15-0080A](#)  
[765-16-0080B](#) [765-18-0080D](#) [902-77-02113](#) [PS00/A0620/6300](#) [1221200000](#) [129-1J](#) [1409400](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#) [MS3117-](#)  
[14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-](#)  
[C240-M40B](#) [1926015-1](#) [NLS-N-W-C240-M40B](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#) [9300480317](#) [29131](#) [294-0091-01100](#) [296-0040-01100](#)