

## Han 24Ex-M-s

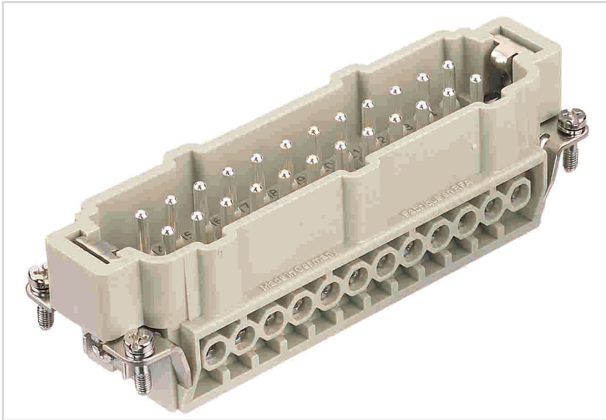


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 36 024 2601  |
| Specification      | Han 24Ex-M-s  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09360242601">https://b2b.harting.com/09360242601</a> |

### Identification

|          |                     |
|----------|---------------------|
| Category | Inserts             |
| Series   | Han <sup>®</sup> Ex |

### Version

|                    |   |
|--------------------|---|
| Termination method | Screw termination   |
| Gender             | Male  |
| Size               | 24 B  |
| Number of contacts | 24  |
| PE contact         | Yes   |
| Details            | ATTENTION! Only to be used with Han <sup>®</sup> Ex hoods and housings! |

### Technical characteristics

|                         |                              |
|-------------------------|------------------------------|
| Conductor cross-section | 0.75 ... 2.5 mm <sup>2</sup> |
| Rated current           | 16 A                         |
| Rated voltage           | 90 V                         |
| Insulation resistance   | >10 <sup>10</sup> Ω          |
| Contact resistance      | ≤1 mΩ                        |
| Tightening torque       | 0.5 Nm                       |
| Limiting temperature    | -20 ... +40 °C               |
| Mating cycles           | ≥500                         |

### Material properties

|                   |                    |
|-------------------|--------------------|
| Material (insert) | Polycarbonate (PC) |
|-------------------|--------------------|



Pushing Performance

## Material properties

|   |  |
|---|--|
| Colour (insert)                           | RAL 7032 (pebble grey)                                 |
| Material (contacts)                       | Copper alloy   |
| Surface (contacts)                        | Silver plated  |
| Material flammability class acc. to UL 94 | V-0  |
| RoHS                                      | compliant with exemption                               |
| RoHS exemptions                           | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status                                | compliant with exemption                               |
| China RoHS                                | 50   |
| REACH Annex XVII substances               | No   |
| REACH ANNEX XIV substances                | No   |
| REACH SVHC substances                     | Yes  |
| REACH SVHC substances                     | Lead   |
| California Proposition 65 substances      | Yes  |
| California Proposition 65 substances      | Nickel<br>Lead   |

## Commercial data

|                                |   |
|--------------------------------|---|
| Packaging size                 | 1   |
| Net weight                     | 115 g   |
| Country of origin              | Germany   |
| European customs tariff number | 85389099  |
| eCl@ss                         | 27440205 Contact insert for industrial connectors |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)