

## Ha-Vis EtherRail 4xAWG22/7 bk CAT5 100m

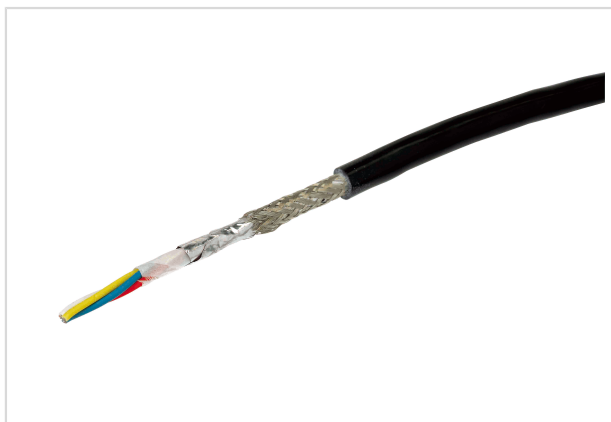


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 600 0108
Specification	Ha-Vis EtherRail 4xAWG22/7 bk CAT5 100m
HARTING eCatalogue	<a href="https://b2b.harting.com/09456000108">https://b2b.harting.com/09456000108</a>

### Identification

Category	System cabling
Element	Bulk cables
Specification	Not assembled
Type of cable	Copper cable (round)
Description of the cable	for railway applications

### Version

Cable length	100 m
Number of cores	4
Core structure	4x AWG 22/7

### Technical characteristics

Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	10 Mbit/s 100 Mbit/s
Limiting temperature	-40 ... +85 °C unmoved -25 ... +70 °C moved
Cable diameter	6.6 mm ± 0.2 mm
Minimum bending radius	6x Cable diameter
Test voltage $U_{r.m.s.}$	1 kV Wire / wire / shielding
Coupling attenuation @ 20 °C / 100 MHz	8 mΩ/m
Conductor resistance @ 20 °C	≤54.4 Ω/km
Insulation resistance @ 20 °C	≥5,000 MΩ x km
Signal run time @ 20 °C	≤4.4 ns/m



Pushing Performance

## Technical characteristics

Impedance @ 100 MHz	100 Ω ±5 %
---------------------	------------

## Material properties

Material (cable)	Polyolefin copolymer electron beam crosslinked Comp 752
Colour (cable)	Black
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No
California Proposition 65 substances	Yes
California Proposition 65 substances	Antimony trioxide

## Specifications and approvals

Specifications	EN 45545-2 (HL 1-3) fire protection in railway vehicles
	EN 50264-1 fire protection in railway vehicles
	EN 50306-1 fire protection in railway vehicles
	NFPA 130 fire protection in railway vehicles
	UN/ECE-R 118 fire protection for rolling stock
	EN 50306-4 Resistance to ozone
	EN 60811-504 High low temperature resistance
	EN 60811-404 High oil resistance
	EN 60811-404 High fuel resistance
	EN 60811-404 Alkali resistance
	EN 60811-404 Acid resistance
	DIN 51900 Low fire load
	EN 50618 UV resistant

## Commercial data

Packaging size	1
Net weight	6,200 g
Net weight	61 g/m
Country of origin	Switzerland
European customs tariff number	85444995
eCl@ss	27061801 Data and communication cable (copper)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHJ-4P4C-1-V-4](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [MRJR-5481-0F2](#) [E5288-S000K3-L](#) [E5908-15A242-L](#) [155302-001](#) [AX100653](#)