


HARTING PROFINET Type B Outdoor Cable 4-wire Cat. 5 PVC



PROFINET Type B Outdoor cable 4-wire, Cat. 5, PVC

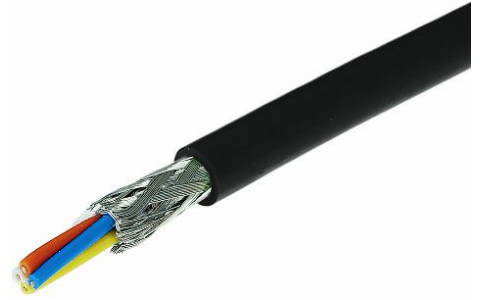

Advantages

- Suitable for PROFINET cabling Category 5 / Class D according to ISO/IEC 11801 respectively EN 50173-1 and ISO/IEC 24702 respectively EN 50173-3
- Capable for outdoor installation
- Applicable for industrial premises
- RoHS conform, UL listed, flame retardant

General

This data cable is suitable for PROFINET cabling according to type B in industrial premises and areas. It is useable for flexible cords. The core is fitted with 4 wires twisted to quad that allows the transmission of Fast Ethernet 10/100Mbit/s. It is designed for fast assembling with the easy-stripping tool and can be assembled with all HARTING 4-pole RJ45 connectors.

Identification

PROFINET Type B Outdoor Cable
4-wire, Cat. 5, PVC

20 m	ring
50 m	ring
100 m	ring
500 m	reel

Part number

09 45 600 0135
09 45 600 0145
09 45 600 0105
09 45 600 0115

Drawing



- Wire: Stranded tinned copper AWG22/7
- Insulation: : PE Ø 1.56 mm (+/-0.03)
- Inner sheath: Polyvinylchloride (PVC)
- Overall screen: Aluminate foil overlapped, tinned copper wire braid, braid coverage about 85 %
- Outer sheath: Polyvinylchloride (PVC), flame retardant

Color code: wh, ye, bu, or
 Color of inner sheath: white
 Color of outer sheath: black, RAL 9005
 Overall diameter: 6.3 mm – 6.7 mm

Technical Characteristics

Performance Category 5 according to EN 50288-2-1:2003, IEC 61156-5:2002

Mechanical Characteristics

Minimal bending radius Repeated bending: 5 x diameter
Single bending: 3 x diameter
Torsional strength +/-180° on 1 m, 10,000 cycles

Electrical Characteristics at 20 °C

Transfer impedance at 10 MHz 20 mOhm/m
Conductor resistance max. 120 Ohm/km
Insulation resistance min. 500 MOhm x km
Velocity of propagation 5.3 ns/m
Characteristic impedance at 100 MHz 100 Ohm +/- 5 Ohm
Test voltage (wire/wire/screen rms 50 Hz 1 min) 2000 V

Chemical Characteristics

Flame retardant UL 1685 (CSA FT 4)
Free of hazardous substances RoHS 2002/95/EG
Sunlight resistant UL 1581 Sec.1200, UL-Style 21695

Thermal Characteristics

Permissible temperature range
fixed operation - 40 °C to + 70 °C
flexible operation - 20 °C to + 60 °C

Printing

HARTING INDUSTRIAL ETHERNET STRANDED CABLE CAT 5 PLUS * UV protected * 22AWG (SHIELDED) (UL) E333432 CMG or PLTC or AWM 21695 80°C 600V FT4 SUN RES * 094560001020300 "sequential length in metres" * "year/internal order number" * "HARTING-LOGO"

Weight about

68 kg/km

Technical Characteristics

Frequency MHz	Attenuation dB/100m		NEXT dB	
	typ.	Cat 5 max*	typ.	Cat 5 min*
1	2.1	2.1	80	80
4	4	4	76	76
10	6.3	6.3	70	70
16	8	8	65	65
20	9	9	63	63
31.25	11.4	11.4	60	60
62.5	16.5	16.5	55	55
100	21.3	21.3	50	50

* EN 50288-2-1:2003

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [003201-000](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-](#)
[0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-](#)
[U1000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-](#)
[9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [706/2R-BLACK-EACH](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#)
[768146-000](#) [773159-000](#) [7934A-BLK-1000](#) [8125-CHR-100](#) [8164-CHR-1000](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-](#)
[1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#) [83006-DK-GRN-100](#)