

Ha-Vis EtherRail 4x2xAWG24/7 CAT7 100m

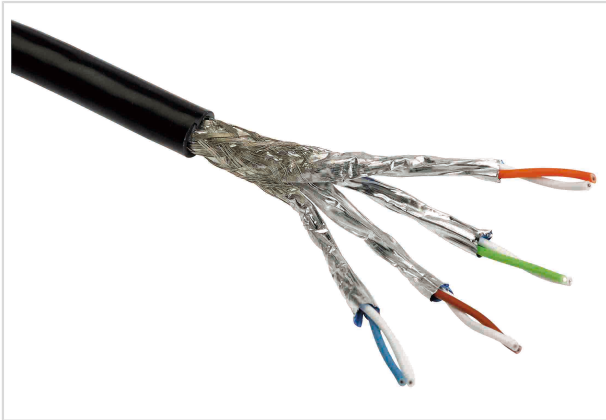


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 45 600 0692 |
| Specification | Ha-Vis EtherRail 4x2xAWG24/7 CAT7 100m |
| HARTING eCatalogue | https://b2b.harting.com/09456000692 |

Identification

| | |
|--------------------------|--------------------------|
| Category | System cabling |
| Element | Bulk cables |
| Specification | Not assembled |
| Type of cable | Copper cable (round) |
| Description of the cable | for railway applications |

Version

| | |
|-----------------|----------------|
| Cable length | 100 m |
| Number of cores | 8 |
| Core structure | 4x 2x AWG 24/7 |

Technical characteristics

| | |
|--|------------------------------|
| Transmission characteristics | Cat. 7 Class F up to 600 MHz |
| Data rate | 10 Mbit/s |
| | 100 Mbit/s |
| | 1 Gbit/s |
| | 2.5 Gbit/s |
| | 5 Gbit/s |
| | 10 Gbit/s |
| Limiting temperature | -40 ... +80 °C unmoved |
| | -25 ... +70 °C moved |
| Cable diameter | 8.1 mm ± 0.3 mm |
| Minimum bending radius | 6x Cable diameter |
| Test voltage $U_{r.m.s.}$ | 1 kV Wire / wire / shielding |
| Coupling attenuation @ 20 °C / 100 MHz | 5 mΩ/m |



Pushing Performance

Technical characteristics

| | |
|-------------------------------|----------------|
| Conductor resistance @ 20 °C | ≤84 Ω/km |
| Insulation resistance @ 20 °C | ≥5,000 MΩ x km |
| Signal run time @ 20 °C | ≤4.4 ns/m |
| Impedance @ 100 MHz | 100 Ω ±5 % |

Material properties

| | |
|-----------------------------|---|
| Material (cable) | Polyolefin copolymer electron beam crosslinked Comp 752 |
| Colour (cable) | Black |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

Specifications and approvals

| | |
|-----------------------|---|
| Specifications | EN 45545-2 (HL 1-3) fire protection in railway vehicles |
| | EN 50264-1 fire protection in railway vehicles |
| | EN 50306-1 fire protection in railway vehicles |
| | NFPA 130 fire protection in railway vehicles |
| | UN/ECE-R 118 fire protection for rolling stock |
| | EN 50306-4 Resistance to ozone |
| | EN 60811-504 High low temperature resistance |
| | EN 60811-404 High oil resistance |
| | EN 60811-404 High fuel resistance |
| | EN 60811-404 Alkali resistance |
| | EN 60811-404 Acid resistance |
| | DIN 51900 Low fire load |
| EN 50618 UV resistant | |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Net weight | 7,300 g |
| Net weight | 75 g/m |
| Country of origin | Switzerland |
| European customs tariff number | 85444290 |
| eCl@ss | 27061801 Data and communication cable (copper) |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [003201-000](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-](#)
[0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-](#)
[U1000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-](#)
[9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [706/2R-BLACK-EACH](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#)
[768146-000](#) [773159-000](#) [7934A-BLK-1000](#) [8125-CHR-100](#) [8164-CHR-1000](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-](#)
[1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#) [83006-DK-GRN-100](#)