


Printed board layout (1,6±0,2 thick)
view component side
(PCB plating =Tin)

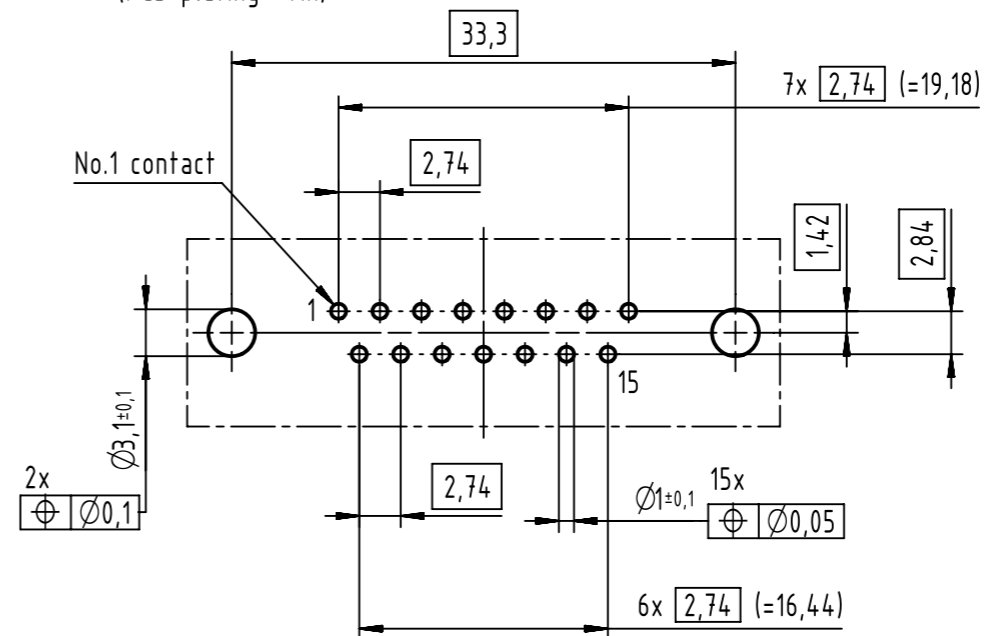

Mounting force on Printed board: 25-80 N

| Part number | Performance level | nut thread |
|---------------|-------------------|------------|
| 0966 263 7813 | AU3 | 4-40 UNC |
| 0966 263 6813 | AU2 | 4-40 UNC |
| 0966 263 5813 | 0,76µm AU | 4-40 UNC |

| | | | | | |
|---|--|-----------------------|---|-----------------------------|--------------------|
| | All Dimensions in mm Original Size DIN A3 | Scale 2:1 | Free size tol. | Ref. | |
| | All rights reserved Department EC PD - CN | Created by ZHUANGJ | Inspected by LUOK | Standardisation HOFFMANN | Date 2015-10-27 |
| HARTING Electronics GmbH D-32339 Espelkamp | Title D-Sub STD 15-pole male 2,84mm pitch with screw lock | | | State Final Release | |
| | Type TB | Number 0966263X813 | Doc-Key / ECM-Nr. 100643736/UGD/000/A 50000095926 | | Page 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#) [012-0467-000](#)
[012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6E14SA7SC](#)
[CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#)
[6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#) [747552-3](#) [MD1-21PS](#)
[MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-](#)
[7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#)
[GDAY15PB](#) [980-0000-170](#) [980-0000-171](#)