


Number of contacts

9-50

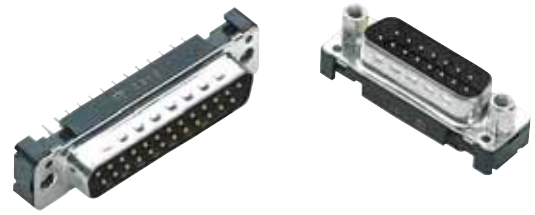


Turned solder pins, straight without grounding-pins


| Identification | No. of contacts | Part No. | |
|---|-----------------|-------------------------------|-------------------------------|
| Performance levels Explanations see page 05.04 Other performance levels on request | | Performance level 3 | Performance level 2 |
| Male connector metal shell with dimples | | | |
| | 9 | 09 66 121 770 . | 09 66 121 670 . |
| | 15 | 09 66 221 770 . | 09 66 221 670 . |
| | 25 | 09 66 321 770 . | 09 66 321 670 . |
| | 37 | 09 66 421 770 . | 09 66 421 670 . |
| | 50 | 09 66 521 770 . | 09 66 521 670 . |
| Please insert digit for flange thread or fitted female screw locks | | | |
| M3 ▶ 1 4-40 UNC ▶ 2 fitted screw locks 4-40 UNC ▶ 3 | | | |

D-Sub

Male connector

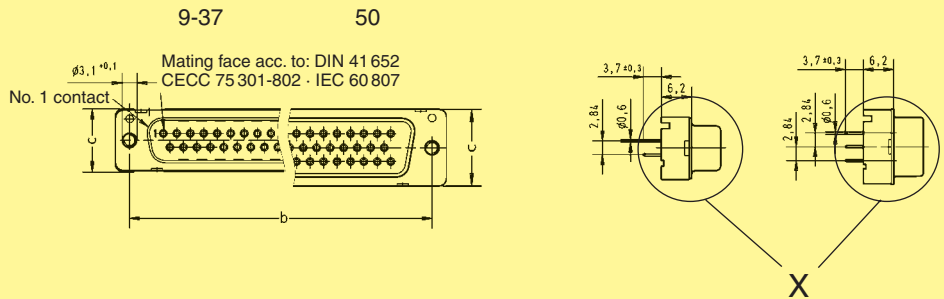

Board drillings

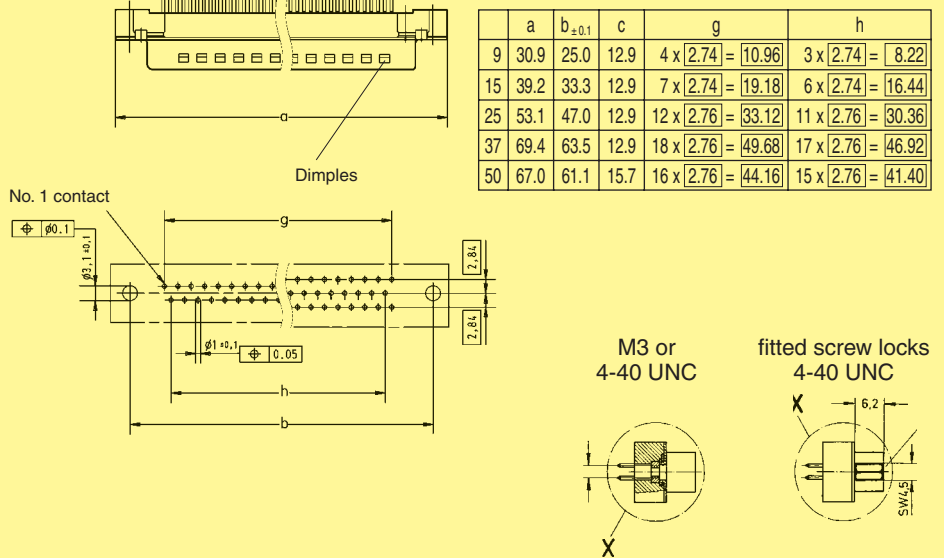

Dimensions in mm

Mating conditions see page 05.04

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#) [012-0467-000](#)
[012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6E14SA7SC](#)
[CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#)
[6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#) [747552-3](#) [MD1-21PS](#)
[MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-](#)
[7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#)
[GDAY15PB](#) [980-0000-170](#) [980-0000-171](#)