



in duplex style for short range transmission with optical fibres ($\lambda = 660 \text{ nm}$)

Description

- Electro-optical converters integrated into D-Sub connector shell housings
- Cost-effective solution for fibre optic duplex links
- Transmission distance up to 60 m
- Standard accessories for D-Sub can be applied
- Suitable for 1 mm \varnothing polymer optical fibres ($\lambda = 660 \text{ nm}$)
- Special housing for heavy duty applications is available

Technical characteristics

General data at $T = 25 \text{ }^\circ\text{C}$


	LED	Receiver
Operating voltage		5 V DC $\pm 5 \%$
Drive current (max.)	70 mA	
Optical power	300 μW (at 20 mA) 600 μW (at 50 mA)	
Dynamic range		4 μW ... 80 μW
Wave-length	660 nm	
Transmission rate		TTL, 5 MBit/s
Storage temp.	-35 ... +100 $^\circ\text{C}$	-55 ... +100 $^\circ\text{C}$
Operating temp.	-30 ... +85 $^\circ\text{C}$	-40 ... +85 $^\circ\text{C}$

Identification Part No. Drawing Dimensions in mm

F.O. D-Sub T/E female connector


angled

20 66 009 3811

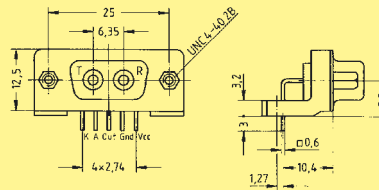

straight


20 66 009 3812

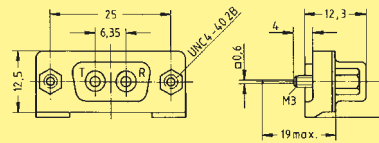

(Outer dimensions like 9-pin D-Sub female)

F.O. D-Sub male connector

20 67 009 3811

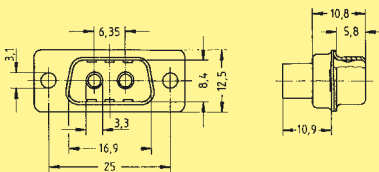


(Outer dimensions like 9-pin D-Sub male)

Cavities are designed for HARTING POF¹⁾ ferrules.

Ferrule

1 mm POF¹⁾ with cladding gauge 2.2 mm

20 10 001 3232

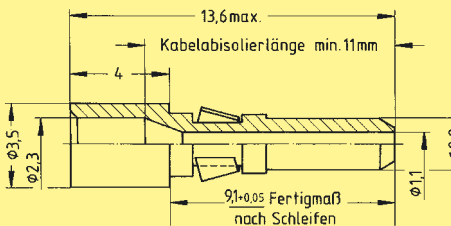

The mounting/enface-preparation of the ferrule can be achieved by crimping, hot-plate technique or by using adhesive.

The ferrules are snap-mounted into the male connector and can be released with aid of removal tool 09 99 000 0052 (see catalogue "Heavy Duty Connectors Han[®]").

¹⁾ POF = Polymer-Optical Fibre

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#) [012-0467-000](#)
[012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6E14SA7SC](#)
[CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#)
[6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#) [747552-3](#) [MD1-21PS](#)
[MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-](#)
[7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#)
[GDAY15PB](#) [980-0000-170](#) [980-0000-171](#)