



in duplex style for short range transmission with optical fibres ($\lambda = 660 \text{ nm}$)

Description

- Electro-optical converters integrated into D-Sub connector shell housings
- Cost-effective solution for fibre optic duplex links
- Transmission distance up to 60 m
- Standard accessories for D-Sub can be applied
- Suitable for 1 mm \varnothing polymer optical fibres ($\lambda = 660 \text{ nm}$)
- Special housing for heavy duty applications is available

Technical characteristics

General data at $T = 25 \text{ }^\circ\text{C}$


	LED	Receiver
Operating voltage		5 V DC $\pm 5 \%$
Drive current (max.)	70 mA	
Optical power	300 μW (at 20 mA) 600 μW (at 50 mA)	
Dynamic range		4 μW ... 80 μW
Wave-length	660 nm	
Transmission rate		TTL, 5 MBit/s
Storage temp.	-35 ... +100 $^\circ\text{C}$	-55 ... +100 $^\circ\text{C}$
Operating temp.	-30 ... +85 $^\circ\text{C}$	-40 ... +85 $^\circ\text{C}$

Identification Part No. Drawing Dimensions in mm

F.O. D-Sub T/E female connector


angled

20 66 009 3811

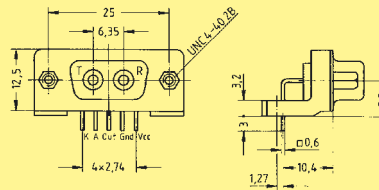

straight


20 66 009 3812

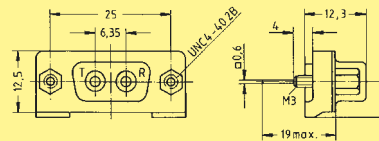

(Outer dimensions like 9-pin D-Sub female)

F.O. D-Sub male connector

20 67 009 3811

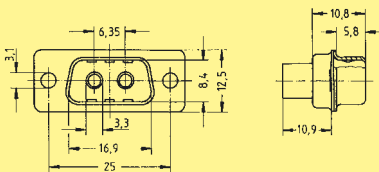


(Outer dimensions like 9-pin D-Sub male)

Cavities are designed for HARTING POF¹⁾ ferrules.

Ferrule

1 mm POF¹⁾ with cladding gauge 2.2 mm

20 10 001 3232

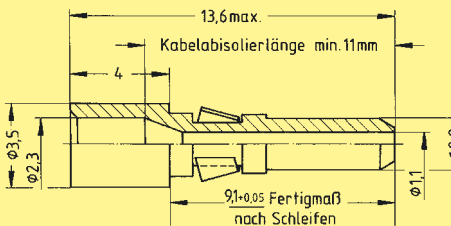

The mounting/enface-preparation of the ferrule can be achieved by crimping, hot-plate technique or by using adhesive.

The ferrules are snap-mounted into the male connector and can be released with aid of removal tool 09 99 000 0052 (see catalogue "Heavy Duty Connectors Han[®]").

¹⁾ POF = Polymer-Optical Fibre

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#)
[9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX101713](#)
[AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [17-300800](#) [181-011-126](#)
[181-011-S](#) [181-057-126](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F16-10S](#) [9440F20-18S](#)
[9444W32-73S](#) [9446F16-10S-190](#) [953-106-50231](#) [953-120-5003](#) [955-120-5110](#)