

Ethernet Switch
IP 30



Advantages

- Flat housing format
- Robust metal housing
- Adapted for mounting onto top hat mounting rail 35 mm according to EN 60 715
- RoHS compliant

General Description

The Ethernet Switch HARTING Ha-VIS eCon 2160-A can be used in industrial environments and supports Ethernet (10 Mbit/s) and Fast Ethernet (100 Mbit/s). Up to 16 Ethernet devices can be connected via the RJ45-ports.

The Ethernet Switch supports a simple and quickly network diagnostics with integrated LEDs at every port. It works as unmanaged switch in the Store and Forward switching mode and supports Auto-crossing, Auto-negotiation and Auto-polarity.

Identification

Part number


Drawing

Dimensions in mm

HARTING Ha-VIS
eCon 2160-A

Ethernet Switch with
16 ports RJ45

20 76 116 3000

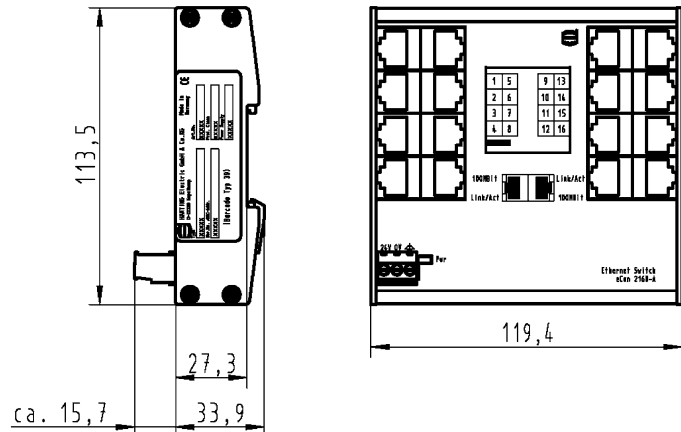

All data represent the current state of development at the time of print and are therefore non-binding.

HARTING reserves the right to modify designs without prior notice.

Technical characteristics

Features

- Auto-crossing
- Auto-negotiation
- Auto-polarity
- Store and Forward switching mode

Ethernet Interface

Number of ports	• 16x 10/100Base-TX, unmanaged
Cable types acc. to IEEE 802.3	• Shielded Twisted Pair (STP) or Unshielded Twisted Pair (UTP), Category 5
Data rate	• 10/100Mbit/s (RJ45)
Maximum cable length	• 100 m (Twisted Pair; with cable Category 5 acc. to EN 50 173-1)
Terminating method	• RJ45 (Twisted Pair)
Diagnostics (via LED)	• Status Link - green • Status Data transfer (Act) - green flashing • Data transfer rate (Speed) - 100 Mbit/s: yellow / 10 Mbit/s: OFF
Topology	Line, Star or mixed

Power Supply

Power supply	24 V DC
Permissible range	12 V ... 48 V
Current consumption	100 mA (at 24 V DC)
Diagnostics (via LED)	Power supply
Terminating Power supply	3-pole pluggable contact (+24 V DC / 0 V / FE)

Design features

Material of housing	Aluminium
Dimensions (W x H x D)	119.4 x 113.5 x 27.3 mm mm (without connectors)
Degree of protection acc. to DIN 60 529	IP 30

Environmental conditions

Operating temperature	-10 °C ... +70 °C
Storage temperature	-40 °C ... +85 °C
Relative humidity	10 % ... 95 % (non-condensing)

Approvals

cUL	(in preparation)
-----	------------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [FC6A-PH1](#) [W4S105C](#) [GX-ID1611](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [854-19722](#) [808-38157](#) [7506GX2](#) [105FX-SC-MDR](#) [110FX2-SC](#) [BCM54291B0IQLEG](#) [750-494](#) [750-495](#) [750-643](#) [750-940](#) [852-1322](#) [852-1328](#) [852-1605](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [WEBSENS COMBO](#) [USR-TCP232-T2](#) [2014120](#) [2017008](#) [2018108](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-4FP-AE](#) [2352903-2](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [1005957](#) [1006191](#) [304TX-N](#) [WIZ107SR_TTL](#) [ES-320](#) [TDKEZW5](#) [2003025](#) [2003037](#) [2013040](#)