

M12 Power IDC male L-coded w/o FE



Image is for illustration purposes only. Please refer to product description.

Part number	21 03 296 1506
Specification	M12 Power IDC male L-coded w/o FE
HARTING eCatalogue	https://b2b.harting.com/21032961506

Identification

Category	Connectors
Series	Circular connectors M12
Identification	Power
Element	Cable connector
Specification	Straight

Version

Termination method	HARAX [®] connection technology
Gender	Male
Shielding	Shielded
Number of contacts	4
Coding	L-coding
Locking type	Screw locking

Technical characteristics

Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16
Rated current	12 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Overvoltage category	III
Insulation resistance	>10 ⁸ Ω



Pushing Performance

Technical characteristics

Contact resistance	≤10 mΩ
Tightening torque	0.6 Nm
Wrench size (knurled screw / knurled nut)	17
Ambient temperature	-40 ... +85 °C
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 / IP67 mated condition
Cable diameter	5.8 ... 13.5 mm
Isolation group	I (600 ≤ CTI)

Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	Black
Material (contacts)	Copper alloy
Surface (contacts)	Au over Ni Mating side
Material (hood/housing)	Zinc die-cast
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

Specifications and approvals

Specifications	IEC 61076-2-111
PROFINET	Yes

Commercial data

Packaging size	1
Net weight	84.7 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440102 Circular connector (for field assembly)




Pushing Performance

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

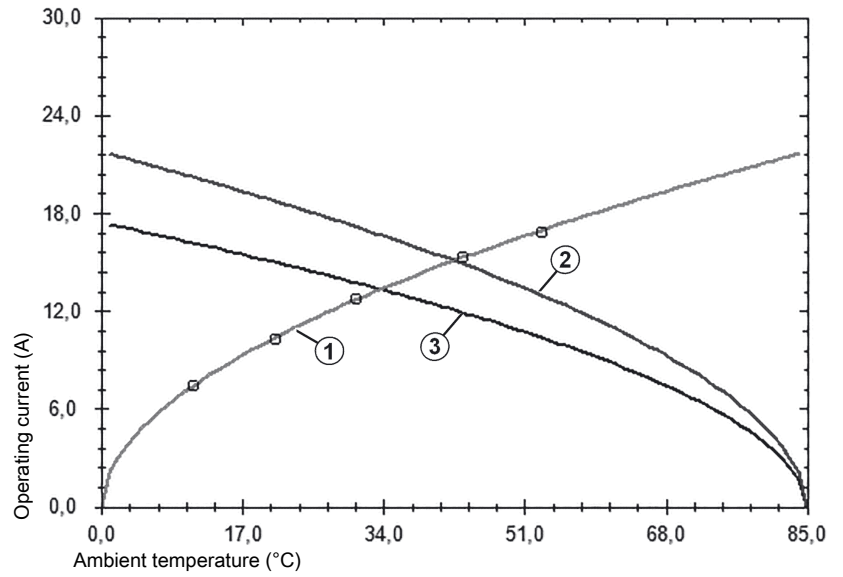

- ① Heating
 - ② Derating curve
 - ③ Derating curve 80%
- Conductor cross-section 1.5 mm²

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#) [41-40011](#) [42-00006](#)
[42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#)
[XS3P-M421-2](#) [600X518050X](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-](#)
[16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#) [860RD04-213R004](#) [1-213245-2](#)