

## M12 Power IDC female L-code/d



Image is for illustration purposes only. Please refer to product description.

Part number	21 03 296 2505
Specification	M12 Power IDC female L-code/d
HARTING eCatalogue	<a href="https://b2b.harting.com/21032962505">https://b2b.harting.com/21032962505</a>

### Identification

Category	Connectors
Series	Circular connectors M12
Identification	Power
Element	Cable connector
Specification	Straight

### Version

Termination method	HARAX <sup>®</sup> connection technology
Gender	Female
Shielding	Shielded
Number of contacts	4
FE contact	Yes
Coding	L-coding
Locking type	Screw locking

### Technical characteristics

Conductor cross-section	0.75 ... 1.5 mm <sup>2</sup>
Conductor cross-section	AWG 18 ... AWG 16
Rated current	12 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Overvoltage category	III



Pushing Performance

## Technical characteristics

Insulation resistance	>10 <sup>8</sup> Ω
Contact resistance	≤10 mΩ
Tightening torque	0.6 Nm
Wrench size (knurled screw / knurled nut)	17
Ambient temperature	-40 ... +85 °C
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 / IP67 mated condition
Cable diameter	5.8 ... 13.5 mm
Isolation group	I (600 ≤ CTI)

## Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	Grey
Material (contacts)	Copper alloy
Surface (contacts)	Au over Ni Mating side
Material (hood/housing)	Zinc die-cast
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead Naphthalene

## Specifications and approvals

Specifications	IEC 61076-2-111
PROFINET	Yes

## Commercial data

Packaging size	1
Net weight	95 g


## Commercial data

Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440102 Circular connector (for field assembly)

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

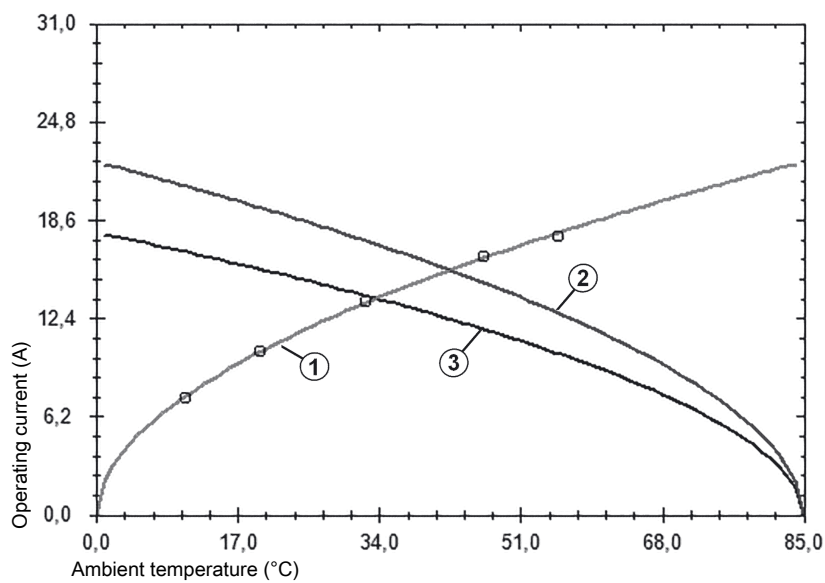

- ① Heating
  - ② Derating curve
  - ③ Derating curve 80%
- Conductor cross-section 1.5 mm<sup>2</sup>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#) [41-40011](#) [42-00006](#)  
[42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#)  
[XS3P-M421-2](#) [600X518050X](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-](#)  
[16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#) [860RD04-213R004](#) [1-213245-2](#)