



schematic diagram

1		Litze braun (+) / flexible conductor brown (+)
2		Litze weiss (Ö) / flexible conductor white (0)
4		Litze schwarz (S) / flexible conductor black (S)
3		Litze blau (-) / flexible conductor blue (-)

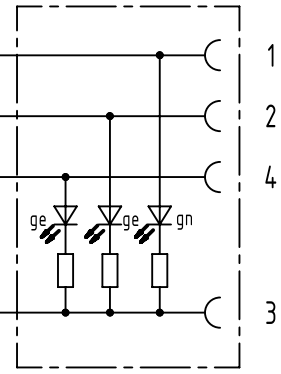

Halogen-free PUR-conductor 4x0,34mm²
black with approval according to UL/CSA

21034157401	0.3m
21034157402	0.6m
21034157403	1.0m
21034157404	1.5m
21034157405	2.0m
part No.	nominal length (L)

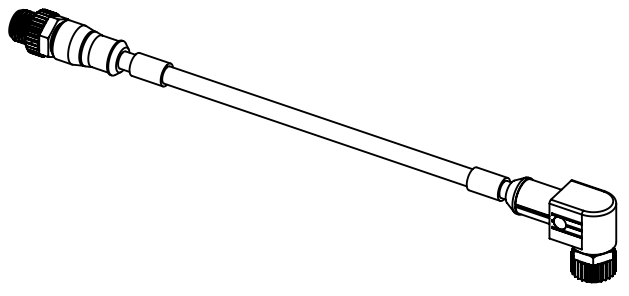

	All Dimensions in mm Original Size DIN A4	Scale 1:1	Free size tol.			Ref.
	All rights reserved Department EC PD - DE	Created by DYCKC	Inspected by WELLMANN	Standardisation HOFFMANN	Date 2013-10-07	State Final Release
HARTING Electronics GmbH D-32339 Espelkamp		Title HARTING M12 male straight/ female angled				Doc-Key / ECM-Nr. 100093116/UGD/007/B 500000066884
		Type TB	Number 21034157400			Rev. B Page 1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Cords](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[172-4000](#) [172-4101](#) [172-7443-E](#) [21033836407](#) [2J-1865A](#) [2R7006A20A120](#) [426055400-3](#) [MN47A4BC01M010](#) [H-OU-2](#) [CA0002](#)
[420680840-3](#) [426451500-3](#) [P162PT4-36](#) [1-832692-4](#) [FJ-VSP 3M](#) [96CB-POWER-B-1.8M2](#) [426040200](#) [CA0006](#) [H-OU-27](#) [1700019464](#) [FJ-](#)
[VSP 10M](#) [MN47B4BC01M040](#) [H-OU-20](#) [2-836917-8](#) [867566-1](#) [804001P03M050G](#) [2050KH1-BK](#) [426013710-3](#) [58257-1069](#) [216603-0037](#)
[1011147](#) [1011324](#) [1012028](#) [862545-5](#) [BXC-10567](#) [172-2555](#) [32102-022800-200-RS](#) [DC.CAB.0201.0150](#) [DC.CAB.0301.0150](#)
[DC.CAB.0610.0150](#) [DC.CAB.0700.0150](#) [DC.CAB.1000.0150](#) [DC.CAB.1000.0300](#) [DC.CAB.1100.0150](#) [DC.CAB.1400.0150](#)
[DC.CAB.1410.0150](#) [DC.CAB.1500.0150](#) [DC.CAB.1811.0150](#) [DC.CAB.1900.0150](#) [DC.CAB.1911.0150](#)