

## PFT male L-coded 2.5mm<sup>2</sup>



Image is for illustration purposes only. Please refer to product description.

Part number	21 03 599 1505
Specification	PFT male L-coded 2.5mm <sup>2</sup>
HARTING eCatalogue	<a href="https://b2b.harting.com/21035991505">https://b2b.harting.com/21035991505</a>

### Identification

Category	Connectors
Series	Circular connectors M12
Identification	Power
Element	Panel feed through
Specification	With conductors for front mounting

### Version

Gender	Male
Shielding	Unshielded
Number of contacts	4
FE contact	Yes
Coding	L-coding
Locking type	Screw locking

### Technical characteristics

Conductor cross-section	2.5 mm <sup>2</sup>
Conductor cross-section	AWG 14
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Overvoltage category	III



Pushing Performance

## Technical characteristics

Insulation resistance	>10 <sup>8</sup> Ω
Contact resistance	≤10 mΩ
Tightening torque	2 Nm Lock nut
Wrench size	17 18
Ambient temperature	-40 ... +85 °C
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 / IP67 mated condition
Isolation group	I (600 ≤ CTI)
Conductor length	30 cm

## Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	Grey
Material (contacts)	Copper alloy
Surface (contacts)	Au over Ni Mating side
Material (hood/housing)	Zinc die-cast
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	0d7d3693-d625-47ab-934a-d241bf72c86e
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead Naphthalene

## Specifications and approvals

Specifications	IEC 61076-2-111
UL / CSA	UL 2238 CYJV2.E302521 CSA-C22.2 No. 182.3 CYJV8.E302521

## Specifications and approvals


PROFINET	Yes
----------	-----

## Commercial data

Packaging size	1
Net weight	58.3 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440103 Sensor-actuator connector chassis (sensor technology acc.)

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature. Measuring and testing techniques acc. to IEC 60512-5-2

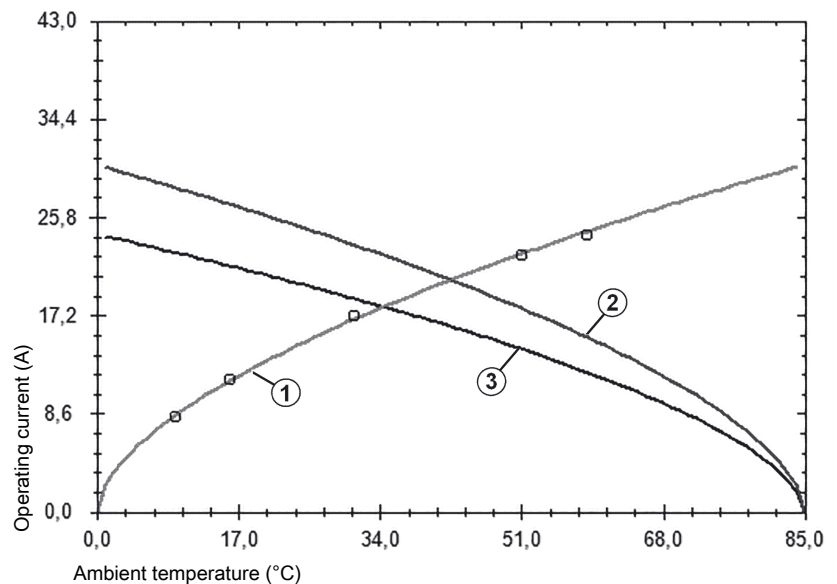

- ① Heating
  - ② Derating curve
  - ③ Derating curve 80%
- Conductor cross-section 2.5 mm<sup>2</sup>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#) [41-40011](#) [42-00006](#)  
[42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#)  
[XS3P-M421-2](#) [600X518050X](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-](#)  
[16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#) [860RD04-213R004](#) [1-213245-2](#)