

Technical Characteristics

Part Number

Han[®] 1A Kit

Hood	Top Entry
Housing	Locking Lever Bulkhead
Material	Polyamide Plastic
Protection Degree	IP65
Temp Rating	-30 to +90C
Cable Gland	Plastic
Cable Diameter	5.7 – 10mm
Insert	3+GND
Screw Terminals	18-14AWG
Wire Strip Length	7.5mm
Mating Cycles	>100
Flammability	V-0

73 10 100 0020





Electrical Characteristics

Rated Current	10amps
Rated Voltage acc. UL	250V
Rated Impulse Voltage	6kV

Drawings and Assembly Information

Dimensions in mm

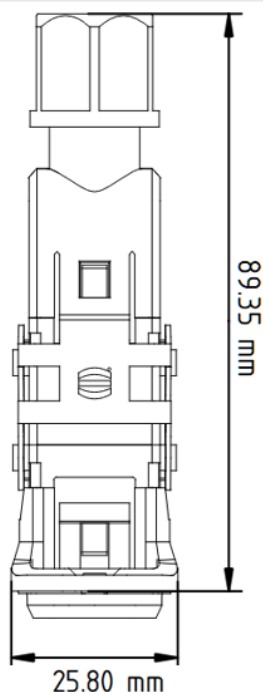

Tooling and Torque Values

Type	Tool	Torque (Nm)
Terminal Screws (M3)	Slotted 0.4 x 2.5	0.25
Mounting Screws (M3 recommended)	-	0.3
Recommended Punch Die	09990000973	-

Kit Contents

Male Insert	09 10 003 2606
Female insert	09 10 003 2706
Housing	09 10 000 0300
Hood & Gland	09 10 000 0400
Lever	09 10 000 5200

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[6646058-2](#) [6646137-1](#) [6646138-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [696475-1](#) [702-32-01109](#) [73080255059](#) [73080965046](#)
[7310205040001](#) [765-16-0080B](#) [765-18-0080D](#) [902-77-02113](#) [PS00/A0620/6300](#) [AN0024023](#) [154-42B7WM250](#) [MS3117-14AC](#) [1643543-1](#)
[1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [1926015-1](#) [NLS-3-BL-C240-M40B](#) [NLS-N-W-C240-](#)
[M40B](#) [NPS-3-BL-T6](#) [2-1589900-8](#) [9300480317](#) [294-0091-01100](#) [296-0040-01100](#) [1-6609148-0](#) [A32595-0049](#) [1766249-1](#) [19000005132](#)
[1926016-1](#) [1-966831-8](#) [AN0024202](#) [AN0264023](#) [279-0841-10100A](#) [281-0334-00100A](#) [RMSB4](#) [419-2083-301](#) [LCDX4/0-14B-X](#) [075-8519-](#)
[001](#) [078238-1613](#) [07.470.3256.0](#) [09000005288](#) [09140240311](#)