


Gecko Screw-Lok Connectors

Male Crimp Contacts – Pre-Crimped Wires

- Ready for assembling to housing.
- Crimp barrel meets all crimp guidelines and standards.
- 2A current capacity, resists high vibration and shock.
- Withstands extremes of temperature: -65°C to +150°C.

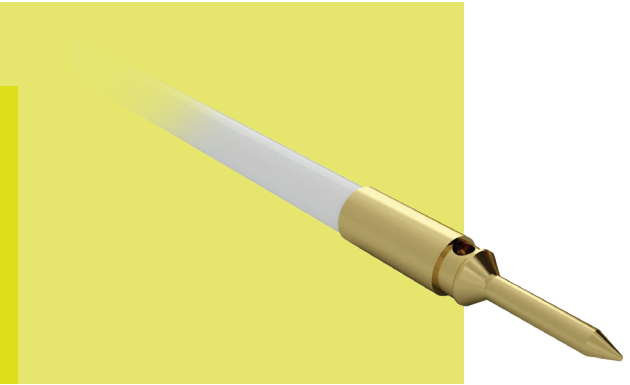

MALE SINGLE ENDED	MALE – MALE
MALE – FEMALE	TOOLS
	<p>Contact Insertion/Removal Tool – Z125-902</p> <ul style="list-style-type: none"> ➤ Male crimp housings and loose contacts shown on previous pages. ➤ Instruction sheets available at www.harwin.com/instructions.

HOW TO ORDER

G125 – M WX XXXX X 94

SERIES CODE	G125	CABLE COLOR	94	White
GENDER – FIRST END	M	TERMINATION – SECOND END	L	Loose cut end
CABLE SIZE	W1	26 AWG	F	Female
	W2	28 AWG	M	Male
	W3	30 AWG		
	W4	32 AWG		
			CABLE LENGTH	
			0150	150mm
			0300	300mm (double-ended)
			0450	450mm (single-ended)

All dimensions in mm.

Patent Published

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialised Cables](#) category:

Click to view products by [Harwin](#) manufacturer:

Other Similar products are found below :

[603PT6](#) [603SS6L](#) [604PT6](#) [604SS6](#) [706000D02F200](#) [910640](#) [1200740077](#) [1200740114](#) [AC172](#) [ACL-SSI-4](#) [R88ACAKA0015SRE](#)
[R88ACAWL005SDE](#) [R88ACRGD0R3C](#) [1300150047](#) [1300660036](#) [1302262116](#) [1300150149](#) [1300220020](#) [1300220104](#) [1300220119](#)
[1301240492](#) [1301810221](#) [1365323-1](#) [176P12](#) [1971465-2](#) [20240400003](#) [20240400013](#) [2085828-1](#) [20886510030](#) [2-22733-8](#) [22733-8](#) [CB-](#)
[5PSBC-RS](#) [CB-704EC-RS](#) [CB-BATACC-RS](#) [CB-JST3PSW-RS](#) [CB-M12COM-R10](#) [25AC84](#) [25AK84X](#) [25AU25](#) [25FN82](#) [3011-03](#) [AC118](#)
[ACL-HHS-1M\(CAT5E\)](#) [SSL009PC2DC012N](#) [FC2A-KC6C](#) [2085828-2](#) [20886510150](#) [CCS-FCB-5](#) [CCSF CBF2](#) [R88A-CRWB020N](#)