

GENERAL INFORMATION

LED Driver Type	Constant Current
Maximum Wattage	100 Watts
Input Voltage	120 - 277 VAC \pm 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE I: METAL



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
100W	NON-Dimming								
	700mA	72-143 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-0700N-UNV-I
	1050mA	48-95 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-1050N-UNV-I
	*2100mA	24-48 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-2100N-UNV-I
	0-10V Dimming								
	700mA	72-143 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-0700Z-UNV-I
	1050mA	48-95 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	90%	LC100-1050Z-UNV-I
	*2100mA	24-48 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.90	90%	LC100-2100Z-UNV-I

*Class 2 US ONLY

PRODUCT FEATURES

- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge rating: 2.5kV L-N, L/N-GND
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- MTBF: 170,000 hours at 40°C ambient (~70°C Case temp)
- Inrush Current: <20A Max @230VAC, cold start 25°C
- Output Current tolerance +/- 5% @ 25°C
- 0-10V dimming range: 10%-100%

APPROVALS

- UL 8750 recognized component
- UL 8750 Class P
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) Consumer limits



WARRANTY


- 5 year limited warranty

PACKAGING INFORMATION

Weight: 12.2 oz
Quantity: 30pc/carton

Specifications subject to change without notice.

MECHANICAL SPECIFICATIONS: CASE STYLE I

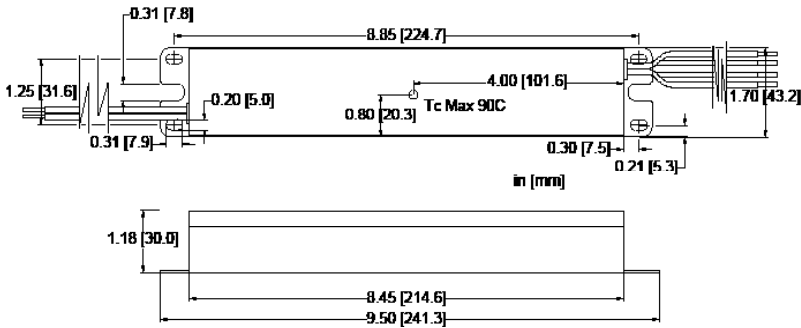


DIMENSIONS [IN/MM]

Length:	9.50 [241.3]
Mounting:	8.85 [224.7]
Width:	1.70 [43.2]
Height:	1.18 [30.0]

WIRING INFORMATION



Input:	12", Black (L), White (N) 18AWG
Output:	12", Red (+), Blue (-) #22AWG
Dimming:	12", Purple (+), Grey (-) # 22AWG

PERFORMANCE CURVES

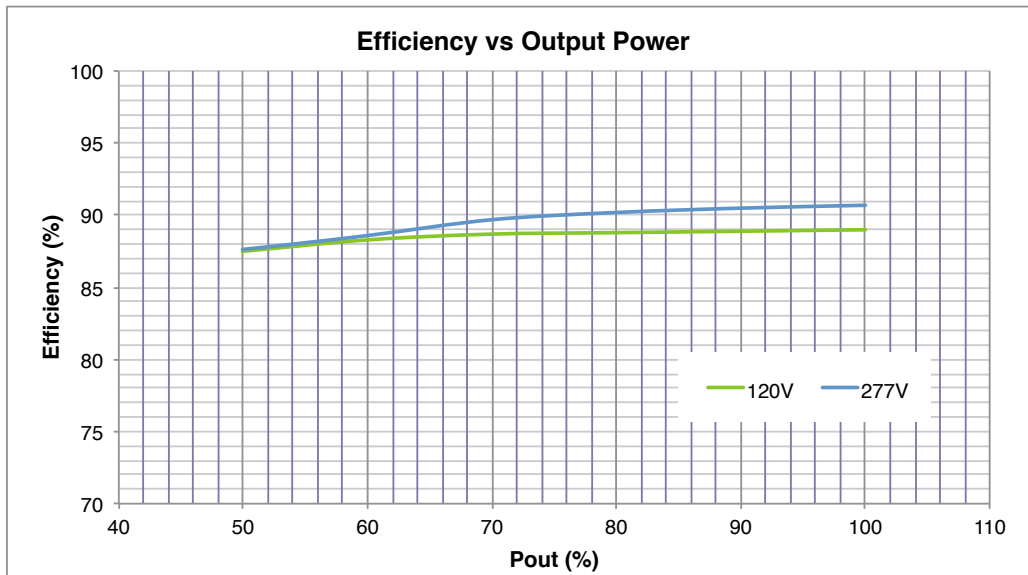


THD, PF and efficiency measured at 25°C.
Measurements made on model LC100-2100Z-UNV-I.

PERFORMANCE CURVES

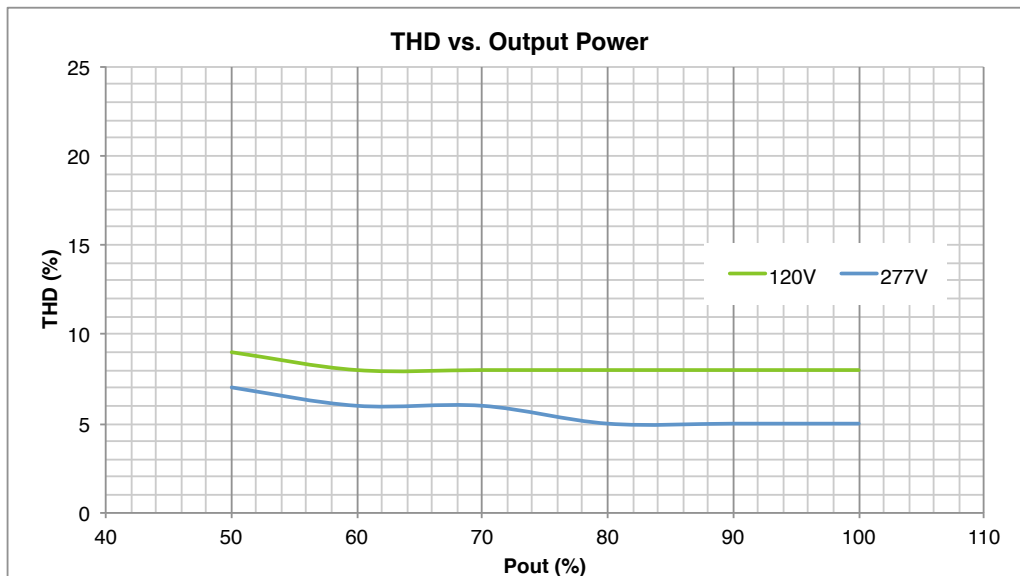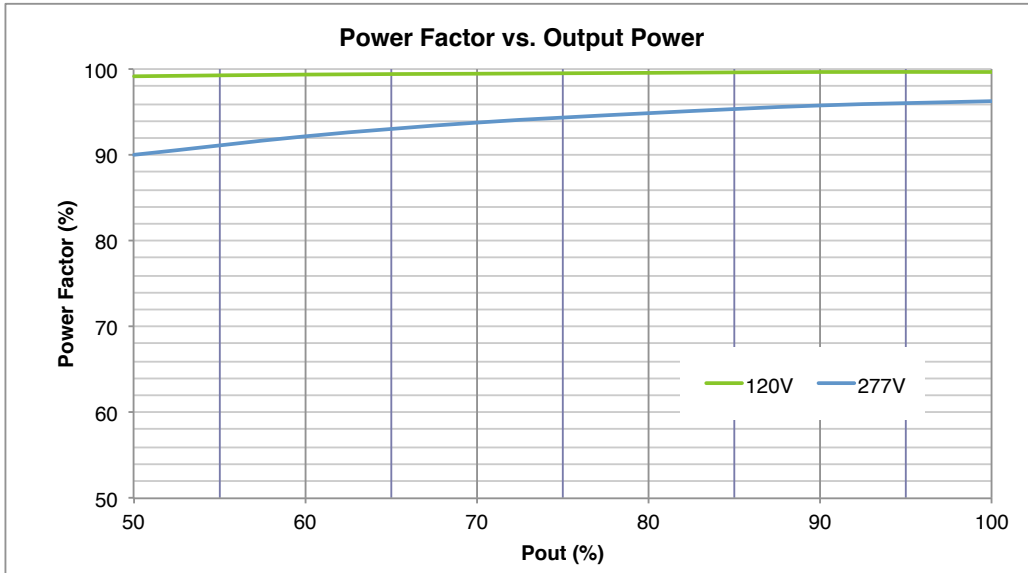

THD, PF and efficiency measured at 25°C.
Measurements made on model LC100-2100Z-UNV-I.

PERFORMANCE CURVES

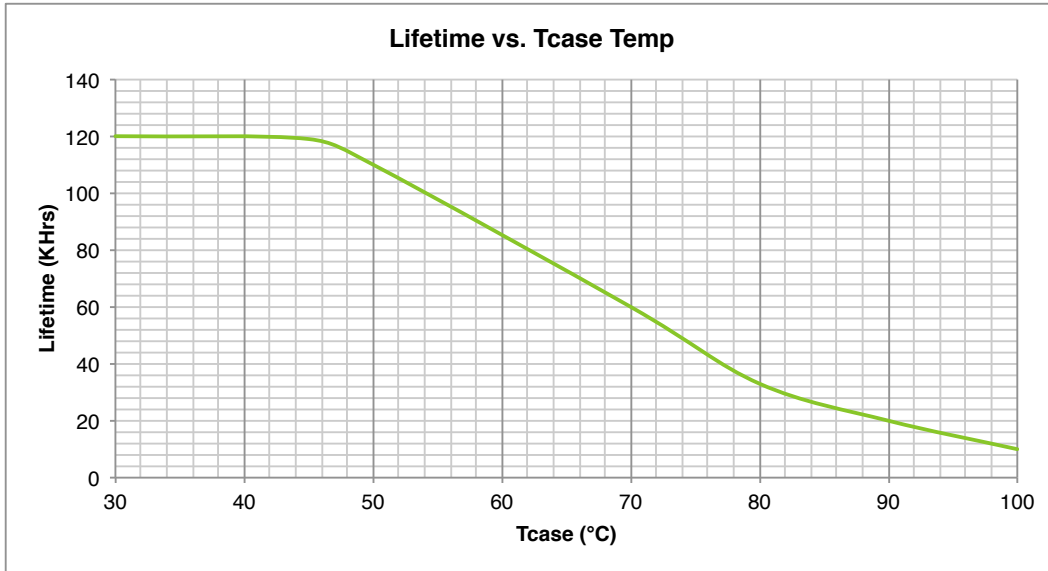

THD, PF and efficiency measured at 25°C.
Measurements made on model LC100-2100Z-UNV-I.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Hatch Lighting](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#)