

GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	16 Watts
Input Voltage	120 VAC ± 10% Dedicated 120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE D: METAL



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
Non-Dimming Models									
16W	*350mA	15 - 46 VDC	Non-Dimming	120 - 277 VAC	20W	0.19/0.09A	>0.90	83%	*LC16-0350N-UNV-D
	400mA	13 - 40 VDC	Non-Dimming	120 - 277 VAC	20W	0.19/0.09A	>0.90	83%	LC16-0400N-UNV-D
	500mA	10 - 32 VDC	Non-Dimming	120 - 277 VAC	20W	0.19/0.09A	>0.90	83%	LC16-0500N-UNV-D
	600mA	10 - 27 VDC	Non-Dimming	120 - 277 VAC	20W	0.19/0.09A	>0.90	83%	LC16-0600N-UNV-D
	700mA	9 - 23 VDC	Non-Dimming	120 - 277 VAC	20W	0.19/0.09A	>0.90	83%	LC16-0700N-UNV-D
	1050mA	8 - 16 VDC	Non-Dimming	120 - 277 VAC	20W	0.16/0.07A	>0.90	82%	LC16-1050N-UNV-D
Dimming Models									
16W	*350mA	15 - 46 VDC	Phase Dimming	120 VAC	20W	0.18A	>0.90	81%	*LC16-0350P-120-D
	400mA	13 - 40 VDC	Phase Dimming	120 VAC	20W	0.18A	>0.90	81%	LC16-0400P-120-D
	500mA	10 - 32 VDC	Phase Dimming	120 VAC	20W	0.18A	>0.90	81%	LC16-0500P-120-D
	600mA	9 - 27 VDC	Phase Dimming	120 VAC	20W	0.18A	>0.90	81%	LC16-0600P-120-D
	700mA	8 - 23 VDC	Phase Dimming	120 VAC	20W	0.18A	>0.90	81%	LC16-0700P-120-D
	1050mA	8 - 16 VDC	Phase Dimming	120 VAC	20W	0.18A	>0.90	80%	LC16-1050P-120-D

*Class 2 US ONLY

PRODUCT FEATURES

- Short circuit and overload protection
- Suitable for wet locations
- Withstanding voltage: I/P – O/P 2.8kVDC, 2mA
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- MTBF: 376,000 hours @ 40°C ambient (~70°C case temp)
- Surge voltage rating: L-N 2kV, L/N-GND 4kV
- Inrush Current: <7A Max @120VAC for 120V input models, cold start 25°C
- Inrush Current: <10A Max @230VAC for Universal input models, cold start 25°C
- Output Current tolerance +/- 5% @ 25°C

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) consumer limits




Type
HL

WARRANTY

- 5 year limited warranty

Specifications subject to change without notice.

MECHANICAL SPECIFICATIONS: CASE STYLE D

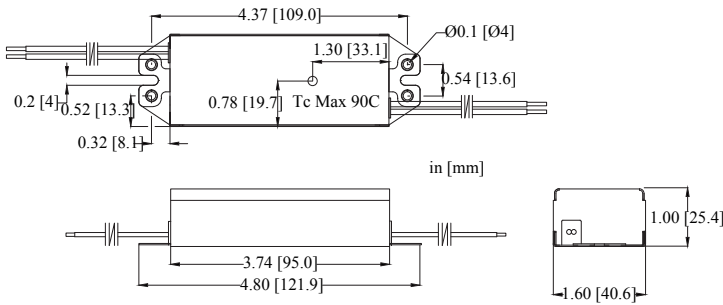

DIMENSIONS [IN/MM]

Length:	4.80 [121.9]
Mounting:	4.37 [111.0]
Width:	1.60 [40.6]
Height:	1.00 [25.4]

WIRING INFORMATION

Input:	12", Black (L), White (N) #18AWG
Output:	12", Red (+), Blue (-) #18AWG


PACKAGING INFORMATION

Weight:	8.3oz
Quantity:	60pc/carton


PERFORMANCE CURVES

Efficiency VS Output Power

Efficiency vs. Output Power - Phase Dimming

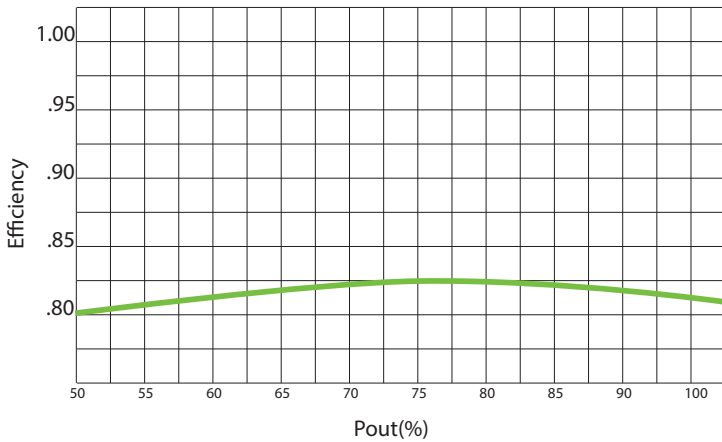


Efficiency vs. Output Power - Non-Dimming

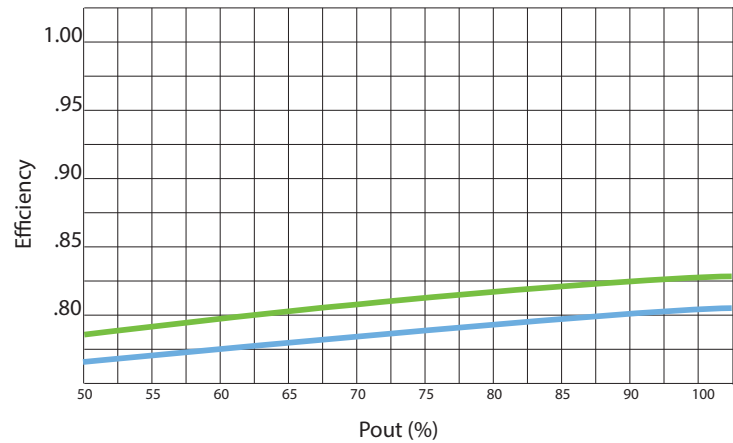


PERFORMANCE CURVES

Power Factor VS Output Power

Power Factor vs. Output Power - Phase Dimming

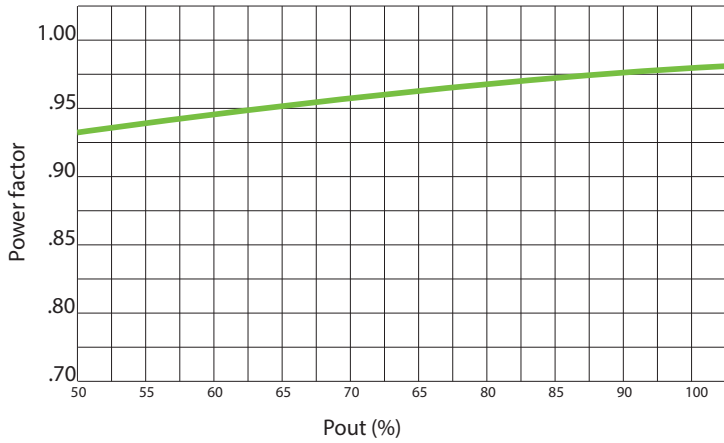


Power Factor vs. Output Power - Non-Dimming

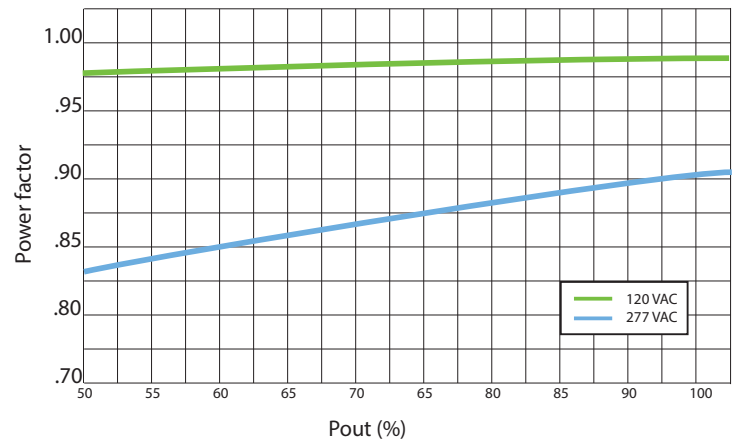


THD vs Output Power

THD vs Output Power - Phase-Dimming

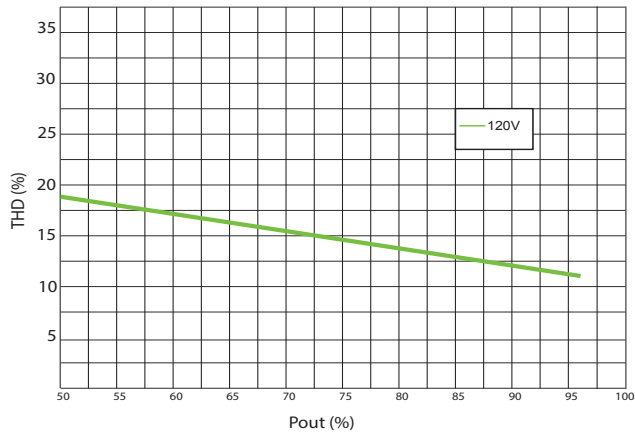


THD vs Output Power - Non-Dimming

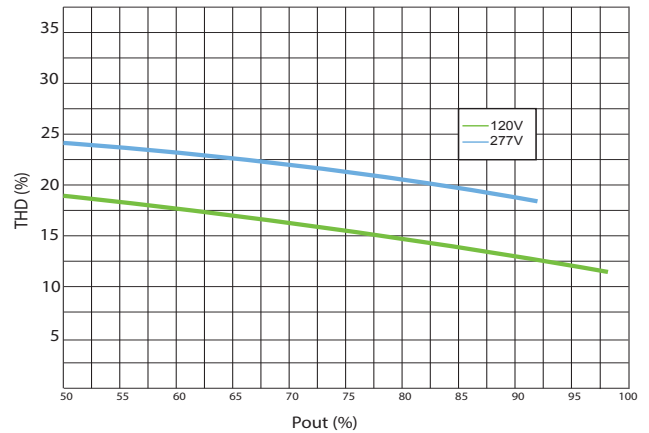

Dimming Curves

Dimming Curve - Phase Dimming

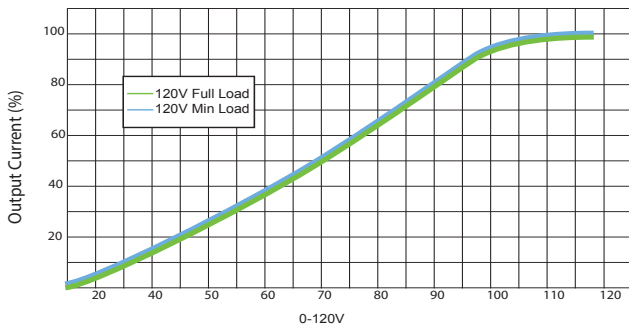


Output voltage range must be maintained throughout entire dimming range.

Specifications subject to change without notice.

Lifetime VS Case Temperature

Lifetime vs Case - Phase Dimming

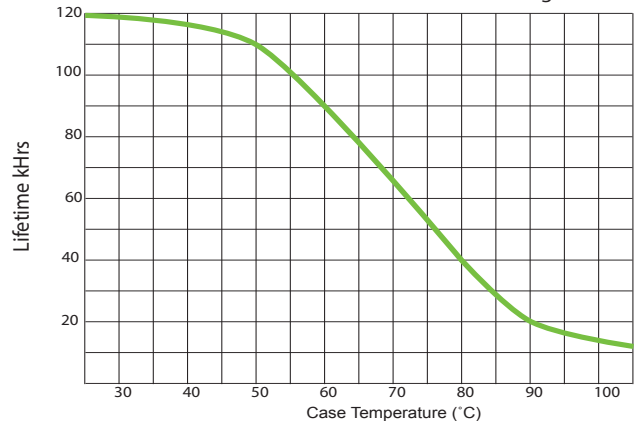

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Hatch Lighting](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#)