

## GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	4 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz

## CASE STYLE: POLYCARBONATE



## ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Current	Power Factor	Efficiency	Hatch Part Number
4W	350mA	8-13V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	84%	LCA004-UNV
	500mA	5-9V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	77%	LCD004-UNV
	700mA	2.8-6.5V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	82%	LCB004-UNV

## PRODUCT FEATURES


- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge voltage rating: L-N 2kV
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- Output Current tolerance +/- 5% @ 25°C

## APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- Meets FCC47 CFR Part 15 (Class A) Non-consumer limits



## MECHANICAL SPECIFICATIONS

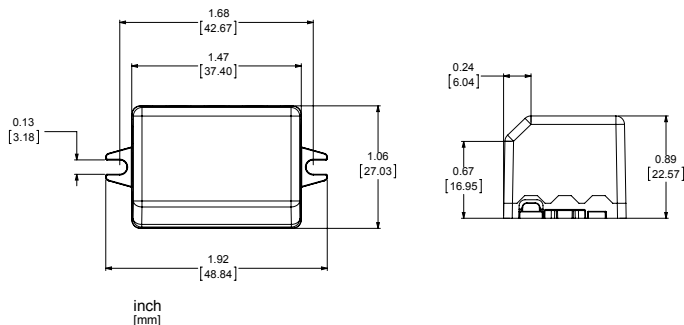

## DIMENSIONS [IN/MM]

Length:	1.92 [48.8]
Mounting:	1.68 [42.7]
Width:	1.06 [27.0]
Height:	0.89 [22.6]

## WIRING INFORMATION

Input:	Black (L) 6" #18AWG
	White (N) 6" #18AWG
Output:	Red (+) 6" #18AWG
	Black (-) 6" #18AWG

## PACKAGING INFORMATION

Weight:	4.1oz
Quantity:	200pc/carton

## WARRANTY

- 5 year limited warranty

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Hatch Lighting](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#)