

RL SERIES


AC LED DRIVERS

AC LED DRIVERS: RL LED SERIES

CASE STYLE: M



CASE STYLE: BF

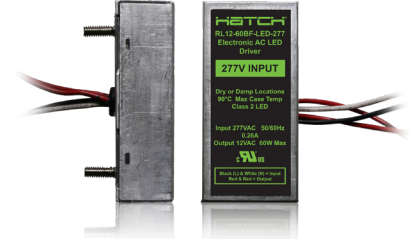

GENERAL INFORMATION

LED Driver Type	AC LED (Class 2)
Maximum Output Power	60 Watts
Input Voltage	120 VAC ± 10% 277 VAC ± 10%
Input Frequency	50/60Hz

PRODUCT FEATURES

- Multiple units supported per circuit
- Short circuit protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge rating: NEMA SSL1-2010 non-roadway 2.5kV
- Operating temperature range: -20°C to 90°C (measured at Tcase)
- Minimum Load: 2W/120V, 5W/277V
- Wide dimming range*
- Recommended ELV dimming*
- Suitable for AC LED or halogen loads

* 120V only. 277V models are non-dimmable

PACKAGING INFORMATION

Unit Weight:	2.8 oz
Quantity:	100pc/carton
Carton Weight:	17 lbs 8 oz

ELECTRICAL SPECIFICATIONS

Output Power	Input Voltage	Input Current	Output Voltage	Max Output Current	Efficiency	Case Style	Hatch Part No.
15W	120 VAC	0.15A	12 VAC	1.3A	90%	M	RL12-15M-LED
	277 VAC	0.065A				BF	RL12-15BF-LED
30W	120 VAC	0.30A	12 VAC	2.5A	90%	M	RL12-30M-LED
	277 VAC	0.13A				BF	RL12-30BF-LED
60W	120 VAC	0.60A	12 VAC	5.0A	90%	M	RL12-60M-LED
	277 VAC	0.26A				BF	RL12-60BF-LED
						M	RL12-60M-LED-277
						BF	RL12-60BF-LED-277

Specifications subject to change without notice

Although Hatch Lighting conducts extensive testing to ensure that all its products perform satisfactorily in the field, site conditions can vary such that untested configurations may exist. We recommend that all customers conduct complete testing of their LED fixture systems to confirm acceptable performance and function.


APPROVALS

- UL 8750 Recognized Component
- RoHS Compliant




WIRING INFORMATION

Input: 6", Black (L), White (N) 300V 200°C #18AWG
Output: 6", Red (+), Red (-) 300V 200°C #18AWG

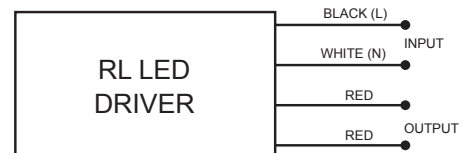

MECHANICAL SPECIFICATIONS

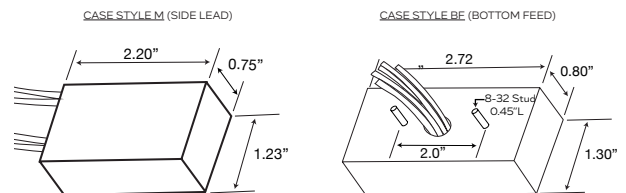

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Hatch Lighting](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#)