

ADJUSTABLE CONSTANT CURRENT LED DRIVER XRC32 (PHASE) PROGRAMMABLE SPECIFICATIONS SHEET

ELECTRICAL SPECIFICATIONS

<i>Input</i>		
Input Voltage (VAC)	120-277V (+/-10%)	
Frequency Range (Hz)	50-60Hz	
	120V	277V
Input Current (A)	0.32	0.14
THD @ Full Load	<10%	<20%
Power Factor @ Full Load	>0.95	>0.95
Efficiency @ Full Load	>80%	>80%
Inrush Current (Apk)	3.75	4.30
<i>Output</i>		
Output Current (mA)	350 - 700mA	
Output Voltage (VDC)	20 - 46V	
Output Ripple Current (mA) (Max Load)	216mA	
Maximum Output Power (W)	32W	
LED Power Up Time	<500ms	
Load Regulation	<3%	
Line Regulation (Max Load)	<3%	
Over Voltage Protection	Yes, Auto Recovery	
Over Load Protection	Yes, Auto Recovery	
Output Short-Circuit Protection	Yes	
Over Temperature Protection	Yes	



Type TL

Specifications subject to change without notice.

GENERAL INFORMATION

Order Number	XRC32-0700P-UNV-I
Type	Constant Current, Class 2
Output Power	32W (Maximum)
Programming Method	I-LOC Keys

DIMMING

Dimming Control	Phase Dimming @ 120V only
Dimming Range	Dims to Off

ENVIRONMENTAL SPECIFICATIONS


Minimum Operating Temperature	-30°C
Maximum Case Temperature (Tc)	85°C ¹
Maximum Storage Temperature	70°C
Maximum Relative Humidity (%)	85%, non-condensing
Transient Protection	NEMA SSL1-2010 Non-Roadway 2.5kV
UL Environment Rating	Dry & Damp
UL File Number	E341915
EMI Compliance	FCC Part 15 Class B
Sound Rating	Class A

¹80°C Maximum Case Temperature for Warranty Purposes

WIRING

Input:	6" #18AWG Black (L), White (N)
Output:	6" #24AWG Red (+), Black/White (-)

DIMENSIONS

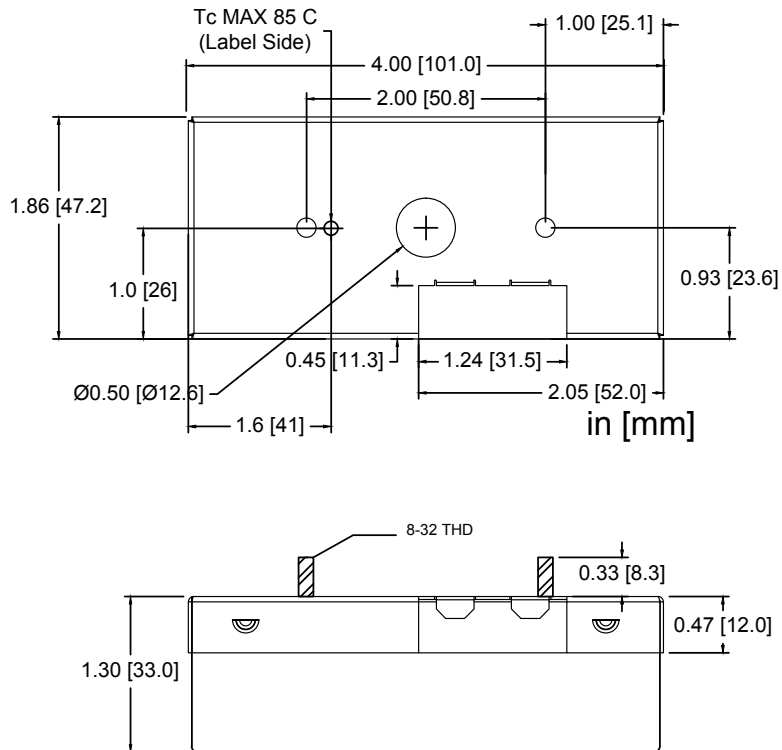

Always confirm fit with a physical sample.

PACKAGING INFORMATION

Weight: 0.57 lbs

Quantity: 50 pc/carton

PROGRAMMABILITY

Hatch I-LOC Technology enables quick and easy setting of driver output current with the simple click of a key. Select the appropriate I-LOC key for the desired output current and click it into the driver.


The keys are **Interchangeable** across the Hatch I-LOC LED Driver product family and have a 50% to maximum output range. The 0.28 to 0.48 keys are designed exclusively for the Linear I-LOC family.

Drive Factor	Part Number	Max Output mA	Voltage Range V	Max Output W
1.00	XA100	700	20-46	32
0.98	XB098	686	20-46	32
0.95	XC095	665	20-46	31
0.93	XD093	651	20-46	30
0.90	XE090	630	20-46	29
0.88	XF088	616	20-46	29
0.85	XG085	595	20-46	28
0.83	XH083	581	20-46	27
0.80	XI080	560	20-46	26
0.78	XJ078	546	20-46	26
0.75	XK075	525	20-46	25
0.73	XL073	511	20-46	24
0.70	XM070	490	20-46	23
0.68	XN068	476	20-46	22
0.65	XO065	455	20-46	21


Drive Factor	Part Number	Max Output mA	Voltage Range V	Max Output W
0.63	XP063	441	20-46	21
0.60	XQ060	420	20-46	20
0.58	XR058	406	20-46	19
0.55	XS055	385	20-46	18
0.53	XT053	371	20-46	17
0.50	XU050	350	20-46	16
0.48	XLA048	Not Applicable on XRC Models		
0.45	XLB045			
0.43	XLC043			
0.40	XLD040			
0.38	XLE038			
0.35	XLF035			
0.33	XLG033			
0.30	XLH030			
0.28	XLI028			

Adjusted Output Current
Tolerance +/- 3%

OPERATING RANGE

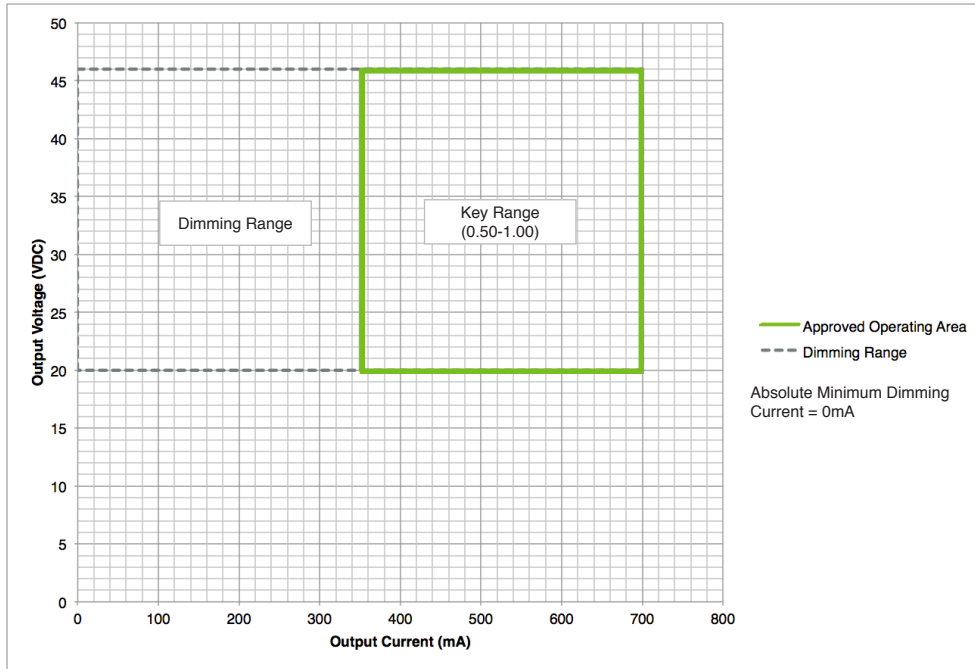

DIMMING

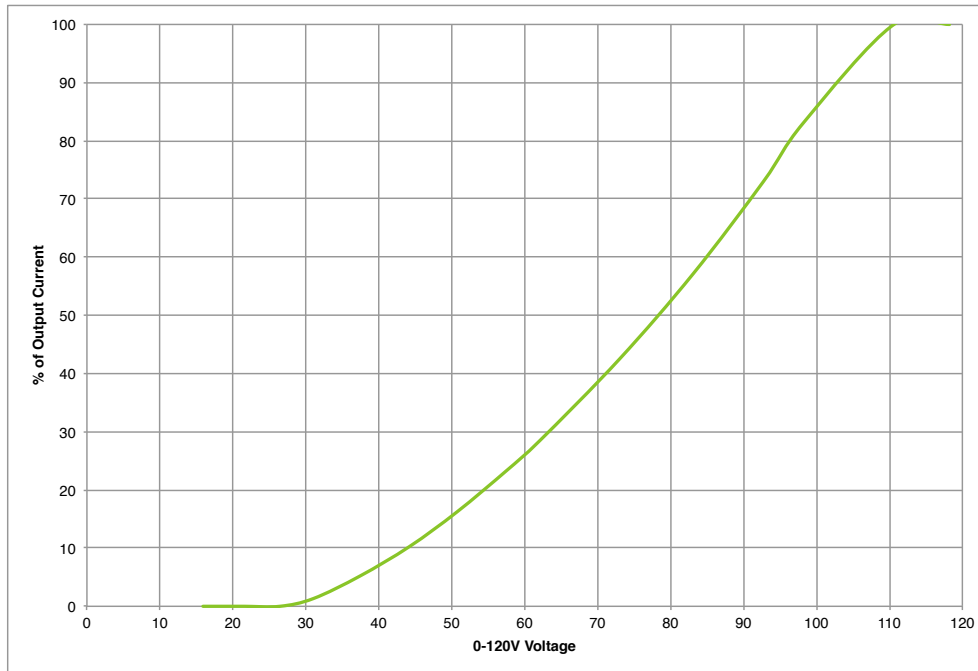

LIFETIME (FULL LOAD)

PENDING

TL INFORMATION

Key Range	Tref Max	Tref - Measured @ 40°C
0.50 - 0.65	82°C	52°C
0.68 - 0.80	90°C	58°C
0.83 - 1.00	78°C	63°C

INRUSH CHARACTERISTICS

Input Voltage Vin (Vrms)	Ipk (A)	T 50%pk (µS)
120	3.75	37
277	4.30	58

For Performance Curves, contact your sales representative.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Fixture Accessories](#) category:

Click to view products by [Hatch Lighting](#) manufacturer:

Other Similar products are found below :

[XVBC081](#) [1-2315539-1](#) [2306129-1](#) [180997-0001](#) [1-2213996-1](#) [4821](#) [2702312](#) [MC39-1J-UNNU](#) [X48V](#) [XF088](#) [XG085](#) [XJ078](#) [XK075](#)
[XL073](#) [XN068](#) [XO065](#) [XP063](#) [XR058](#) [XQ060](#) [XH083](#) [XE090](#) [XS055](#) [XC095](#) [XT053](#) [XU050](#) [XV-TD](#) [4775](#) [5012](#) [5014](#) [LL01A00CSLB2](#)
[LL01A00CWGB2](#) [1301130007](#) [1301120097](#) [1301120099](#) [1301120101](#) [1301120114](#) [1301120153](#) [1301120154](#) [1301120157](#) [1301120174](#)
[1301120110](#) [1301120137](#) [1301120130](#) [1301860719](#) [1301120131](#) [1301120144](#) [1301120196](#) [1301850471](#) [2702313](#) [2702315](#)