


TCVXO UNIT WITH CLIPPED SINE WAVE / HCMOS SMD 7.0x5.0mm CERAMIC SEAM SEAL PACKAGE.

PRODUCT FEATURES

- Small dimensions 7.0x5.0x1.4 with 10 solder pads.
- Tight stabilities over temperature range.
- Voltage control function allows compensation of tolerance.
- RoHS compliant, LEAD-FREE, HALOGEN-FREE and REACH compliant.

PRODUCT PHOTO (NOT IN SCALE)



APPLICATIONS


- WiMAX / WLAN / Ethernet
- Telecommunication
- Mobil applications
- Base stations

PRODUCT SPECIFICATIONS

PARAMETER	SUPPLY VOLTAGE 3.3V	REMARKS
Frequency range	10 ~ 52MHz	--
Frequency tolerance	±1.0ppm	Initial tol. @+25°C
Frequency stability	±0.1ppm; ±0.25ppm; 0.28ppm; ±0.5ppm; ±1ppm	See note below table
Operating temperature range	-10 to +70°C / -30 to +85°C / -40 to +85°C	In combination to above stabilities.
Aging per year	±1.0ppm	@+25°C
Control voltage range Vc	0.5 ~ 2.5V _{DC}	Voltage on pin 1
Frequency pulling range	±5.0ppm	Over control voltage
Output waveform	HCMOS or Clipped Sinewave	--
Output load	15pF; 10kΩ/10pF	--
Output voltage level	0.33/2.97V; 0.8Vpp	--
Phase noise (example 19.2MHz)	-120dBc/Hz / -140dBc/Hz / -148dBc/Hz	@100Hz / @1kHz / @10kHz
Phase jitter RMS	<1ps	12kHz ≤ Fj ≤ 20MHz
Supply current	3.5mA; 6mA	--

Note: Frequency stability is the frequency deviation over temperature range in reference to +25°C


PACKAGE OUTLINE / DIMENSIONS

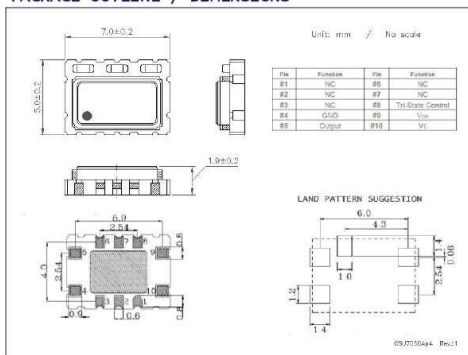

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 12mm.
- Component pitch in carrier 8mm.
- Reel diameter 180mm.
- QTY per reel: 1,000pcs

RECOMMENDED REFLOW PROFILE

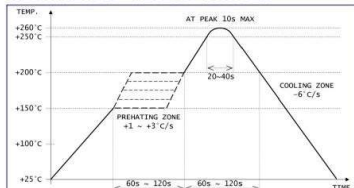

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [HCI manufacturer](#):

Other Similar products are found below :

[AST3TQ-40.000MHZ-5](#) [SIT5000ACC8E-33VQ-19.200000X](#) [SiT5001AI-2E-33N0-48.000000X](#) [TG3225CEN 25.0000M-KFGNNAB](#)
[SIT5001AI-2E-33N0-24.000000x](#) [SIT1566AC-JV-18E-32.768E](#) [AST3TDATAACJ5-10.0000MHz](#) [AST3TDATAACJ5-20.0000MHz](#)
[AST3TDA53TACJ2-38.8800MHz](#) [AST3TDATAACJ5-38.8800MHz](#) [NT0503CC3I287EN10](#) [NT0503CH3I287CN25](#) [NT0503CH3I287CN30.72](#)
[NT0503CC3I287DN20](#) [TG-3541CE 32.7680KXB0](#) [KT1612A26000AAW18TBL](#) [KT1612A26000AAW18NBL](#) [TG-5006CG-12H 26.0000M0](#)
[TG2520SMN 38.4000M-MCGNNM3](#) [TG-5006CG-28L 52.0000MX](#) [X1G004131000900](#) [X1G0041310042](#) [1XXC26000PKA](#)
[X1G005441030316](#) [X1G005441020616](#) [X1G005441030416](#) [X1G005421020416](#) [X1G005441020316](#) [7L26002007](#) [1XTV12800MDA](#)
[X1G005421031215](#) [X1G005421020516](#) [SX1T19.200B010J020S](#) [T132S4-25000ML33DTL](#) [X1G0053710200](#) [NT0503CH3I287EN10](#) [8153H-](#)
[50.000LH33DTL](#) [NT0503EH3I106EN10](#) [NT0503CH3I207EN10](#) [NT0507BH3I507EA10](#) [BT0507BC3I287CN38.4B](#) [NT0507BH3I106BA50](#)
[NT0503CH3I507CN24.576](#) [OW2EL89CENUXFMYLC-16M](#) [OW2EL89CENUXFMYLC-32M](#) [OW7EL89CENUYO3YLC-24M](#)
[OW3EL89CENUNFAYLC-26M](#) [OW7EL89CENUYO3YLC-20M](#) [OW7EL89CENUNFAYLC-52M](#) [OW2EL89CEI-XFMYLC-25M](#)