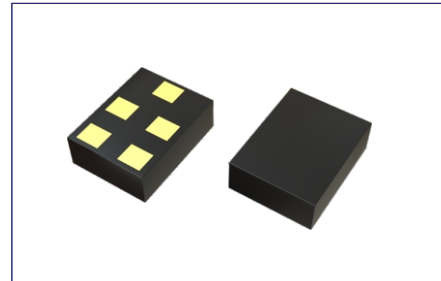
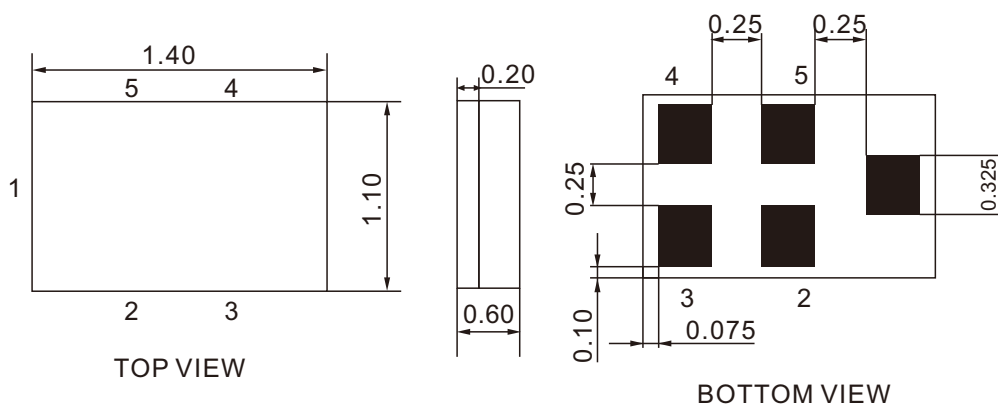


SMD 1.4X1.1X0.6 CSP PACKAGE
PRODUCT FEATURES

- Ultra Small size 1.4x1.1x0.6mm
- CSP process with chip scale package
- Standardization of small size
- Good stability and high reliability
- Mainly used in GPS navigation
- TDD/FDD communication and artificial intelligence chips
- ROHS compliant

PRODUCT PHOTO

PRODUCT SPECIFICATIONS

Item		Specifications	Unit
Frequency Range	f_c	800~3600MHz	MHz
Standard Frequency		1575.42, 1582.4, 1568, 2655	MHz
Useful Band Width		3, 18, 48 or specify	MHz
Insertion Loss (min)	IL	0.9, 1.3, 1.8, 2.2 or specify	dB
VSWR(max)		2.0	dB
Operating Temperature Range		-40~+85	°C
Storage Temperature Range		-40~+85	°C

PACKAGE OUTLINE / DIMENSIONS


Pin No.	Description
1	Input
4	Output
2,3,5	To be grounded

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resonators](#) category:

Click to view products by [HCI](#) manufacturer:

Other Similar products are found below :

[B39431R820H210](#) [ECS-HFR-40.00-B-TR](#) [CSTLS4M00G53Z-A0](#) [ECS-HFR-20.00-B-TR](#) [CSTNE16M0V510000R0](#)
[CSTNE14M7V510000R0](#) [CSTNE8M00GH5C060R0](#) [DJ2032K768C5T8188X01](#) [KZA20000](#) [KZA3580](#) [KZA107](#) [HCTB1-1.000-CRBHRL](#)
[SF11S5-1582.400-F04IL02AL](#) [AWSZT-3.58CP-T4](#) [SF33M6-836.500-F25IL28AL](#) [HCTB1-460.000-CRBEL](#) [SF33M6-1960.000-F60IL25AL](#)
[SRD11-315.000-F75IL22AL](#) [SR21S4-433.920-F75IL18AL](#) [SF11S5-915.000-F26IL02AL](#) [SF33M6-1575.420-F02IL40AL](#) [SR32M4-433.920-](#)
[F75IL25AL](#) [SRTO39-316.800-F75IL13AL](#) [HCTB1-455.000-CRBEL](#) [KZA24000](#) [KZT6000](#) [KZA8000](#) [KZA169344](#) [KZT2350](#) [KZT169344](#)
[KZT24000](#) [KF143392](#) [KZA4000](#) [KTOR423](#) [KUM20950](#) [KZB455E](#) [KZA16000](#) [KZT16000](#) [KZT4190](#) [KZA12000](#) [KZA3640](#) [KZT10000](#)
[KD143392](#) [KZT20000](#) [KTO43392](#) [KZA2000](#) [KZA5000](#) [KZT3640](#) [KZT12000](#) [KZB460E](#)