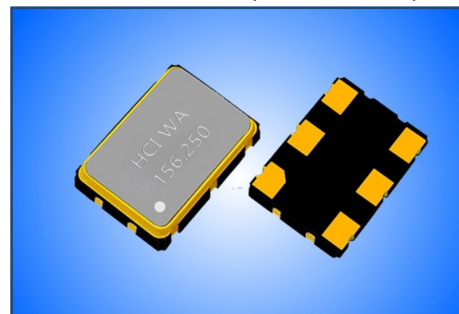


VCXO UNIT WITH HCMOS OUTPUT IN SMD 3.2x2.5MM CERAMIC SEAM SEAL PACKAGE.
PRODUCT FEATURES

- Small dimensions 3.2x2.5x1.0 with 6 solder pads.
- Tight stabilities over temperature range.
- Tristate enable/ disable function (pad 2).
- RoHS compliant, LEAD-FREE, HALOGEN-FREE and REACH compliant.

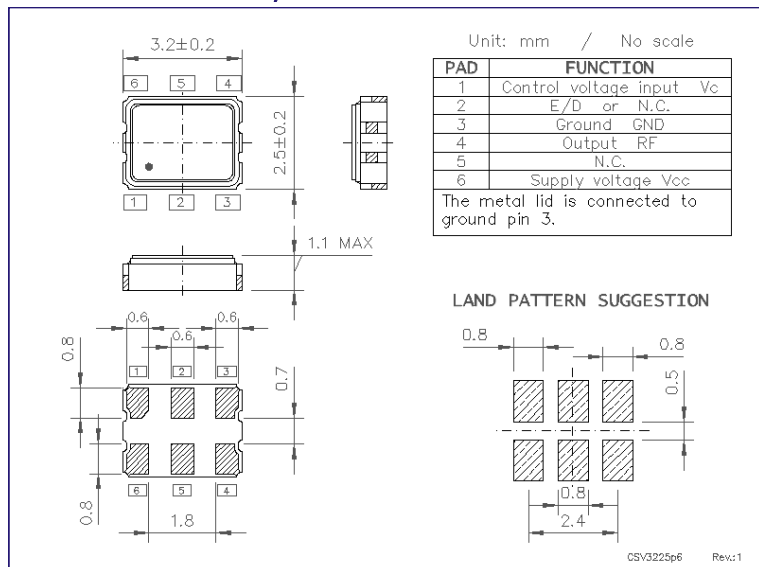
APPLICATIONS

- WiMAX / WLAN / Ethernet
- DSL / VoIP
- Cable modem
- Set-top box / HDTV

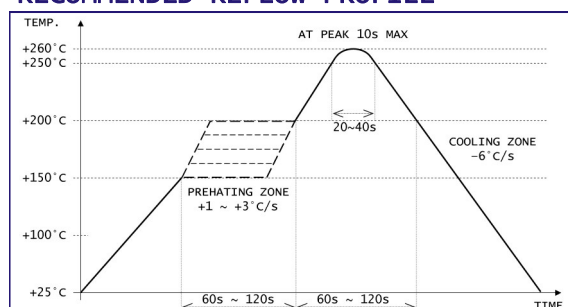
PRODUCT PHOTO (NOT IN SCALE)

PRODUCT SPECIFICATIONS

PARAMETER	SUPPLY VOLTAGE			REMARKS
	1.8V	2.5V	3.3V	
Frequency range	15 ~ 50MHz	10 ~ 250MHz	10 ~ 250MHz	--
Frequency stability	±25ppm / ±50ppm / ±100ppm			See note below
Operating temperature range	-10 to +60°C / -20 to +70°C / -40 to +85°C			Options available
Aging first year	±3.0ppm			@+25°C
Frequency pulling range	±50ppm ~ ±200ppm			Depending on frequency
Supply current	40mA	45mA	50mA	@15pF
Output waveform and load	LVCMOS 15pF			30pF optional
Output voltage level HIGH	1.62V	2.25V	2.97V	Minimum
Output voltage level LOW	0.18V	0.25V	0.33V	Maximum
Rise and Fall times	6ns			@10~90% of V _{CC}
Symmetry (duty cycle)	40~60% or 45~55%			@ 50%V _{CC}
Phase jitter RMS	0.8 ~ 1ps			12kHz ≤ F _j ≤ 20MHz
Phase noise (27MHz)	-132dBc			@ 1kHz
	-147dBc			@ 10kHz
	-152dBc			@ 100kHz

Note: Stability includes frequency deviations at +25°C, over temperature range, due to supply voltage changes, output load changes, shock and vibration.

PACKAGE OUTLINE / DIMENSIONS

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 8mm.
- Component pitch in carrier 4mm.
- Reel diameter 180mm.
- QTY per reel: 3,000pcs

RECOMMENDED REFLOW PROFILE


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [VCXO Oscillators](#) category:

Click to view products by [HCI manufacturer](#):

Other Similar products are found below :

[3808AI-DF-33NG-80.0000](#) [SIT3808AI-CF-33EM-50.000000X](#) [603281](#) [YNETHE125](#) [FRSONT019](#) [SiT3701AC-43-33C-10.00000X](#)
[315LB3I1250T](#) [CVPD-922X-100.000](#) [FY3HCJM45.1584-BULK](#) [CVSS-945-125.000](#) [CVHD-957-24.576](#) [SiT3807AC-C2-33EB-12.288000Y](#)
[CVHD-950-122.880](#) [CVHD-950-80.000](#) [CVHD-950X-100.000](#) [CVHD-950X-122.88](#) [CVPD-920-100.000](#) [ASG-P-V-A-1.000GHZ](#)
[LFTVXO009900BULK](#) [LFTVXO009905BULK](#) [LFTVXO009909BULK](#) [LFVCXO025892](#) [MK3722GLFTR](#) [LFTVXO009900](#) [BTCS5-](#)
[40MCFACBT](#) [CVHD-950X-50.000](#) [ABLJO-V-122.880MHZ-T2](#) [357LB3I032M7680](#) [357LB3I040M0000](#) [357LB3I016M3840](#) [CVHD-950-](#)
[76.800](#) [EV32C6A3A1-24.576M-TR](#) [ECXV-L37C2N-148.500](#) [CD-700-LAF-HAD-50M0000000-CT](#) [CVHD-950X-120.000](#) [ECXV-P37C2M-](#)
[640.000](#) [LFTVXO076348CUTT](#) [LFTVXO076344CUTT](#) [ECXV-P37C2N-155.520](#) [ECXV-P37C2N-184.320](#) [ECXV-P37C2N-155.000](#)
[LFTVXO076346CUTT](#) [LFTVXO072344CUTT](#) [LFTVXO076349CUTT](#) [LFVCXO025892BULK](#) [ASG-D-V-A-1.000GHZ](#) [ASG-D-V-A-](#)
[491.520MHz](#) [ECS-2532VXO-270B-2.8](#) [CVHD-950-125.000](#) [CVPD-920-74.25](#)