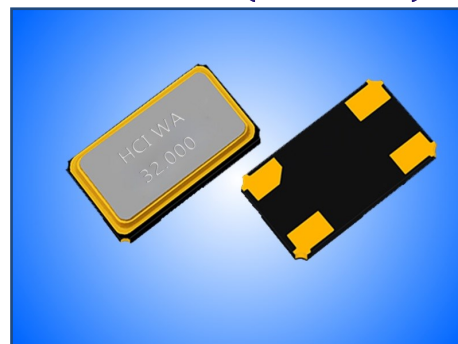


QUARTZ CRYSTAL UNIT IN SMD 6.0x3.5MM CERAMIC SEAM SEAL PACKAGE.
PRODUCT FEATURES

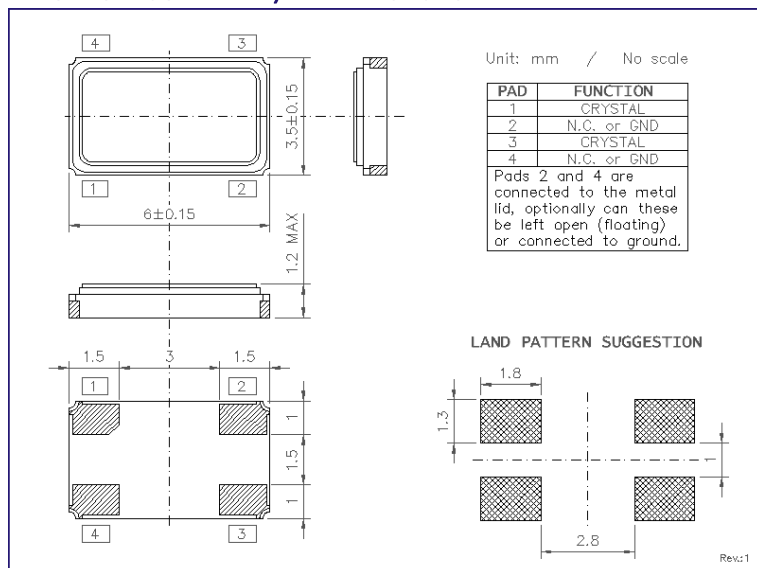
- Dimensions 6.0x3.5x1.0 with 4 solder pads.
- Highly reliable seam sealed ceramic package.
- Tight tolerances and stabilities over temperature range.
- Automotive compliance to AEC-Q200 available.
- RoHS compliant, LEAD-FREE and HALOGEN-FREE.

APPLICATIONS

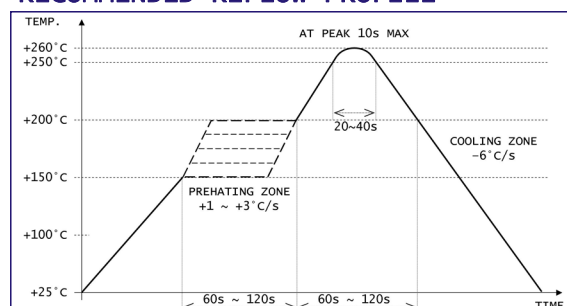
- Wireless LAN
- Bluetooth
- Mobil communication
- Handheld equipment

PRODUCT PHOTO (NOT IN SCALE)

PRODUCT SPECIFICATIONS

| PARAMETER | XC63M4 | | CONDITIONS / REMARKS | |
|------------------------------|--------------------------|--------------|---|------------|
| Nominal frequency range | 8.000 ~ 80.000MHZ | | Fundamental up to 55MHZ and 3rd overtone available. | |
| Crystal cut and mode | AT-cut / FUND & 3rd OT | | | |
| Frequency tolerance | ±10ppm / ±20ppm / ±30ppm | | other options available. | |
| Frequency stability | ±10ppm | ±15ppm | Other options available. | |
| Operating temperature range | -20 to +70°C | -30 to +85°C | Other options available. | |
| Equivalent series resistance | FUND | ESR | 16.1 to 20.0MHZ | <45Ω |
| | 8.0MHZ | <100Ω | 20.1 to 55.0MHZ | <40Ω |
| | 8.1 to 10.0MHZ | <80Ω | 3rd OT | ESR |
| | 10.1 to 12.0MHZ | <60Ω | 30.0 to 48.0MHZ | <100Ω |
| | 12.1 to 16.0MHZ | <50Ω | 48.1 to 80.0MHZ | <80Ω |
| Load capacitance | 6 ~ 32pF or SERIES | | Please specify. | |
| Shunt capacitance | <5.0pF | | -- | |
| Drive level | 100μW TYP / 500μW MAX | | -- | |
| Storage temperature range | -55 to +125°C | | -- | |

PACKAGE OUTLINE / DIMENSIONS

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 12mm.
- Component pitch in carrier 8mm.
- Reel diameter 180mm.
- QTY per reel: 1,000pcs MAX.

RECOMMENDED REFLOW PROFILE


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [HCI](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [MMCC2R32.7680KHZ](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#)