

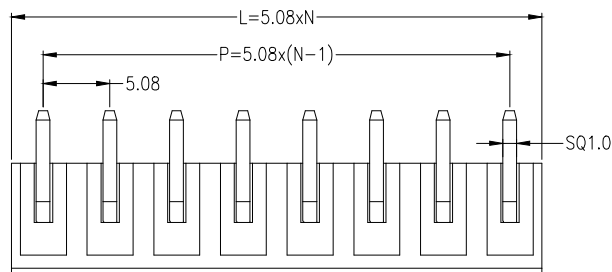


SECTION A-A

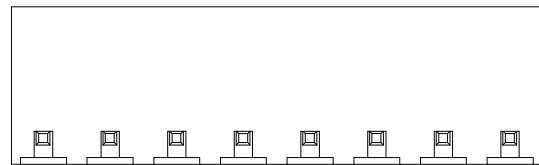

公差参数

| Poles  | Dim   | Dim P | Dim L |
|--------|-------|-------|-------|
| 2-6P   | ±0.10 | ±0.20 |       |
| 7-12P  | ±0.20 | ±0.30 |       |
| 13-18P | ±0.25 | ±0.40 |       |
| 19-24P | ±0.30 | ±0.50 |       |

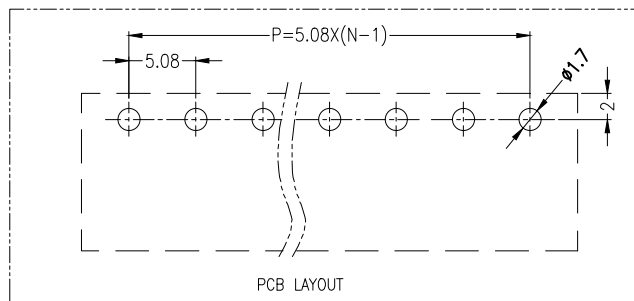

材料及电镀

- ①. 塑件主体: PA66, UL94V-0
- ②. 焊 针: 黄铜, 镀镍

电气性能

额定电压: 300V  
 额定电流: 15A  
 接触电阻: 20mΩ (Max)  
 绝缘电阻: 500MΩ \DC500V  
 耐 电 压: AC2000V\1Min

机械性能

温度范围: -40℃ ~ +105℃  
 瞬时温度: +250℃ ,5秒

Ordering Information

HC2EDG \* \* - \* - NP - \*

|      |       |             |              |          |
|------|-------|-------------|--------------|----------|
| Type | 款式-开口 | Pitch       | No. of Poles | Colour   |
| V=直插 | C=弯插  | 2.54=2.54mm | 2=2Pin       | V=Green  |
| H=带焊 | B=带焊  | 3.5=3.50mm  | 2-24Pin      | L=Bluc   |
|      |       | 3.81=3.81mm | 2P=2Pin      | O=Orange |
|      |       | 5.08=5.08mm | 3P=3Pin      | R=Red    |
|      |       | 7.62=7.62mm | .....        | B=Black  |
|      |       |             |              | OR=Gray  |

|  |  |  |                   |            |  |                   |       |     |
|--|--|--|-------------------|------------|--|-------------------|-------|-----|
|  |  |  | GENERAL TOLERANCE | 制图         | 深圳市华灿天禄电子有限公司                            |                   |       |     |
|  |  |  | DIM TOL           | 审核         | ShenzhenhuacantianluELECTRONICS CO., LTD |                   |       |     |
|  |  |  | X.X ±0.50         | 批准         | 产品名称                                     | 5.08 单排 插拔式 接线端子  | 版本    | A   |
|  |  |  | X.XX ±0.30        | APPROVAL   | TITLE                                    | 开口 弯针             | REV.  |     |
|  |  |  | X.XXX ±0.10       | 比例         | 产品料号                                     | HC2EDGR-5.08-NP-V | 单位    | mm  |
|  |  |  | Angle ±3.0°       | 投影         | PART NO.                                 |                   | 页次    | 1/1 |
|  |  |  |                   | Projection | MATERIAL                                 |                   | SHEET |     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [HCTL](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)