



SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

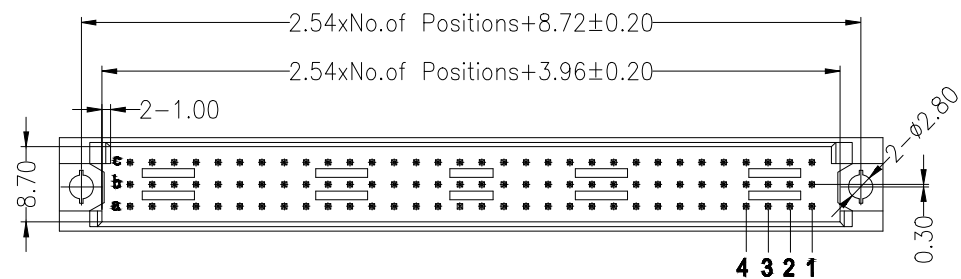

| Dimension antitheses list | |
|---------------------------|------|
| ITEM | A |
| Standard | 4.00 |

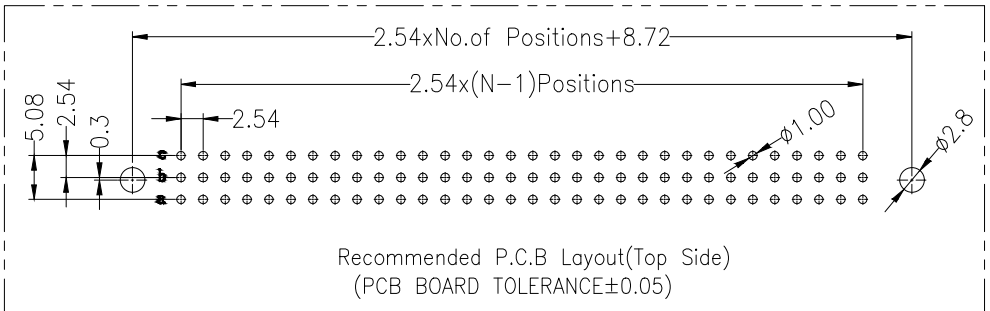

Ordering Information

HC-CZ 254 - * - N - Z - * - * - *

| | | | | | |
|-------------|-------------|------|-----------|-------------------|--------------|
| No.of Rows | No.of Pins | Type | Length | Contact Plating | Contact Type |
| 2=Dual Row | 10/16/20Pin | Z=直插 | (Plastic) | G0:Gold Flash | F=Female |
| 3=Three Row | 32/44/48Pin | M=密封 | (塑料) | G1:1u" Gold | M=Male |
| 4=Four Row | 64Pin | | | G2:3u" Gold | |
| | | | | G3:5u" Gold | |
| | | | | G4:10u" Gold | |
| | | | | G5:15u" Gold | |
| | | | | G6:30u" Gold | |
| | | | | S0:Gold Flash/Tin | |
| | | | | S1:Tin | |

| | | | | | | | | | | |
|------------------------|--|--|------------------|-------|-------------------|--|----------------------------------------------------------|--|-------------|-----|
| | | | GENREL TOLERANCE | | 制图 DRAWING | | 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD | | | |
| | | | DIM | TOL | 审核 CHECK | | 产品名称 TITLE | | 版本 REV. | A |
| | | | X.X | ±0.30 | 批准 APPROVAL | | 产品料号 PART NO. | | 单位 UNITS | mm |
| 1 | | | X.XX | ±0.20 | 比例 SCALE | | HC-CZ254-3-N-Z-11.5-XX-M | | 页次 SHEET | 1/1 |
| 序号 No. | | | X.XXX | ±0.10 | 投影 Projection | | 材料 MATERIAL | | | |
| 变更内容 MODIFY CONTENT | | | Angle | ±3.0° | 日期 MODIFY DATE | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [HCTL](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [MIS-048-01-F-D-DP-K](#)
[832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [MDF7-40DP-2.54DSA\(55\)](#)
[MIT-114-03-F-D-K](#) [55323-1519](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [55650-0588-C](#) [75140-](#)
[7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [YTT-112-01-H-Q](#) [063209](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [YTE-](#)
[12002H6740](#) [YTQ-12103HQ](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [354184](#) [MIT-019-04-F-D-K](#)
[P50-028-DDS-TG](#) [53309-2471](#) [54546-2071](#) [1586617-1](#) [504208-3010](#) [504208-5010](#) [504248-1010](#) [504248-1210](#) [504248-2010](#) [LST-115-07-S-](#)
[D](#) [LST-105-07-G-D](#) [9159005551906](#)