



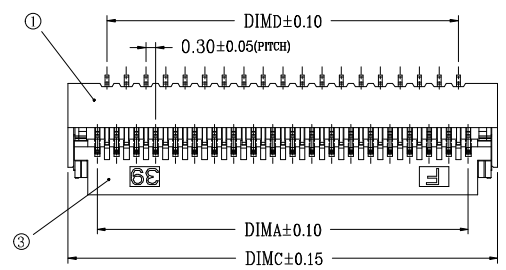
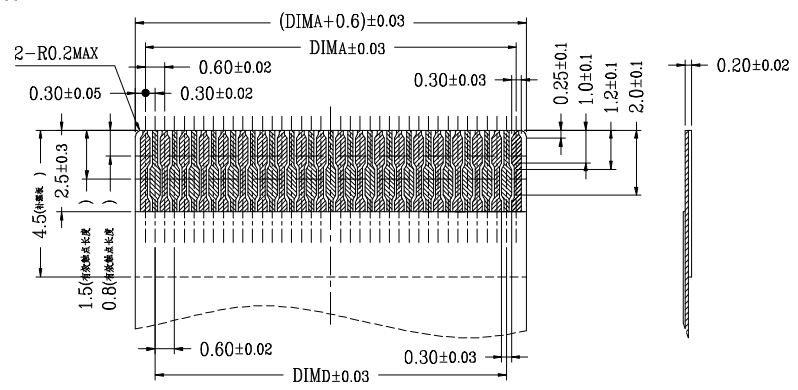
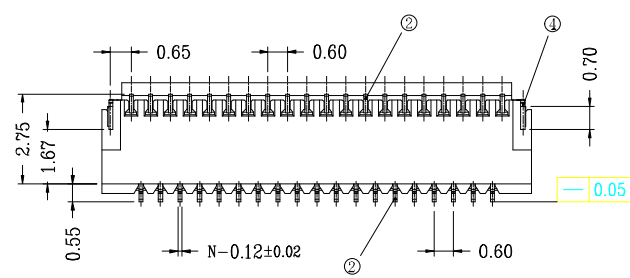


| 版次 | 变更摘要 | 日期 |
|----|--------|-----------|
| 1 | 增加料号说明 | 2015/1/28 |

| 序号 | 品名 | 材质 |
|----|----------------|----------------|
| ① | 0.3掀盖胶芯 (H1.0) | LCP UL94V-0 本色 |
| ② | 0.3掀盖端子 (H1.0) | 铜合金/表面镀金 |
| ③ | 0.3掀盖后盖 (H1.0) | LCP UL94V-0 黑色 |
| ④ | 0.3掀盖焊片 (H1.0) | 铜合金/表面镀锡 |



SECTION A-A
SCALE 2:1




| CKT | DIMA | DIMB | DIMC | DIMD |
|-----|-------|-------|-------|-------|
| 13 | 3.60 | 4.24 | 5.40 | 3.00 |
| 15 | 4.20 | 4.84 | 6.00 | 3.60 |
| 17 | 4.80 | 5.44 | 6.60 | 4.20 |
| 19 | 5.40 | 6.04 | 7.20 | 4.80 |
| 21 | 6.00 | 6.64 | 7.80 | 5.40 |
| 23 | 6.60 | 7.24 | 8.40 | 6.00 |
| 25 | 7.20 | 7.84 | 9.00 | 6.60 |
| 27 | 7.80 | 8.44 | 9.60 | 7.20 |
| 29 | 8.40 | 9.04 | 10.20 | 7.80 |
| 31 | 9.00 | 9.64 | 10.80 | 8.40 |
| 33 | 9.60 | 10.24 | 11.40 | 9.00 |
| 35 | 10.20 | 10.84 | 12.00 | 9.60 |
| 37 | 10.80 | 11.44 | 12.60 | 10.20 |
| 39 | 11.40 | 12.04 | 13.20 | 10.80 |
| 41 | 12.00 | 12.64 | 13.80 | 11.40 |
| 43 | 12.60 | 13.24 | 14.40 | 12.00 |
| 45 | 13.20 | 13.84 | 15.00 | 12.60 |
| 47 | 13.80 | 14.44 | 15.60 | 13.20 |
| 49 | 14.40 | 15.04 | 16.20 | 13.80 |
| 51 | 15.00 | 15.64 | 16.80 | 14.40 |
| 53 | 15.60 | 16.24 | 17.40 | 15.00 |
| 55 | 16.20 | 16.84 | 18.00 | 15.60 |
| 57 | 16.80 | 17.44 | 18.60 | 16.20 |
| 59 | 17.40 | 18.04 | 19.20 | 16.80 |
| 61 | 18.00 | 18.64 | 19.80 | 17.40 |
| 63 | 18.60 | 19.24 | 20.40 | 18.00 |
| 65 | 19.20 | 19.84 | 21.00 | 18.60 |
| 67 | 19.80 | 20.44 | 21.60 | 19.20 |
| 69 | 20.40 | 21.04 | 22.20 | 19.80 |
| 71 | 21.00 | 21.64 | 22.80 | 20.40 |

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -55° C~85° C.
3. 接触电阻: ≤40mΩ(DC20mV最大电压/10mA最大电流).
4. 额定电压: 30V AC.
5. 额定电流: 0.2A DC.
6. 绝缘电阻: ≥500C500V).
7. 产品料号:

适用扁平线(Applicable Flat Cable)

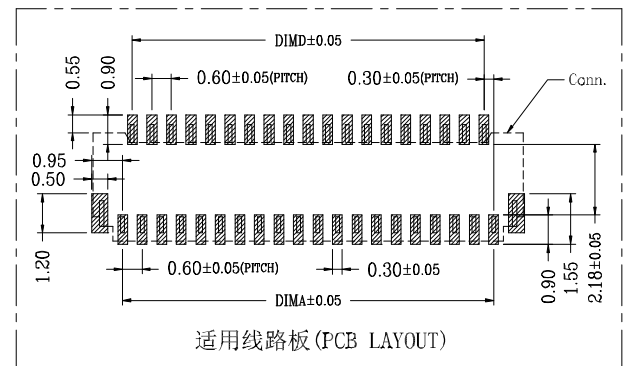

适用线路板(PCB LAYOUT)



般公差(TOLERANCE)
X ±.50 XX ±.10
X ±.20 XXX ±.05
ANGLES ±°

深圳市华灿天禄电子有限公司

| | | | | |
|------------|------------------------|-----------|----------|------------------|
| 品名(TITLE) | 0.3 Pitch掀盖卧式下接(H=1.0) | | 制图(DR) | Anlan |
| 料号(DWG.NO) | HC-FPC-03-10-NRLTAG | | 校对(CHKD) | 王涛 |
| 比例(SCALE) | 1:1 | 单位(UNITS) | mm | 张数(SHEET) 1 OF 1 |
| 尺寸(SIZE) | A4 | REV | A | 审核(APPD) 黄志明 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [HCTL](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)